



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Platinum 8160)

**SPECint®2006 = Not Run**

**SPECint\_base2006 = 75.2**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Apr-2017

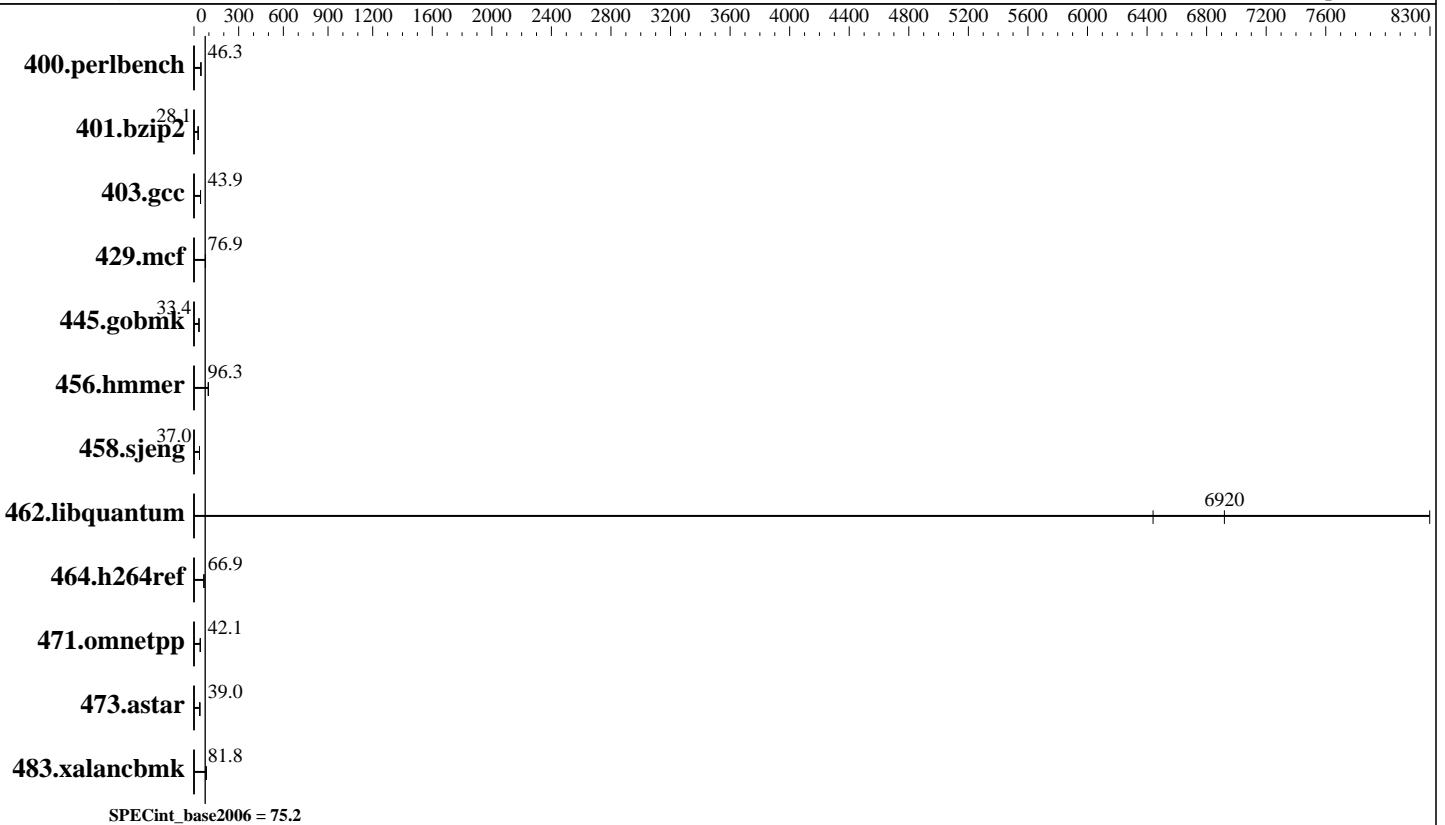

## Hardware

**CPU Name:** Intel Xeon Platinum 8160  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.70 GHz  
**CPU MHz:** 2100  
**FPU:** Integrated  
**CPU(s) enabled:** 48 cores, 2 chips, 24 cores/chip  
**CPU(s) orderable:** 1, 2 chip(s)  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 1 MB I+D on chip per core  
**L3 Cache:** 33 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
**Disk Subsystem:** 1 x 480 GB SATA SSD, RAID 0  
**Other Hardware:** None

## Software

**Operating System:** Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Kernel 3.10.0-693.el7.x86\_64  
**Compiler:** C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
**Auto Parallel:** Yes  
**File System:** xfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32/64-bit  
**Peak Pointers:** Not Applicable  
**Other Software:** Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

SPECint2006 =

Not Run

SPECint\_base2006 =

75.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	211	46.4	<u>211</u>	<u>46.3</u>	211	46.3						
401.bzip2	347	27.8	343	28.1	<u>344</u>	<u>28.1</u>						
403.gcc	184	43.8	183	43.9	<u>184</u>	<u>43.9</u>						
429.mcf	119	76.4	<u>119</u>	<u>76.9</u>	118	77.5						
445.gobmk	<u>314</u>	<u>33.4</u>	314	33.5	314	33.4						
456.hammer	<u>96.9</u>	<u>96.3</u>	96.8	96.4	96.9	96.3						
458.sjeng	<u>327</u>	<u>37.0</u>	327	37.0	328	36.9						
462.libquantum	3.22	6440	2.50	8300	<u>2.99</u>	<u>6920</u>						
464.h264ref	331	66.9	<u>331</u>	<u>66.9</u>	332	66.6						
471.omnetpp	149	41.9	146	42.8	<u>148</u>	<u>42.1</u>						
473.astar	181	38.9	180	39.0	<u>180</u>	<u>39.0</u>						
483.xalancbmk	<u>84.3</u>	<u>81.8</u>	84.2	82.0	84.3	81.8						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
irqbalance disabled with "systemctl stop irqbalance"  
tuned profile set with "tuned-adm profile throughput-performance"

## Platform Notes

BIOS Configuration:  
Intel Hyper-Threading set to Disabled  
Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Workload Profile set to General Peak Frequency Compute  
Energy/Performance Bias set to Maximum Performance  
Workload Profile set to Custom  
NUMA Group Size Optimization set to Flat  
Uncore Frequency Scaling set to Auto  
Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on bl460c16 Fri Dec 8 12:37:45 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Platinum 8160)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 75.2**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 24
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
cache size : 33792 KB

```

```

From /proc/meminfo
MemTotal:      197747128 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

```

```

uname -a:
Linux bl460c16 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57 EDT 2017
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 8 12:33

```

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  839G  35G  805G   5% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 11/14/2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Platinum 8160)

SPECint2006 = Not Run

SPECint\_base2006 = 75.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

## Platform Notes (Continued)

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "48"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

SPECint2006 =

Not Run

SPECint\_base2006 =

75.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Nov-2017

Software Availability: Apr-2017

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

```

## Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant BL460c Gen10  
(2.10 GHz, Intel Xeon Platinum 8160)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 75.2**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 14 11:30:13 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 June 2018.