SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.19

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

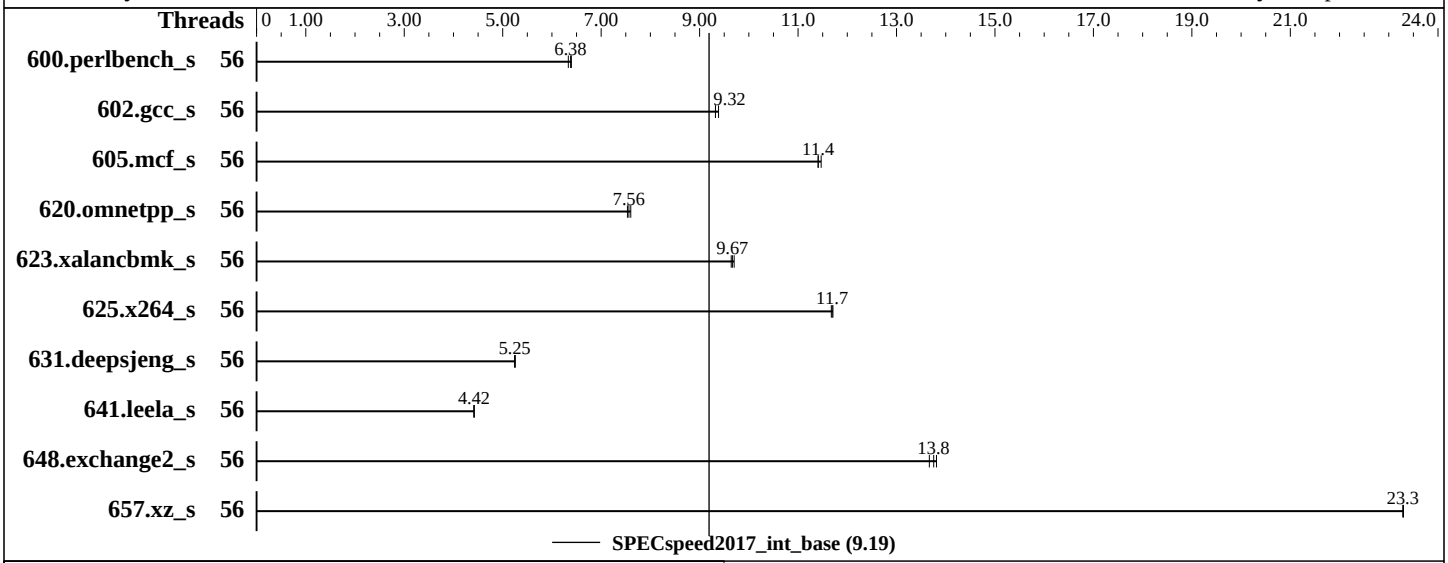

Hardware

CPU Name:	Intel Xeon Platinum 8180M
Max MHz.:	3800
Nominal:	2500
Enabled:	56 cores, 2 chips
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Storage:	1 x 960 GB SATA SSD, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.3 (Maipo), Kernel 3.10.0-514.6.1.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc: jemalloc memory allocator library V5.0.1; jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; jemalloc: sources avilable from jemalloc.net or releases

SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen10
(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017_int_base = 9.19

SPECspeed2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	56	280	6.33	**278**	**6.38**	278	6.39							
602.gcc_s	56	424	9.38	**427**	**9.32**	427	9.32							
605.mcf_s	56	412	11.5	**414**	**11.4**	414	11.4							
620.omnetpp_s	56	215	7.60	**216**	**7.56**	216	7.53							
623.xalancbmk_s	56	146	9.70	**147**	**9.67**	147	9.64							
625.x264_s	56	151	11.7	**151**	**11.7**	151	11.7							
631.deepsjeng_s	56	**273**	**5.25**	273	5.26	273	5.24							
641.leela_s	56	**386**	**4.42**	386	4.42	386	4.42							
648.exchange2_s	56	215	13.7	**214**	**13.8**	213	13.8							
657.xz_s	56	265	23.3	**265**	**23.3**	265	23.3							

SPECspeed2017_int_base = 9.19

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set wtih "tuned-adm profile throughput-performance"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/spec2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
```

Platform Notes

```
BIOS Configuration:
 Intel Hyperthreading set to Disabled
 Thermal Configuration set to Maximum Cooling
 Memory Patrol Scrubbing set to Disabled
 LLC Prefetcher set to Enabled
 LLC Dead Line Allocation set to Disabled
 Workload Pofile set to General Peak Frequency Compute
```

(Continued on next page)

Platform Notes (Continued)

```
  Energy/Performance Bias set to Maximum Performance
  Uncore Frequency Scaling set to Auto
 Workload Pofile set to General Peak Frequency Compute
   NUMA Group Size Optimization set to Flat

Sysinfo program /spec2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on DL380-sys2-RHEL73 Tue Oct  3 10:26:15 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
      2  "physical id"s (chips)
      56 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                56
     On-line CPU(s) list:   0-55
     Thread(s) per core:    1
     Core(s) per socket:    28
     Socket(s):             2
     NUMA node(s):          2
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
     Stepping:              4
     CPU MHz:               2500.000
     BogoMIPS:              5005.43
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
```

(Continued on next page)

Platform Notes (Continued)

```
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-27
      NUMA node1 CPU(s):     28-55

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    node 0 size: 97963 MB
    node 0 free: 94241 MB
    node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
    53 54 55
    node 1 size: 98303 MB
    node 1 free: 95472 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       197569032 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.3 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.3"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

  uname -a:
     Linux DL380-sys2-RHEL73 3.10.0-514.6.1.el7.x86_64 #1 SMP Sat Dec 10 11:15:38 EST 2016
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Oct 3 07:55
```

(Continued on next page)

Platform Notes (Continued)

```
 SPEC is set to: /spec2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   889G   29G  861G   4% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE U30 09/29/2017
   Memory:
    24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
      657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:
-m64 -std=c11

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-03 12:26:15-0400.
Report generated on 2018-10-31 14:35:12 by CPU2017 PS formatter v6067.
Originally published on 2017-10-31.