



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

**SPECSpeed®2017\_int\_base = 9.80**

**SPECSpeed®2017\_int\_peak = 10.1**

CPU2017 License: 9019


Test Date: Oct-2017

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Sep-2017

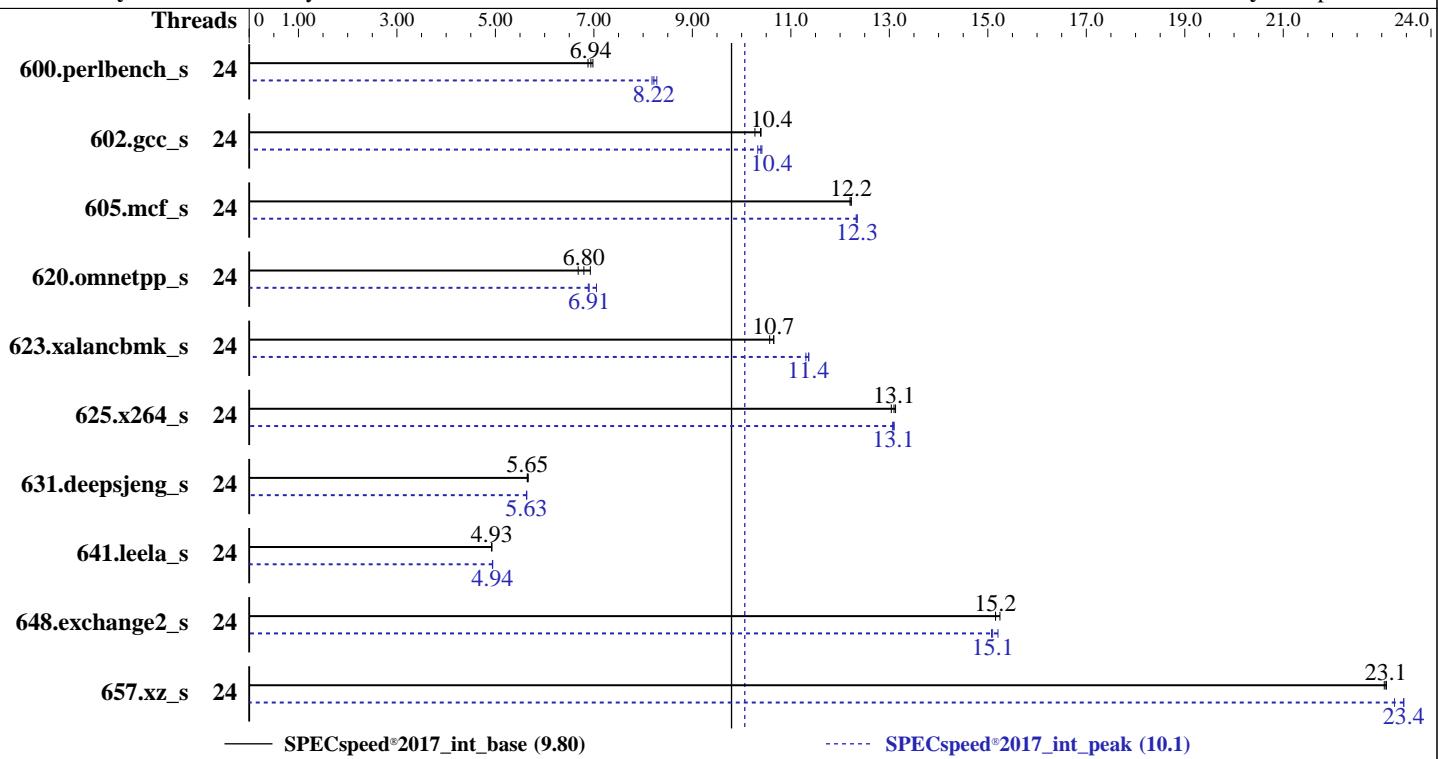

— SPECSpeed®2017\_int\_base (9.80)

----- SPECSpeed®2017\_int\_peak (10.1)

### Hardware

CPU Name: Intel Xeon Gold 6146  
 Max MHz: 4200  
 Nominal: 3200  
 Enabled: 24 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 600 GB SAS HDD, 10K RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 3.2.1d released Jul-2017  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1;  
 jemalloc: configured and built at default for  
 32bit (i686) and 64bit (x86\_64) targets  
 Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

**SPECspeed®2017\_int\_base = 9.80**

**SPECspeed®2017\_int\_peak = 10.1**

CPU2017 License: 9019

Test Date: Oct-2017

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	254	6.98	<b>256</b>	<b>6.94</b>	258	6.88	24	<b>216</b>	<b>8.22</b>	217	8.18	214	8.28		
602.gcc_s	24	383	10.4	388	10.3	<b>383</b>	<b>10.4</b>	24	386	10.3	<b>383</b>	<b>10.4</b>	382	10.4		
605.mcf_s	24	387	12.2	<b>386</b>	<b>12.2</b>	386	12.2	24	<b>382</b>	<b>12.3</b>	382	12.3	383	12.3		
620.omnetpp_s	24	235	6.93	244	6.68	<b>240</b>	<b>6.80</b>	24	231	7.05	237	6.89	<b>236</b>	<b>6.91</b>		
623.xalancbmk_s	24	<b>133</b>	<b>10.7</b>	134	10.6	133	10.7	24	125	11.3	125	11.4	<b>125</b>	<b>11.4</b>		
625.x264_s	24	135	13.0	134	13.1	<b>135</b>	<b>13.1</b>	24	<b>135</b>	<b>13.1</b>	135	13.1	135	13.1		
631.deepsjeng_s	24	<b>253</b>	<b>5.65</b>	253	5.67	254	5.65	24	254	5.64	255	5.63	<b>254</b>	<b>5.63</b>		
641.leela_s	24	<b>346</b>	<b>4.93</b>	346	4.93	346	4.92	24	345	4.94	<b>345</b>	<b>4.94</b>	345	4.94		
648.exchange2_s	24	194	15.2	<b>194</b>	<b>15.2</b>	193	15.2	24	195	15.1	193	15.2	<b>195</b>	<b>15.1</b>		
657.xz_s	24	<b>268</b>	<b>23.1</b>	268	23.1	268	23.1	24	<b>264</b>	<b>23.4</b>	264	23.4	266	23.3		
SPECspeed®2017_int_base =				<b>9.80</b>				SPECspeed®2017_int_peak =				<b>10.1</b>				

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Disabled

CPU performance set to Enterprise

Power Performance Tuning set to OS

SNC set to Disabled

IMC Interleaving set to Auto

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

SPECspeed®2017\_int\_base = 9.80

SPECspeed®2017\_int\_peak = 10.1

CPU2017 License: 9019

Test Date: Oct-2017

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Sep-2017

## Platform Notes (Continued)

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-djj4 Tue Oct 24 01:38:16 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
  2 "physical id"s (chips)
  24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings   : 12
  physical 0: cores 0 1 2 3 4 8 9 11 17 18 19 20
  physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                24
On-line CPU(s) list:  0-23
Thread(s) per core:   1
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
Stepping:               4
CPU MHz:                1337.603
CPU max MHz:           4200.0000
CPU min MHz:           1200.0000
BogoMIPS:              6399.99
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                25344K
NUMA node0 CPU(s):     0-11
NUMA node1 CPU(s):     12-23
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

SPECspeed®2017\_int\_base = 9.80

SPECspeed®2017\_int\_peak = 10.1

CPU2017 License: 9019

Test Date: Oct-2017

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Sep-2017

## Platform Notes (Continued)

```
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp
hwp_act_window hwp_epp hwp_pkg_req intel_pt tpr_shadow vmmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqmq_llc cqmq_occrap_llc
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 191913 MB
node 0 free: 191249 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 193504 MB
node 1 free: 192911 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

From /proc/meminfo

```
MemTotal:      394667572 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017\_int\_base = 9.80

SPECspeed®2017\_int\_peak = 10.1

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
uname -a:  
Linux linux-djj4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Jan 8 05:24  
  
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdal      xfs   559G  115G  445G  21% /  
  
Additional information from dmidecode follows.  WARNING: Use caution when you interpret  
this section. The 'dmidecode' program reads system data which is "intended to allow  
hardware to be accurately determined", but the intent may not be met, as there are  
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
BIOS Cisco Systems, Inc. B200M5.3.2.1d.5.0727171353 07/27/2017  
Memory:  
24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666  
  
(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====| 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
C     | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====| 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
C++    | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====| 648.exchange2_s(base, peak)  
Fortran |  
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017\_int\_base = 9.80

SPECspeed®2017\_int\_peak = 10.1

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

**SPECspeed®2017\_int\_base = 9.80**

**SPECspeed®2017\_int\_peak = 10.1**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

SPECspeed®2017\_int\_base = 9.80

SPECspeed®2017\_int\_peak = 10.1

CPU2017 License: 9019

Test Date: Oct-2017

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 6146,  
3.20GHz)

SPECSpeed®2017\_int\_base = 9.80

SPECSpeed®2017\_int\_peak = 10.1

CPU2017 License: 9019

Test Date: Oct-2017

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Sep-2017

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk\_s: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.2 on 2017-10-24 01:38:16-0400.

Report generated on 2020-08-04 16:16:42 by CPU2017 PDF formatter v6255.

Originally published on 2017-12-09.