SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 540

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

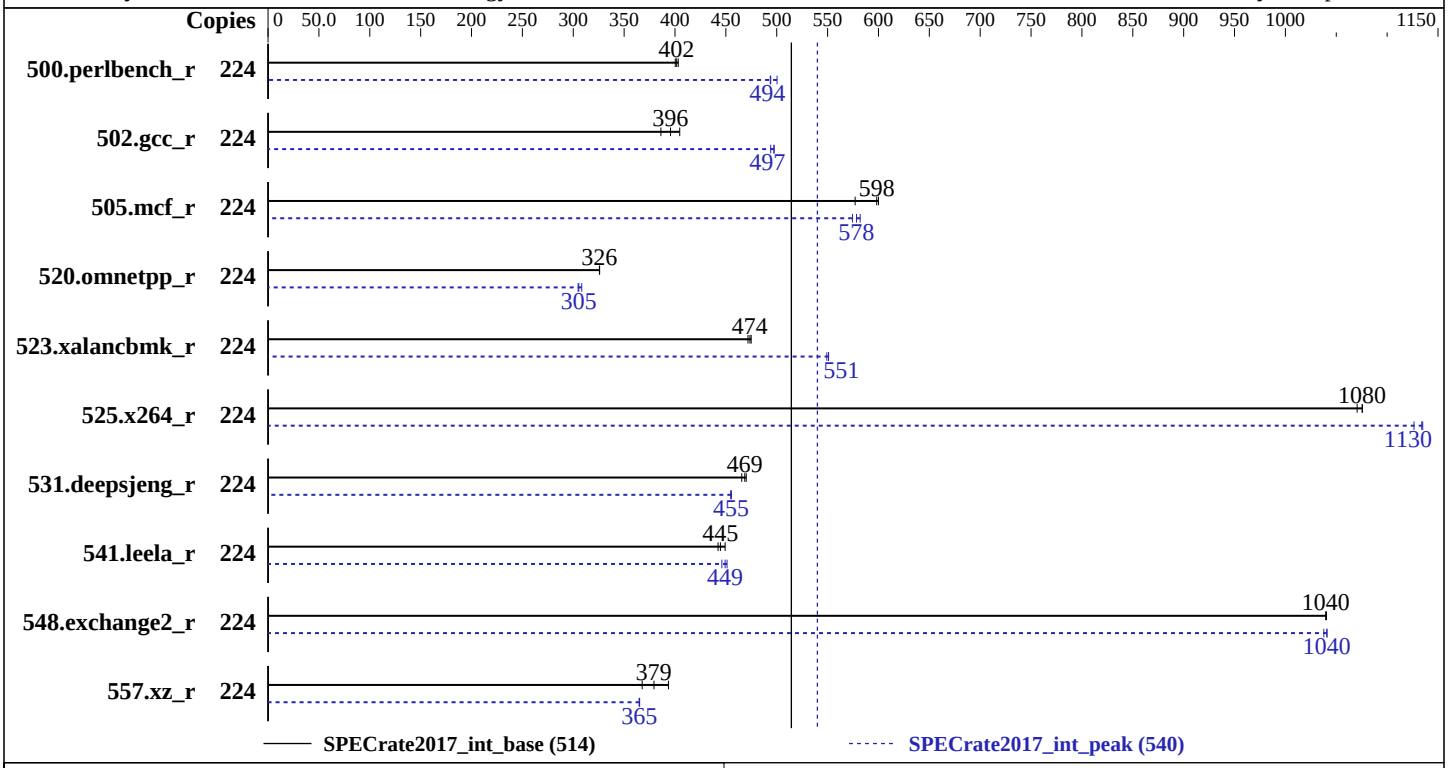

Hardware

CPU Name:	Intel Xeon Platinum 8176
Max MHz.:	3800
Nominal:	2100
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 800 GB SAS SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version IVE111I 1.01 released Aug-2017
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.0.1; jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; jemalloc: sources avilable from jemalloc.net or releases

SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 540

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	**888**	**402**	884	403	891	400	224	713	500	722	494	**722**	**494**
502.gcc_r	224	**802**	**396**	821	386	784	405	224	**638**	**497**	642	494	638	497
505.mcf_r	224	603	600	**605**	**598**	627	577	224	622	582	**626**	**578**	630	575
520.omnetpp_r	224	902	326	**902**	**326**	902	326	224	953	308	964	305	**962**	**305**
523.xalancbmk_r	224	501	472	**499**	**474**	498	475	224	**429**	**551**	431	549	429	551
525.x264_r	224	366	1070	365	1080	**365**	**1080**	224	346	1130	**346**	**1130**	348	1130
531.deepsjeng_r	224	546	470	**548**	**469**	551	466	224	564	455	**564**	**455**	564	455
541.leela_r	224	826	449	839	442	**834**	**445**	224	**826**	**449**	832	446	822	451
548.exchange2_r	224	564	1040	564	1040	**564**	**1040**	224	**564**	**1040**	564	1040	566	1040
557.xz_r	224	615	394	**638**	**379**	658	368	224	**662**	**365**	663	365	662	365

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 540

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
```

(Continued on next page)

Platform Notes (Continued)

```
SNC set to Enable
Hardware Prefetcher set to Disable
MONITORMWAIT set to Enable
Execute Disable Bit set to Disable
Intel Virtualization Technology set to Disable
DCA set to Enable
XPT Prefetcher set to Enable
 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on SN850 Mon Nov 20 17:29:43 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
       4  "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                224
      On-line CPU(s) list:   0-223
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
      Stepping:              4
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU MHz:               2095.062
      BogoMIPS:              4190.12
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
      NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
      NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
      NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
      NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
   129 133 134 135
   node 0 size: 193130 MB
   node 0 free: 192352 MB
   node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
   132 136 137 138 139
   node 1 size: 193528 MB
   node 1 free: 192983 MB
   node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
   155 156 157 161 162 163
   node 2 size: 193528 MB
   node 2 free: 192983 MB
   node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
   159 160 164 165 166 167
   node 3 size: 193528 MB
   node 3 free: 192982 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
   183 184 185 189 190 191
   node 4 size: 193528 MB
   node 4 free: 192935 MB
   node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
   187 188 192 193 194 195
   node 5 size: 193528 MB
   node 5 free: 192887 MB
   node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
   210 211 212 213 217 218 219
   node 6 size: 193528 MB
   node 6 free: 192994 MB
   node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
   209 214 215 216 220 221 222 223
   node 7 size: 193525 MB
   node 7 free: 192974 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  21  21  21  21
     1:  11  10  21  21  21  21  21  21
     2:  21  21  10  11  21  21  21  21
     3:  21  21  11  10  21  21  21  21
     4:  21  21  21  21  10  11  21  21
     5:  21  21  21  21  11  10  21  21
     6:  21  21  21  21  21  21  10  11
     7:  21  21  21  21  21  21  11  10

 From /proc/meminfo
    MemTotal:       1584974636 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

(Continued on next page)

Platform Notes (Continued)

```
 uname -a:
    Linux SN850 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Nov 20 17:28

 SPEC is set to: /home/cpu2017.1.0.2.ic18.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   836G   20G  816G   3% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[IVE111I-1.01]- 08/11/2017
   Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
     525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`

(Continued on next page)

Peak Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):
-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):
-m64

523.xalancbmk_r: -m32

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-20 04:29:43-0500.
Report generated on 2018-10-31 15:09:11 by CPU2017 PS formatter v6067.
Originally published on 2017-12-15.