SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 913

SPECrate2017_fp_peak = 929

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

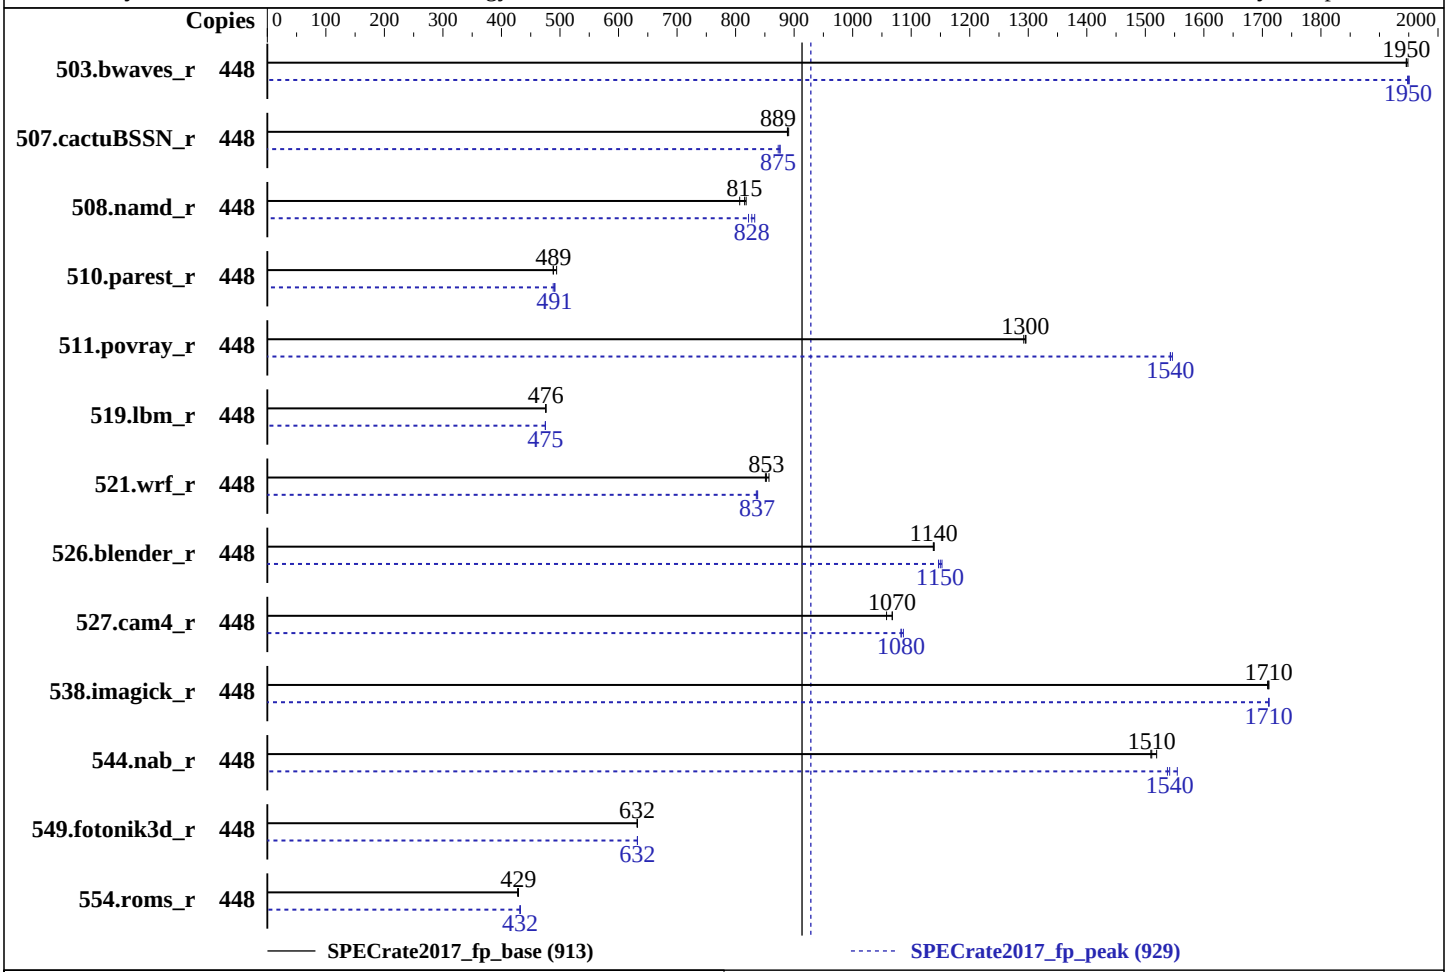

Hardware

CPU Name:	Intel Xeon Platinum 8176
Max MHz.:	3800
Nominal:	2100
Enabled:	224 cores, 8 chips, 2 threads/core
Orderable:	2,4,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	800 GB tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version PSE105X 1.00 released Aug-2017
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 913

SPECrate2017_fp_peak = 929

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	448	**2308**	**1950**	2309	1950	2305	1950	448	**2304**	**1950**	2306	1950	2303	1950
507.cactuBSSN_r	448	**638**	**889**	637	891	638	889	448	647	876	650	873	**648**	**875**
508.namd_r	448	520	818	527	807	**522**	**815**	448	**514**	**828**	518	822	511	833
510.parest_r	448	2371	494	**2398**	**489**	2399	488	448	2399	488	2385	491	**2388**	**491**
511.povray_r	448	809	1290	**808**	**1300**	807	1300	448	678	1540	677	1550	**678**	**1540**
519.lbm_r	448	993	476	**992**	**476**	992	476	448	994	475	**994**	**475**	994	475
521.wrf_r	448	1171	857	1179	851	**1177**	**853**	448	**1199**	**837**	1201	835	1198	838
526.blender_r	448	**599**	**1140**	600	1140	599	1140	448	592	1150	**593**	**1150**	595	1150
527.cam4_r	448	734	1070	741	1060	**734**	**1070**	448	724	1080	721	1090	**723**	**1080**
538.imagick_r	448	652	1710	**651**	**1710**	651	1710	448	**651**	**1710**	651	1710	651	1710
544.nab_r	448	**499**	**1510**	500	1510	496	1520	448	485	1550	490	1540	**489**	**1540**
549.fotonik3d_r	448	2763	632	2761	632	**2762**	**632**	448	2761	632	2761	632	**2761**	**632**
554.roms_r	448	**1660**	**429**	1660	429	1665	428	448	1647	432	**1648**	**432**	1649	432

SPECrate2017_fp_base = 913

SPECrate2017_fp_peak = 929

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
 echo 50000     > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
 echo 240000000 > /proc/sys/kernel/sched_latency_ns
 echo 5000000   > /proc/sys/kernel/sched_migration_cost_ns
 echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
 echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
```

(Continued on next page)

General Notes (Continued)

```
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
Hardware Prefetcher set to Disable
DCU Streamer Prefetcher set to Disable
MONITORMWAIT set to Enable
Execute Disable Bit set to Disable
Trusted Execution Technology set to Enable
Per Core Pstate set to Disable
XPT Prefetcher set to Enable
Stale AtoS set to Enable
LLC Deadline Alloc set to Enable
 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-boxi Tue Nov  7 02:03:45 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
       8  "physical id"s (chips)
       448 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
```

(Continued on next page)

Platform Notes (Continued)

```
       28 29 30
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
      physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                448
      On-line CPU(s) list:   0-447
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             8
      NUMA node(s):          16
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
      Stepping:              4
      CPU MHz:               2095.085
      BogoMIPS:              4190.17
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
      NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
      NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
      NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
      NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
      NUMA node8 CPU(s):
      112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
      NUMA node9 CPU(s):
      116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
      NUMA node10 CPU(s):
      140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
      NUMA node11 CPU(s):
      144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391
      NUMA node12 CPU(s):
```


(Continued on next page)

Platform Notes (Continued)

```
      168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415
      NUMA node13 CPU(s):
      172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419
      NUMA node14 CPU(s):
      196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443
      NUMA node15 CPU(s):
      200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240
    241 245 246 247
    node 0 size: 192984 MB
    node 0 free: 192414 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243
    244 248 249 250 251
    node 1 size: 193528 MB
    node 1 free: 192980 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266
    267 268 269 273 274 275
    node 2 size: 193528 MB
    node 2 free: 179554 MB
    node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270
    271 272 276 277 278 279
    node 3 size: 193528 MB
    node 3 free: 193009 MB
    node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294
    295 296 297 301 302 303
    node 4 size: 193528 MB
    node 4 free: 192997 MB
    node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298
    299 300 304 305 306 307
    node 5 size: 193528 MB
    node 5 free: 193004 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317
322 323 324 325 329 330 331
node 6 size: 193528 MB
node 6 free: 193014 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335
node 7 size: 193528 MB
node 7 free: 192996 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339
343 344 345 350 351 352 353 357 358 359
node 8 size: 193528 MB
node 8 free: 193009 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346
347 348 349 354 355 356 360 361 362 363
node 9 size: 193528 MB
node 9 free: 192644 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367
371 372 373 378 379 380 381 385 386 387
node 10 size: 193528 MB
node 10 free: 193014 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374
375 376 377 382 383 384 388 389 390 391
node 11 size: 193528 MB
node 11 free: 193015 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395
399 400 401 406 407 408 409 413 414 415
node 12 size: 193528 MB
node 12 free: 192958 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402
403 404 405 410 411 412 416 417 418 419
node 13 size: 193528 MB
node 13 free: 193021 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423
427 428 429 434 435 436 437 441 442 443
node 14 size: 193528 MB
node 14 free: 193021 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430
431 432 433 438 439 440 444 445 446 447
node 15 size: 193523 MB
node 15 free: 192987 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  1:  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  2:  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20
  3:  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20
  4:  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20
```

(Continued on next page)

Platform Notes (Continued)

```
     5:  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20
     6:  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20
     7:  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20
     8:  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20
     9:  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20
    10:  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20
    11:  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20
    12:  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20
    13:  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20
    14:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20
    15:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10

  From /proc/meminfo
     MemTotal:       3170207908 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-boxi 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 7 02:00

  SPEC is set to: /home/cpu2017.1.0.2.ic18.0
     Filesystem     Type   Size  Used Avail Use% Mounted on
     tmpfs          tmpfs  800G   11G  790G   2% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
```

(Continued on next page)

Platform Notes (Continued)

```
   BIOS Lenovo -[PSE105X-1.00]- 08/17/2017
   Memory:
    96x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

519.lbm_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

538.imagick_r: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

544.nab_r: `Same as 519.lbm_r`

C++ benchmarks:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:

503.bwaves_r: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

549.fotonik3d_r: `Same as 503.bwaves_r`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Peak Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-06 13:03:45-0500.
Report generated on 2018-10-31 15:13:56 by CPU2017 PS formatter v6067.
Originally published on 2017-12-15.