# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.30 GHz, AMD EPYC 7451)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = Not Run

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Nov-2017
**Hardware Availability:** Nov-2017
**Software Availability:** Sep-2017

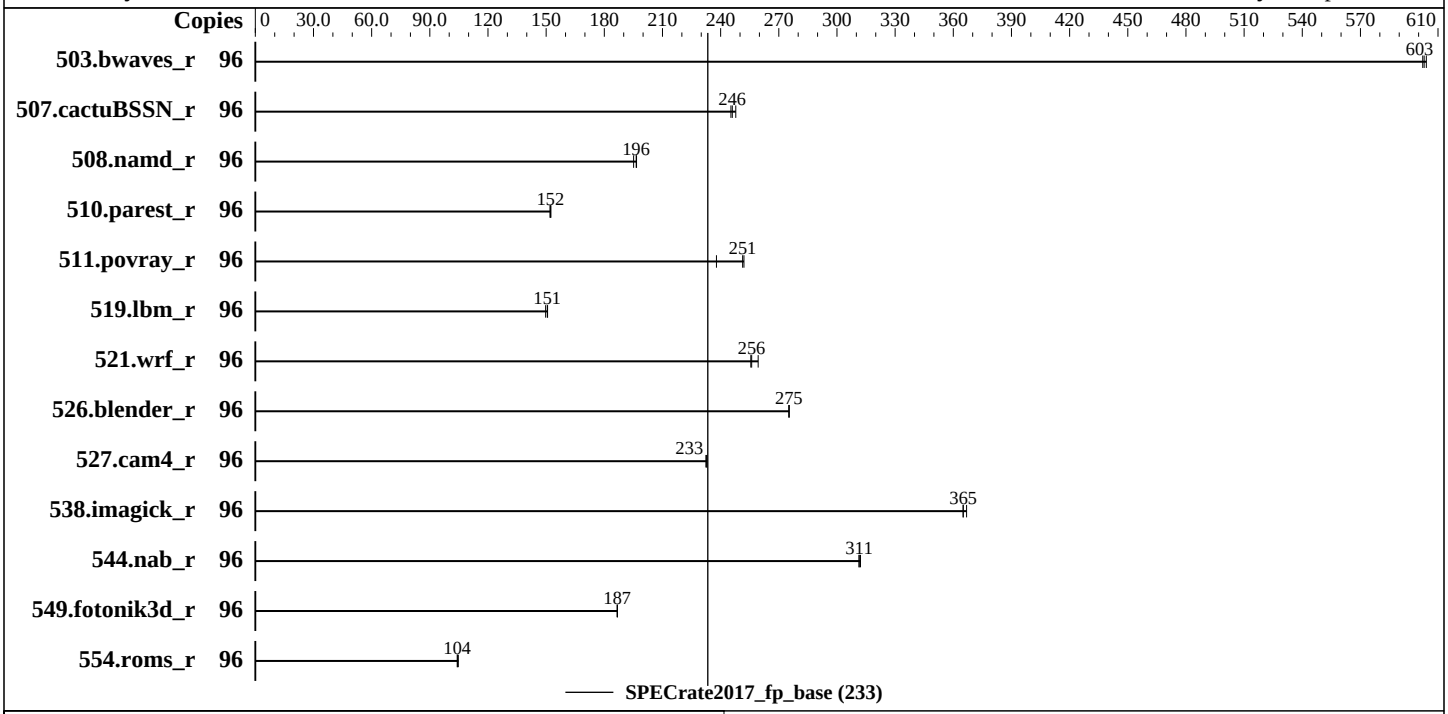


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7451 |
| Max MHz.: | 3200 |
| Nominal: | 2300 |
| Enabled: | 48 cores, 2 chips, 2 threads/core |
| Orderable: | 1, 2 chip(s) |
| Cache L1: | 64 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 64 MB I+D on chip per chip, 8 MB shared / 3 cores |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L) |
| Storage: | 1 x 300 GB 15 K RPM SAS, RAID 0 |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 (x86_64) SP3<br>Kernel 4.4.73-5-default |
| Compiler: | C/C++: Version 1.0.0 of AOCC<br>Fortran: Version 4.8.2 of GCC |
| Parallel: | No |
| Firmware: | HPE BIOS Version A40 released Nov-2017 (tested with A40 (11/10/2017)) |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc general purpose malloc implementation<br>v4.5.0 |

# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(2.30 GHz, AMD EPYC 7451)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = Not Run

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Nov-2017
**Hardware Availability:** Nov-2017
**Software Availability:** Sep-2017

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 96 | **1597** | **603** | 1594 | 604 | 1599 | 602 | | | | | | | |
| 507.cactuBSSN_r | 96 | **494** | **246** | 495 | 245 | 490 | 248 | | | | | | | |
| 508.namd_r | 96 | 464 | 197 | **464** | **196** | 467 | 195 | | | | | | | |
| 510.parest_r | 96 | 1647 | 152 | **1650** | **152** | 1653 | 152 | | | | | | | |
| 511.povray_r | 96 | 889 | 252 | 942 | 238 | **892** | **251** | | | | | | | |
| 519.lbm_r | 96 | **672** | **151** | 676 | 150 | 671 | 151 | | | | | | | |
| 521.wrf_r | 96 | 841 | 256 | **840** | **256** | 829 | 259 | | | | | | | |
| 526.blender_r | 96 | 531 | 275 | 531 | 275 | **531** | **275** | | | | | | | |
| 527.cam4_r | 96 | 722 | 232 | 721 | 233 | **722** | **233** | | | | | | | |
| 538.imagick_r | 96 | 651 | 367 | 654 | 365 | **654** | **365** | | | | | | | |
| 544.nab_r | 96 | 518 | 312 | 519 | 311 | **519** | **311** | | | | | | | |
| 549.fotonik3d_r | 96 | 2003 | 187 | 2004 | 187 | **2004** | **187** | | | | | | | |
| 554.roms_r | 96 | 1464 | 104 | 1457 | 105 | **1464** | **104** | | | | | | | |

**SPECrate2017_fp_base = 233**

**SPECrate2017_fp_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

## Platform Notes

```
 BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Performance Determinism set to Power Deterministic
  Memory Patrol Scrubbing set to Disabled
  Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C6 State
  Processor Power and Utilization Monitoring set to Disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-d9tl Fri Jul 14 17:50:48 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7451 24-Core Processor
       2  "physical id"s (chips)
       96 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5
       physical 1: cores 0 1 2 3 4 5

  From lscpu:
       Architecture:          x86_64
       CPU op-mode(s):        32-bit, 64-bit
       Byte Order:            Little Endian
       CPU(s):                96
       On-line CPU(s) list:   0-95
       Thread(s) per core:    2
       Core(s) per socket:    24
       Socket(s):             2
       NUMA node(s):          8
       Vendor ID:             AuthenticAMD
       CPU family:            23
       Model:                 1
       Model name:            AMD EPYC 7451 24-Core Processor
       Stepping:              2
       CPU MHz:               2300.000
       CPU max MHz:           2300.0000
       CPU min MHz:           1200.0000
       BogoMIPS:              4591.29
       Virtualization:        AMD-V
       L1d cache:             32K
       L1i cache:             64K
       L2 cache:              512K
       L3 cache:              8192K
       NUMA node0 CPU(s):     0-5,48-53
       NUMA node1 CPU(s):     6-11,54-59
       NUMA node2 CPU(s):     12-17,60-65
       NUMA node3 CPU(s):     18-23,66-71
       NUMA node4 CPU(s):     24-29,72-77
       NUMA node5 CPU(s):     30-35,78-83
       NUMA node6 CPU(s):     36-41,84-89
       NUMA node7 CPU(s):     42-47,90-95
       Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
       constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
       pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
       rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
       osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
       hw_pstate npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
       pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
       clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
   node 0 size: 128846 MB
   node 0 free: 128630 MB
   node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
   node 1 size: 129021 MB
   node 1 free: 128818 MB
   node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
   node 2 size: 129021 MB
   node 2 free: 128814 MB
   node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
   node 3 size: 129021 MB
   node 3 free: 128837 MB
   node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
   node 4 size: 129021 MB
   node 4 free: 128829 MB
   node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
   node 5 size: 129021 MB
   node 5 free: 128833 MB
   node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
   node 6 size: 129021 MB
   node 6 free: 128828 MB
   node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
   node 7 size: 129020 MB
   node 7 free: 128825 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  16  16  16  32  32  32  32
     1:  16  10  16  16  32  32  32  32
     2:  16  16  10  16  32  32  32  32
     3:  16  16  16  10  32  32  32  32
     4:  32  32  32  32  10  16  16  16
     5:  32  32  32  32  16  10  16  16
     6:  32  32  32  32  16  16  10  16
     7:  32  32  32  32  16  16  16  10

 From /proc/meminfo
    MemTotal:       1056765756 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-d9tl 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Jul 12 08:32

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   238G   59G  179G  25% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE A40 11/10/2017
   Memory:
    16x UNKNOWN NOT AVAILABLE
    16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc

Fortran benchmarks:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-ljemalloc -lgfortran -lamdlibm

Benchmarks using both Fortran and C:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive
-z muldefs -ljemalloc

Benchmarks using Fortran, C, and C++:
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-finline-aggressive -O3(gfortran) -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-07-14 18:50:47-0400.
Report generated on 2019-02-21 12:44:54 by CPU2017 PS formatter v6067.
Originally published on 2018-01-14.