SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(1.70 GHz, Intel Xeon Bronze 3104)

SPECspeed2017_int_base = 4.06

SPECspeed2017_int_peak = 4.17

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

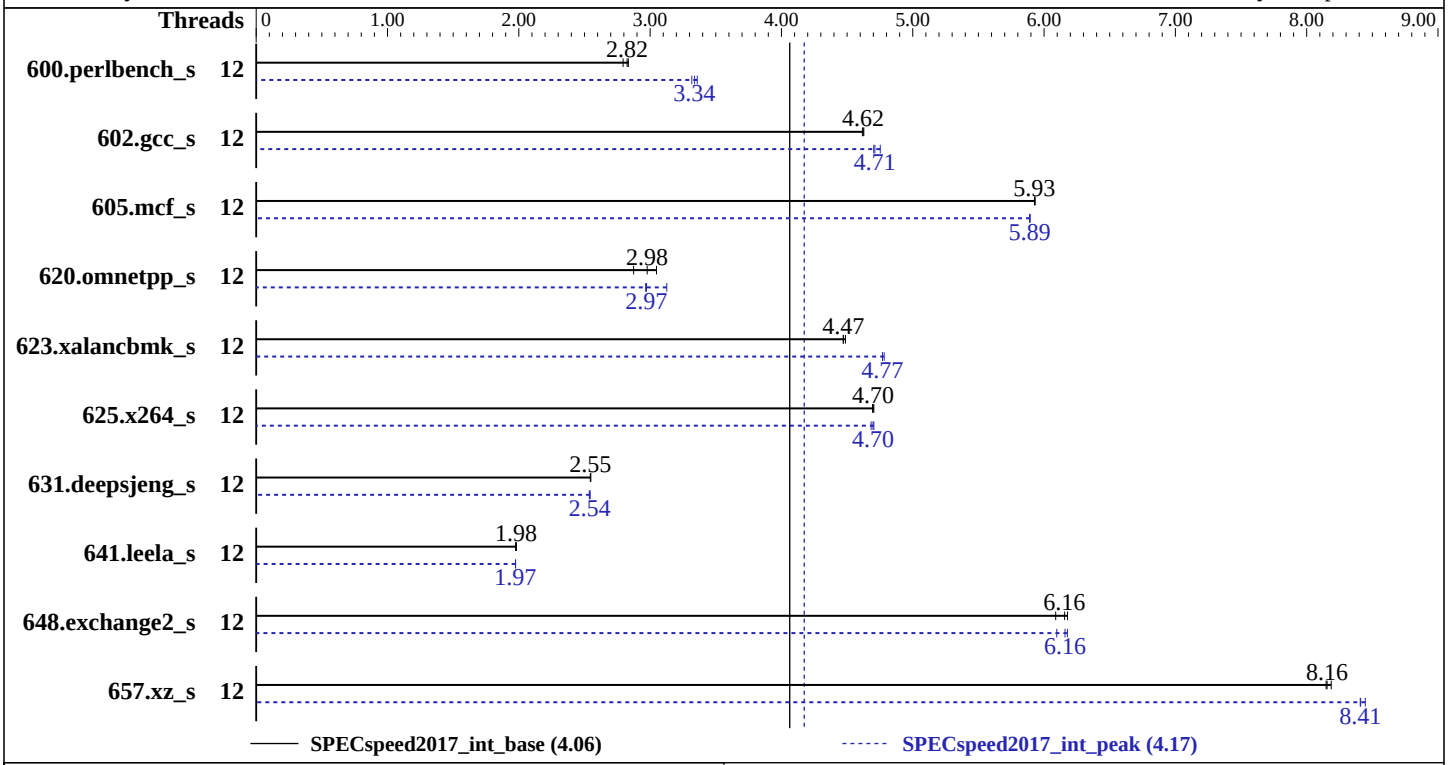

Hardware

CPU Name:	Intel Xeon Bronze 3104
Max MHz.:	1700
Nominal:	1700
Enabled:	12 cores, 2 chips
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	8.25 MB I+D on chip per chip
Other:	None
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2133)
Storage:	1 x 960 GB SATA SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.73-5-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.0.1; jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; jemalloc: sources available via jemalloc.net

SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen10
(1.70 GHz, Intel Xeon Bronze 3104)

SPECspeed2017_int_base = 4.06

SPECspeed2017_int_peak = 4.17

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	12	626	2.83	635	2.79	**628**	**2.82**	12	535	3.32	**532**	**3.34**	528	3.36
602.gcc_s	12	861	4.63	863	4.62	**862**	**4.62**	12	838	4.75	847	4.70	**845**	**4.71**
605.mcf_s	12	797	5.93	**796**	**5.93**	796	5.93	12	**801**	**5.89**	801	5.89	801	5.89
620.omnetpp_s	12	567	2.87	535	3.05	**548**	**2.98**	12	522	3.13	**549**	**2.97**	550	2.97
623.xalancbmk_s	12	316	4.49	317	4.47	**317**	**4.47**	12	**297**	**4.77**	297	4.77	296	4.78
625.x264_s	12	376	4.69	**375**	**4.70**	375	4.70	12	375	4.70	**376**	**4.70**	377	4.68
631.deepsjeng_s	12	562	2.55	563	2.54	**563**	**2.55**	12	**564**	**2.54**	564	2.54	565	2.54
641.leela_s	12	864	1.98	**861**	**1.98**	861	1.98	12	864	1.98	**864**	**1.97**	864	1.97
648.exchange2_s	12	**478**	**6.16**	476	6.18	483	6.09	12	**477**	**6.16**	476	6.18	482	6.10
657.xz_s	12	**758**	**8.16**	759	8.15	755	8.19	12	**735**	**8.41**	735	8.41	732	8.45

SPECspeed2017_int_base = 4.06

SPECspeed2017_int_peak = 4.17

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set wtih "tuned-adm profile throughput-performance"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Peak Frequency Compute
  Energy/Performance Bias set to Maximum Performance
```

(Continued on next page)

Platform Notes (Continued)

```
 Workload Profile set to Custom
  NUMA Group Size Optimization set to Flat
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-b7s1 Fri Dec  1 09:32:03 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
       2  "physical id"s (chips)
       12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 6
       siblings  : 6
       physical 0: cores 0 1 2 3 4 5
       physical 1: cores 0 1 2 3 4 5

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                12
      On-line CPU(s) list:   0-11
      Thread(s) per core:    1
      Core(s) per socket:    6
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
      Stepping:              4
      CPU MHz:               1696.032
      BogoMIPS:              3392.06
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              8448K
      NUMA node0 CPU(s):     0-2,6-8
      NUMA node1 CPU(s):     3-5,9-11
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)

Platform Notes (Continued)

```
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

 /proc/cpuinfo cache data
    cache size : 8448 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 6 7 8
   node 0 size: 96350 MB
   node 0 free: 94118 MB
   node 1 cpus: 3 4 5 9 10 11
   node 1 size: 96766 MB
   node 1 free: 96433 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10

 From /proc/meminfo
    MemTotal:       197751480 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
```

(Continued on next page)

Platform Notes (Continued)

```
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-b7s1 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Dec 1 09:29

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   852G   54G  799G   7% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE U30 10/11/2017
   Memory:
    24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2133

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
      peak) 657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
     641.leela_s(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Peak Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`

(Continued on next page)

Peak Portability Flags (Continued)

602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

623.xalancbmk_s: `-L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc`

631.deepsjeng_s: `Same as 620.omnetpp_s`

641.leela_s: `Same as 620.omnetpp_s`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

Peak Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks (except as noted below):
`-m64`

623.xalancbmk_s: `-m32`

Fortran benchmarks:
`-m64`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-01 10:32:02-0500.
Report generated on 2018-10-31 17:11:50 by CPU2017 PS formatter v6067.
Originally published on 2018-01-14.