SPEC® CPU2017 Floating Point Rate Result

Lenovo Global Technology

ThinkSystem SR860
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 301

SPECrate2017_fp_peak = 308

CPU2017 License:	9017	**Test Date:**	Dec-2017
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Nov-2017
Tested by:	Lenovo Global Technology	**Software Availability:**	Sep-2017

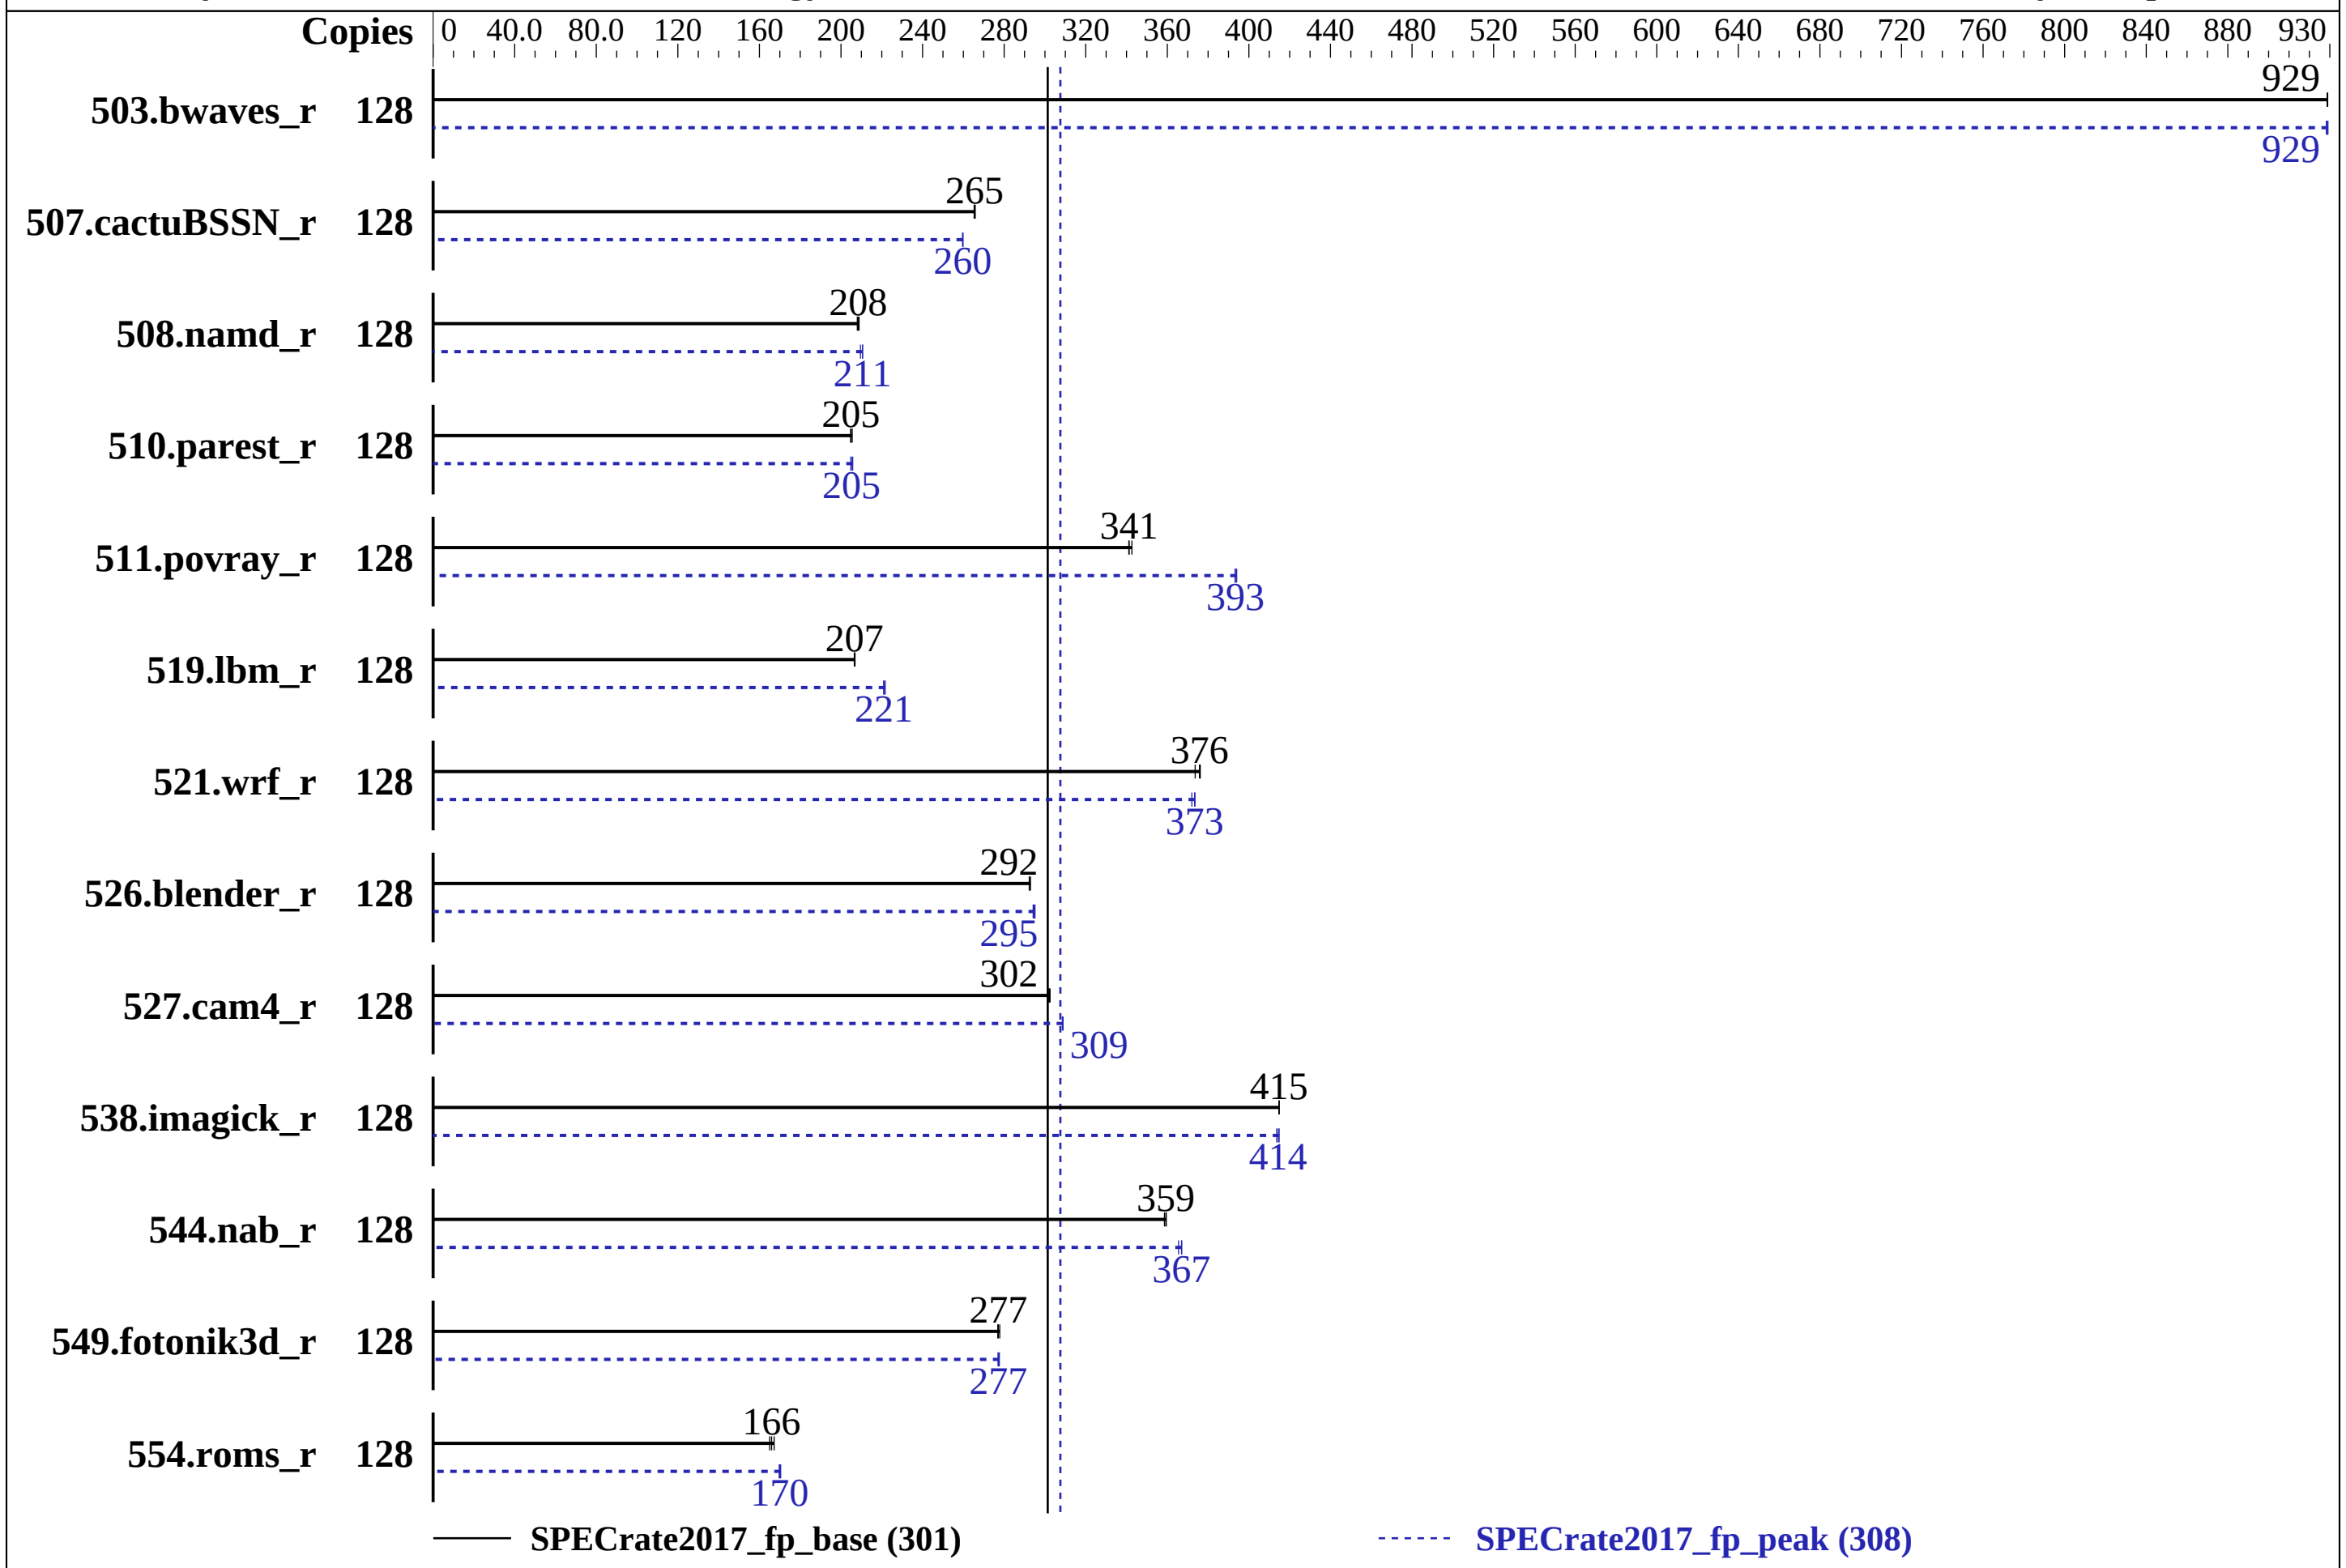

Hardware

CPU Name:	Intel Xeon Platinum 8153
Max MHz.:	2800
Nominal:	2000
Enabled:	64 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Storage:	1 x 800 GB SAS SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.4 (Maipo) Kernel 3.10.0-693.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version TEE117I 1.10 released Oct-2017
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

Lenovo Global Technology

ThinkSystem SR860
(2.00 GHz, Intel Xeon Platinum 8153)

SPECrate2017_fp_base = 301

SPECrate2017_fp_peak = 308

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Dec-2017
Hardware Availability: Nov-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1382	929	1382	929	**1382**	**929**	128	1382	929	1383	928	**1382**	**929**
507.cactuBSSN_r	128	611	265	610	266	**610**	**265**	128	624	260	**624**	**260**	624	260
508.namd_r	128	582	209	**583**	**208**	585	208	128	577	211	**578**	**211**	580	210
510.parest_r	128	**1634**	**205**	1630	205	1636	205	128	**1633**	**205**	1627	206	1635	205
511.povray_r	128	872	343	**876**	**341**	876	341	128	759	394	**760**	**393**	760	393
519.lbm_r	128	652	207	653	207	**653**	**207**	128	609	222	**610**	**221**	611	221
521.wrf_r	128	762	376	767	374	**763**	**376**	128	768	374	771	372	**768**	**373**
526.blender_r	128	666	293	667	292	**667**	**292**	128	663	294	**661**	**295**	661	295
527.cam4_r	128	**741**	**302**	741	302	740	302	128	**725**	**309**	725	309	726	309
538.imagick_r	128	767	415	768	415	**767**	**415**	128	**768**	**414**	767	415	770	414
544.nab_r	128	**600**	**359**	601	359	599	359	128	**587**	**367**	589	366	587	367
549.fotonik3d_r	128	1801	277	**1800**	**277**	1795	278	128	1797	278	1801	277	**1800**	**277**
554.roms_r	128	1216	167	1232	165	**1225**	**166**	128	1193	170	**1197**	**170**	1199	170

SPECrate2017_fp_base = **301**

SPECrate2017_fp_peak = **308**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on
past performance using the historical hardware and/or
software described on this result page.

The system as described on this result page was formerly
generally available.  At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://www.spec.org/osg/policy.html

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
and software available as of the publication date.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
DCU Streamer Prefetcher set to Disable
DCU IP Prefetcher set to Disable
MONITORMWAIT set to Enable
Per Core P-state set to Disable
 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on SR860 Sat Dec 23 05:30:08 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
       4  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

(Continued on next page)

Platform Notes (Continued)

```
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                128
      On-line CPU(s) list:   0-127
      Thread(s) per core:    2
      Core(s) per socket:    16
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
      Stepping:              4
      CPU MHz:               2000.000
      BogoMIPS:              4000.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              22528K
      NUMA node0 CPU(s):     0-3,8-11,64-67,72-75
      NUMA node1 CPU(s):     4-7,12-15,68-71,76-79
      NUMA node2 CPU(s):     16-19,24-27,80-83,88-91
      NUMA node3 CPU(s):     20-23,28-31,84-87,92-95
      NUMA node4 CPU(s):     32-35,40-43,96-99,104-107
      NUMA node5 CPU(s):     36-39,44-47,100-103,108-111
      NUMA node6 CPU(s):     48-51,56-59,112-115,120-123
      NUMA node7 CPU(s):     52-55,60-63,116-119,124-127
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
      cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
      avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

 /proc/cpuinfo cache data
    cache size : 22528 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
  node 0 size: 97983 MB
  node 0 free: 95400 MB
  node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
  node 1 size: 98304 MB
  node 1 free: 95881 MB
  node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
  node 2 size: 98304 MB
  node 2 free: 95860 MB
  node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
  node 3 size: 98304 MB
  node 3 free: 95875 MB
  node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
  node 4 size: 98304 MB
  node 4 free: 95899 MB
  node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
  node 5 size: 98304 MB
  node 5 free: 95894 MB
  node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
  node 6 size: 98304 MB
  node 6 free: 95897 MB
  node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
  node 7 size: 98304 MB
  node 7 free: 95876 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  21  21  21  21  31  31
    1:  11  10  21  21  21  21  31  31
    2:  21  21  10  11  31  31  21  21
    3:  21  21  11  10  31  31  21  21
    4:  21  21  31  31  10  11  21  21
    5:  21  21  31  31  11  10  21  21
    6:  31  31  21  21  21  21  10  11
    7:  31  31  21  21  21  21  11  10

From /proc/meminfo
   MemTotal:       792256004 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
```

(Continued on next page)

Platform Notes (Continued)

```
       VERSION="7.4 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.4"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

 uname -a:
    Linux SR860 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57 EDT 2017 x86_64 x86_64
    x86_64 GNU/Linux

 run-level 3 Dec 22 17:40

 SPEC is set to: /home/cpu2017.1.0.2.ic18.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   686G  241G  446G  36% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[TEE117I-1.10]- 10/19/2017
   Memory:
    48x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

Peak Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

(Continued on next page)

Peak Optimization Flags (Continued)

549.fotonik3d_r: `Same as 503.bwaves_r`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs`
`-align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Peak Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml

Tested with SPEC CPU2017 v1.0.2 on 2017-12-22 16:30:07-0500.
Report generated on 2018-10-31 16:45:16 by CPU2017 PS formatter v6067.
Originally published on 2018-03-06.