SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 360

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

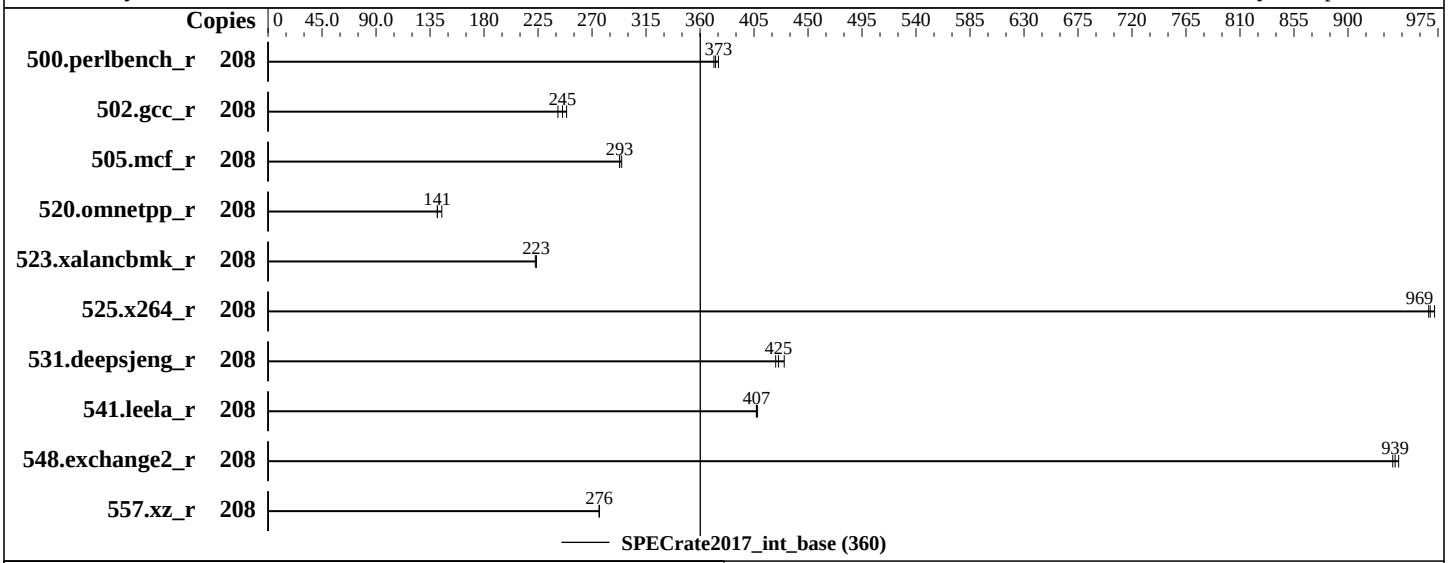

Hardware

CPU Name:	Intel Xeon Platinum 8170
Max MHz.:	3700
Nominal:	2100
Enabled:	104 cores, 4 chips, 2 threads/core
Orderable:	1, 2, 4 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Storage:	2 x 480 GB SATA SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	HPE BIOS Version U34 09/29/2017 released Oct-2017
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator library V5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL560 Gen10
(2.10 GHz, Intel Xeon Platinum 8170)

SPECrate2017_int_base = 360

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	891	372	882	375	**888**	**373**							
502.gcc_r	208	1219	242	**1200**	**245**	1184	249							
505.mcf_r	208	1141	295	**1147**	**293**	1147	293							
520.omnetpp_r	208	1885	145	1934	141	**1934**	**141**							
523.xalancbmk_r	208	982	224	986	223	**983**	**223**							
525.x264_r	208	**376**	**969**	375	972	377	967							
531.deepsjeng_r	208	554	430	**560**	**425**	563	423							
541.leela_r	208	844	408	**846**	**407**	846	407							
548.exchange2_r	208	581	937	578	942	**580**	**939**							
557.xz_r	208	**814**	**276**	814	276	814	276							

SPECrate2017_int_base = 360

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set wtih "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/SPECCPU2017/lib/ia32:/home/SPECCPU2017/lib/intel64:/home/SPECCPU2017/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/SPECCPU2017/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


This benchmark result is intended to provide perspective on
past performance using the historical hardware and/or
software described on this result page.

The system as described on this result page was formerly
generally available. At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://wwww.spec.org/osg/policy.htm.

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
and software available as of the publication date.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
built with RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Memory Patrol Scrubbing set to Disabled
  LLC Prefetch set to Enabled
  LLC Dead Line Allocation set to Disabled
  Stale A to S set to Enabled
  Workload Profile set to General Throughput Compute
   Minimum Processor Idle Power Core C-State set to C1E State
 Sysinfo program /home/SPECCPU2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-smfo Thu Nov  2 15:02:34 2017

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
       4  "physical id"s (chips)
```

(Continued on next page)

Platform Notes (Continued)

```
      208 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 26
      siblings  : 52
      physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
      physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
      physical 2: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
      physical 3: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                208
      On-line CPU(s) list:   0-207
      Thread(s) per core:    2
      Core(s) per socket:    26
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
      Stepping:              4
      CPU MHz:               2095.079
      BogoMIPS:              4190.15
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              36608K
      NUMA node0 CPU(s):     0-12,104-116
      NUMA node1 CPU(s):     13-25,117-129
      NUMA node2 CPU(s):     26-38,130-142
      NUMA node3 CPU(s):     39-51,143-155
      NUMA node4 CPU(s):     52-64,156-168
      NUMA node5 CPU(s):     65-77,169-181
      NUMA node6 CPU(s):     78-90,182-194
      NUMA node7 CPU(s):     91-103,195-207
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
```

(Continued on next page)

Platform Notes (Continued)

```
      erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 36608 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 104 105 106 107 108 109 110 111 112 113 114
   115 116
   node 0 size: 96346 MB
   node 0 free: 95753 MB
   node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 117 118 119 120 121 122 123 124 125
   126 127 128 129
   node 1 size: 96764 MB
   node 1 free: 96353 MB
   node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 130 131 132 133 134 135 136 137 138
   139 140 141 142
   node 2 size: 96764 MB
   node 2 free: 96498 MB
   node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 143 144 145 146 147 148 149 150 151
   152 153 154 155
   node 3 size: 32252 MB
   node 3 free: 31992 MB
   node 4 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 156 157 158 159 160 161 162 163 164
   165 166 167 168
   node 4 size: 96764 MB
   node 4 free: 96514 MB
   node 5 cpus: 65 66 67 68 69 70 71 72 73 74 75 76 77 169 170 171 172 173 174 175 176 177
   178 179 180 181
   node 5 size: 96764 MB
   node 5 free: 96514 MB
   node 6 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 182 183 184 185 186 187 188 189 190
   191 192 193 194
   node 6 size: 96764 MB
   node 6 free: 96508 MB
   node 7 cpus: 91 92 93 94 95 96 97 98 99 100 101 102 103 195 196 197 198 199 200 201 202
   203 204 205 206 207
   node 7 size: 96761 MB
   node 7 free: 96509 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  21  31  31  31  31  31  31
     1:  21  10  31  31  31  31  31  31
     2:  31  31  10  21  31  31  31  31
     3:  31  31  21  10  31  31  31  31
```

(Continued on next page)

Platform Notes (Continued)

```
     4:  31  31  31  31  10  21  31  31
     5:  31  31  31  31  21  10  31  31
     6:  31  31  31  31  31  31  10  21
     7:  31  31  31  31  31  31  21  10

  From /proc/meminfo
     MemTotal:       726202768 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP2

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-smfo 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 2 15:00

  SPEC is set to: /home/SPECCPU2017
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   852G  161G  692G  19% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS HPE U34 09/29/2017
    Memory:
     48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
     557.xz_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-02 16:02:34-0400.
Report generated on 2018-10-31 18:06:08 by CPU2017 PS formatter v6067.
Originally published on 2018-06-13.