SPEC® CPU2017 Floating Point Rate Result

Dell Inc.

PowerEdge R7425 (AMD EPYC 7551, 2.00 GHz)

SPECrate2017_fp_base = 252

SPECrate2017_fp_peak = Not Run

CPU2017 License:	55	**Test Date:**	Mar-2018
Test Sponsor:	Dell Inc.	**Hardware Availability:**	Feb-2018
Tested by:	Dell Inc.	**Software Availability:**	Sep-2017

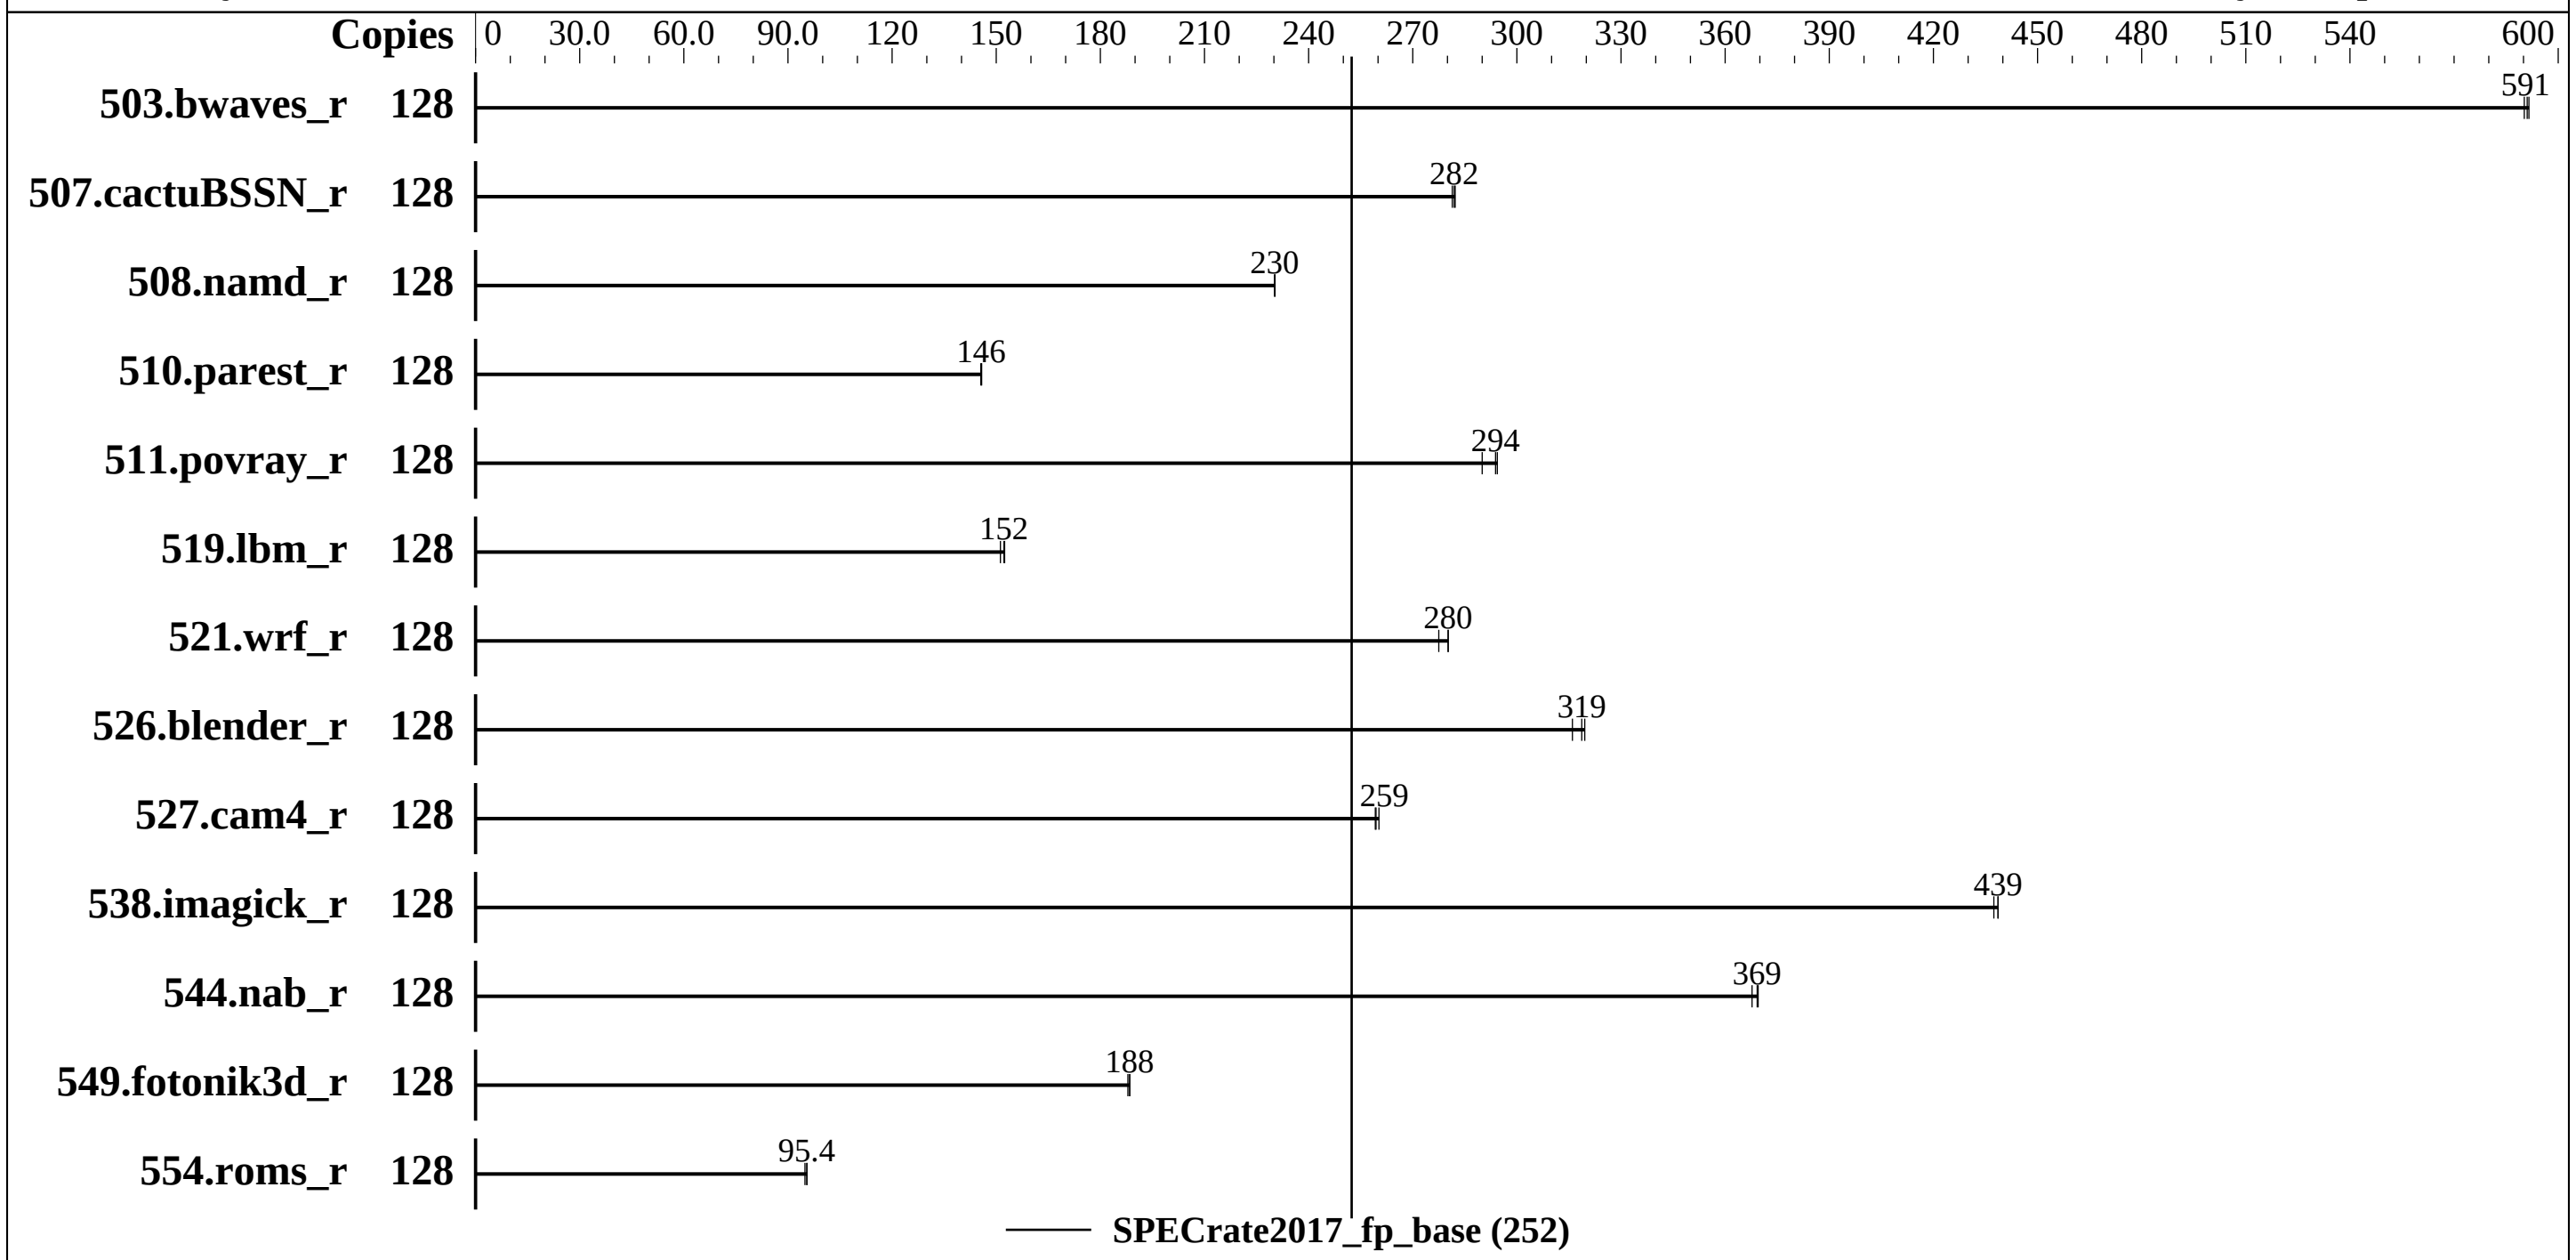

Hardware

CPU Name:	AMD EPYC 7551
Max MHz.:	3000
Nominal:	2000
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other:	None
Memory:	1 TB (16 x 64 GB 4DRx4 PC4-2666V-L, running at 2666)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) kernel 4.4.114-94.11-default
Compiler:	C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	Version 1.0.9 released Jan-2018
File System:	xfs
System State:	Run Level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator library, version 4.5.0

SPEC CPU2017 Floating Point Rate Result

Dell Inc.

PowerEdge R7425 (AMD EPYC 7551, 2.00 GHz)

SPECrate2017_fp_base = 252

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2018
Hardware Availability: Feb-2018
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	2175	590	**2172**	**591**	2170	592							
507.cactuBSSN_r	128	574	282	**575**	**282**	576	281							
508.namd_r	128	528	230	**528**	**230**	528	230							
510.parest_r	128	2300	146	**2298**	**146**	2297	146							
511.povray_r	128	1031	290	**1017**	**294**	1015	294							
519.lbm_r	128	892	151	885	152	**886**	**152**							
521.wrf_r	128	**1023**	**280**	1023	280	1033	277							
526.blender_r	128	610	320	**612**	**319**	617	316							
527.cam4_r	128	**863**	**259**	860	260	864	259							
538.imagick_r	128	728	437	726	439	**726**	**439**							
544.nab_r	128	586	368	**583**	**369**	583	370							
549.fotonik3d_r	128	2654	188	**2647**	**188**	2647	188							
554.roms_r	128	2143	94.9	2130	95.5	**2131**	**95.4**							

SPECrate2017_fp_base = 252

SPECrate2017_fp_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.2/amd1704-rate-libs-revC/64;/home/cpu2017-1.0.2/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
The AOCC Gold Linker plugin was installed and used for the link stage.
The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran.
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

 NA:  The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 Sysinfo program /home/cpu2017-1.0.2/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-o8ns Tue Mar  6 19:57:42 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7551 32-Core Processor
       2  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 32
       siblings  : 64
       physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
```

(Continued on next page)

Platform Notes (Continued)

```
        29 30 31
       physical 1: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
        29 30 31

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                128
      On-line CPU(s) list:   0-127
      Thread(s) per core:    2
      Core(s) per socket:    32
      Socket(s):             2
      NUMA node(s):          8
      Vendor ID:             AuthenticAMD
      CPU family:            23
      Model:                 1
      Model name:            AMD EPYC 7551 32-Core Processor
      Stepping:              2
      CPU MHz:               1996.217
      BogoMIPS:              3992.43
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             64K
      L2 cache:              512K
      L3 cache:              8192K
      NUMA node0 CPU(s):     0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
      NUMA node1 CPU(s):     2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
      NUMA node2 CPU(s):     4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
      NUMA node3 CPU(s):     6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
      NUMA node4 CPU(s):     1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
      NUMA node5 CPU(s):     3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
      NUMA node6 CPU(s):     5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
      NUMA node7 CPU(s):     7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
      flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
      smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
      ibpb overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120
  node 0 size: 128623 MB
  node 0 free: 128376 MB
  node 1 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122
  node 1 size: 129021 MB
  node 1 free: 128847 MB
  node 2 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124
  node 2 size: 129021 MB
  node 2 free: 128846 MB
  node 3 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126
  node 3 size: 129021 MB
  node 3 free: 128835 MB
  node 4 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121
  node 4 size: 129021 MB
  node 4 free: 128844 MB
  node 5 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123
  node 5 size: 129021 MB
  node 5 free: 128843 MB
  node 6 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125
  node 6 size: 129021 MB
  node 6 free: 128851 MB
  node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
  node 7 size: 129019 MB
  node 7 free: 128836 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  16  16  16  28  28  22  28
    1:  16  10  16  16  28  28  28  22
    2:  16  16  10  16  22  28  28  28
    3:  16  16  16  10  28  22  28  28
    4:  28  28  22  28  10  16  16  16
    5:  28  28  28  22  16  10  16  16
    6:  22  28  28  28  16  16  10  16
    7:  28  22  28  28  16  16  16  10

From /proc/meminfo
   MemTotal:       1056533368 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP3
```

(Continued on next page)

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-o8ns 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 6 13:32

SPEC is set to: /home/cpu2017-1.0.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   844G   11G  834G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Dell Inc. 1.0.9 01/05/2018
  Memory:
   16x 802C8632802C 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666
   16x Not Specified Not Specified

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`clang gfortran`

Benchmarks using both Fortran and C:
`clang gfortran`

Benchmarks using both C and C++:
`clang++ clang`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc

Fortran benchmarks:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm

Benchmarks using both Fortran and C:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -O3(gfortran) -mavx -madx
-funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm

Benchmarks using both C and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc

Benchmarks using Fortran, C, and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -finline-aggressive -O3(gfortran)
-mavx -madx -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html
http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml
http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-03-06 20:57:41-0500.
Report generated on 2019-02-21 13:54:36 by CPU2017 PS formatter v6067.
Originally published on 2018-04-03.