SPEC® CPU2017 Floating Point Rate Result

Supermicro

SuperServer 6029U-E1CRTP (X11DPU , Intel Xeon Gold 5115)

SPECrate2017_fp_base = 110

SPECrate2017_fp_peak = 112

CPU2017 License:	001176	**Test Date:**	Apr-2018
Test Sponsor:	Supermicro	**Hardware Availability:**	Jul-2017
Tested by:	Supermicro	**Software Availability:**	Feb-2018

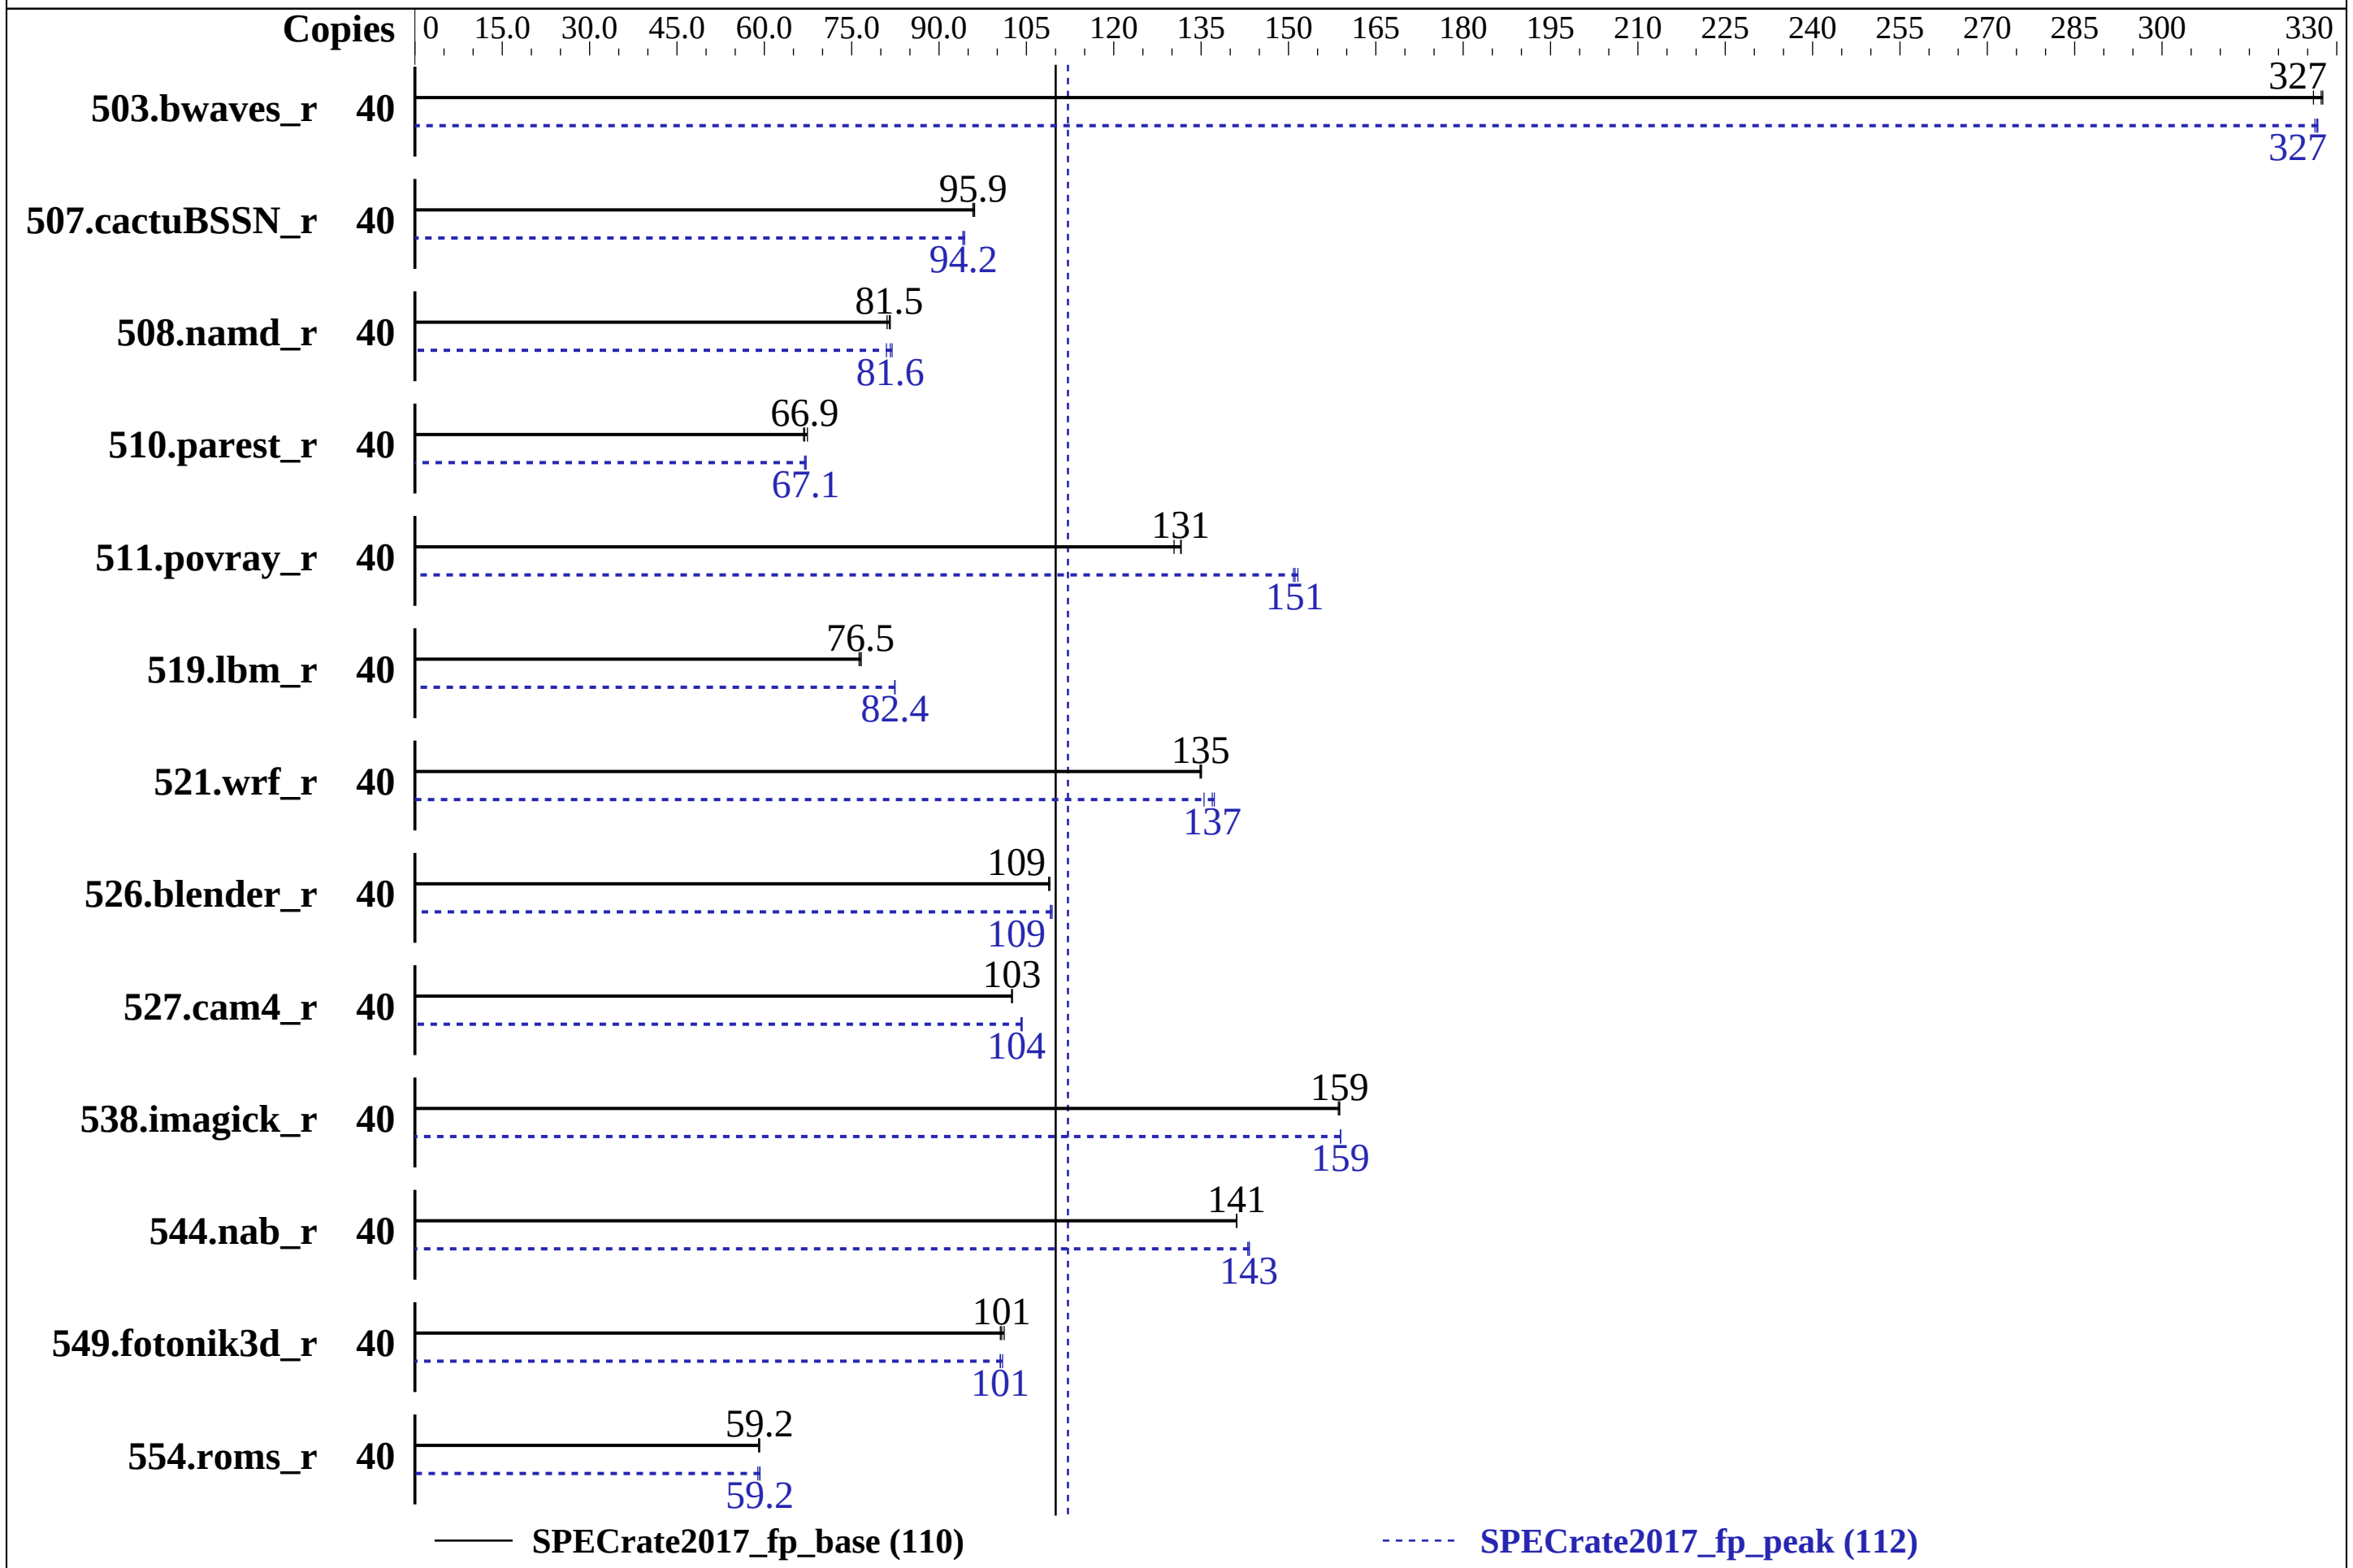

Hardware

CPU Name:	Intel Xeon Gold 5115
Max MHz.:	3200
Nominal:	2400
Enabled:	20 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	13.75 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage:	1 x 200 GB SATAIII SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) Kernel 4.4.114-94.11-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Supermicro BIOS version 2.0b released Feb-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Rate Result

Supermicro

SuperServer 6029U-E1CRTP (X11DPU , Intel Xeon Gold 5115)

SPECrate2017_fp_base = 110

SPECrate2017_fp_peak = 112

CPU2017 License:	001176	**Test Date:**	Apr-2018
Test Sponsor:	Supermicro	**Hardware Availability:**	Jul-2017
Tested by:	Supermicro	**Software Availability:**	Feb-2018

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
503.bwaves_r	40	1230	326	**1225**	**327**	1224	328	40	**1228**	**327**	1228	327	1229	326
507.cactuBSSN_r	40	**528**	**95.9**	529	95.8	527	96.1	40	**538**	**94.2**	538	94.1	536	94.4
508.namd_r	40	**466**	**81.5**	466	81.6	469	81.1	40	469	81.0	**466**	**81.6**	464	81.9
510.parest_r	40	1552	67.4	**1563**	**66.9**	1568	66.7	40	1558	67.1	1564	66.9	**1559**	**67.1**
511.povray_r	40	**710**	**131**	717	130	710	132	40	**618**	**151**	616	152	619	151
519.lbm_r	40	553	76.3	**551**	**76.5**	550	76.6	40	512	82.4	**511**	**82.4**	511	82.4
521.wrf_r	40	665	135	663	135	**664**	**135**	40	653	137	**654**	**137**	661	136
526.blender_r	40	560	109	559	109	**560**	**109**	40	557	109	**558**	**109**	558	109
527.cam4_r	40	683	102	682	103	**683**	**103**	40	**671**	**104**	672	104	671	104
538.imagick_r	40	**627**	**159**	627	159	627	159	40	626	159	**626**	**159**	626	159
544.nab_r	40	**477**	**141**	477	141	477	141	40	471	143	**470**	**143**	470	143
549.fotonik3d_r	40	**1547**	**101**	1541	101	1551	101	40	**1550**	**101**	1545	101	1551	101
554.roms_r	40	1077	59.0	**1074**	**59.2**	1074	59.2	40	1073	59.3	1079	58.9	**1073**	**59.2**

SPECrate2017_fp_base = 110

SPECrate2017_fp_peak = 112

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

```
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
LLC prefetch = Enable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
Hardware P-state = Out of Band Mode
XPT Prefetch = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-k7zv Thu Apr 19 11:49:01 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz
      2  "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                40
     On-line CPU(s) list:   0-39
     Thread(s) per core:    2
```

(Continued on next page)

Platform Notes (Continued)

```
      Core(s) per socket:    10
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz
      Stepping:              4
      CPU MHz:               1000.000
      CPU max MHz:           2401.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4799.96
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              14080K
      NUMA node0 CPU(s):     0-9,20-29
      NUMA node1 CPU(s):     10-19,30-39
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

 /proc/cpuinfo cache data
    cache size : 14080 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
   node 0 size: 192093 MB
   node 0 free: 191699 MB
   node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
   node 1 size: 193516 MB
   node 1 free: 193060 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/meminfo
   MemTotal:       394864280 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-k7zv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 19 11:47

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   145G   13G  132G   9% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS American Megatrends Inc. 2.0b 02/24/2018
  Memory:
   12x NO DIMM NO DIMM
   12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

503.bwaves_r: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

549.fotonik3d_r: `Same as 503.bwaves_r`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Peak Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-04-18 23:49:00-0400.
Report generated on 2018-10-31 17:40:55 by CPU2017 PS formatter v6067.
Originally published on 2018-05-23.