SPEC® CPU2017 Integer Rate Result

Huawei

Huawei XH321 V5 (Intel Xeon Gold 6128)

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = 89.3

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

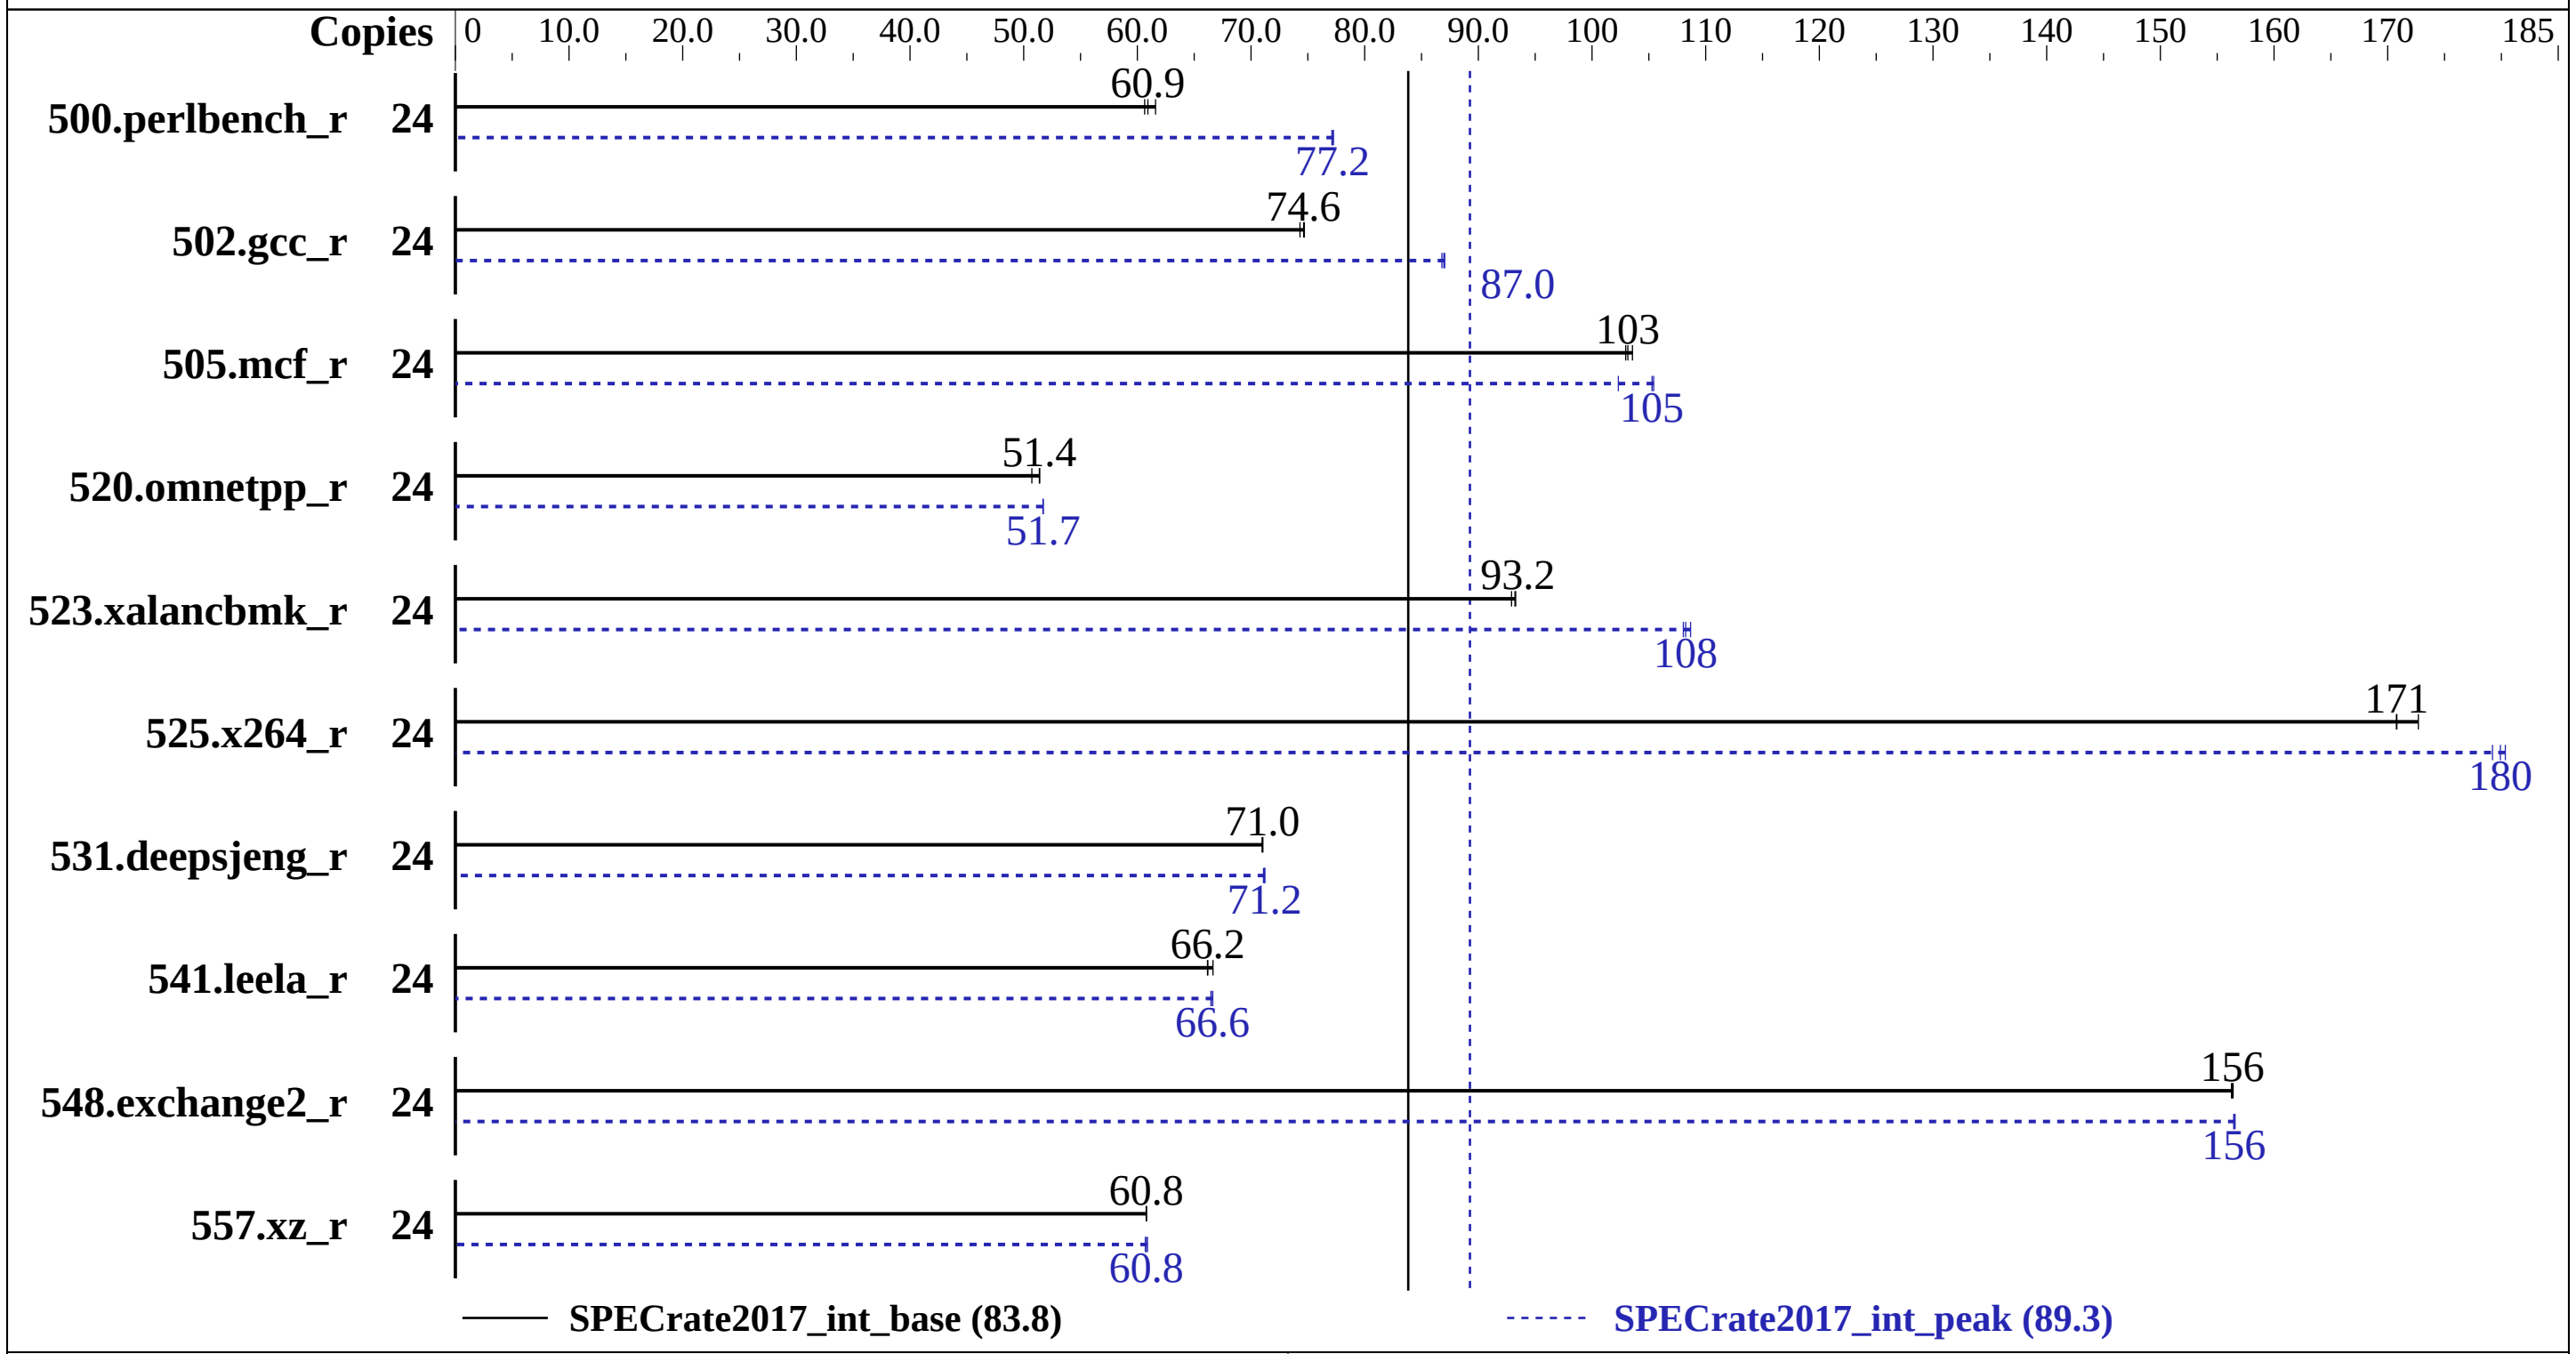

Hardware

CPU Name:	Intel Xeon Gold 6128
Max MHz.:	3700
Nominal:	3400
Enabled:	12 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	19.25 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 1200 GB SAS, 10000 RPM
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.3 (Maipo) 3.10.0-693.11.6.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 0.59 Released Feb-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library V5.0.1;

Huawei

Huawei XH321 V5 (Intel Xeon Gold 6128)

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = 89.3

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
500.perlbench_r	24	620	61.6	630	60.6	**627**	**60.9**	24	495	77.3	**495**	**77.2**	495	77.1
502.gcc_r	24	457	74.3	**455**	**74.6**	455	74.7	24	**391**	**87.0**	392	86.8	390	87.0
505.mcf_r	24	375	104	**376**	**103**	377	103	24	379	102	**368**	**105**	368	105
520.omnetpp_r	24	621	50.7	613	51.4	**613**	**51.4**	24	**609**	**51.7**	609	51.7	609	51.7
523.xalancbmk_r	24	**272**	**93.2**	272	93.3	273	92.9	24	235	108	**234**	**108**	233	109
525.x264_r	24	246	171	243	173	**246**	**171**	24	**234**	**180**	234	179	233	180
531.deepsjeng_r	24	388	71.0	387	71.0	**387**	**71.0**	24	**386**	**71.2**	387	71.1	386	71.2
541.leela_r	24	**600**	**66.2**	596	66.7	601	66.2	24	**597**	**66.6**	598	66.5	596	66.6
548.exchange2_r	24	402	156	**402**	**156**	402	156	24	402	156	**402**	**156**	402	157
557.xz_r	24	**426**	**60.8**	426	60.8	426	60.8	24	427	60.7	426	60.9	**426**	**60.8**

SPECrate2017_int_base = 83.8

SPECrate2017_int_peak = 89.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 jemalloc: configured and built at default for
 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4,
 and the system compiler gcc 4.8.5;
 jemalloc: sources avilable from jemalloc.net or
 https://github.com/jemalloc/jemalloc/releases
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Power Policy Set to Performance
SNC Set to Enabled
IMC Interleaving Set to 1-way Interleave
XPT Prefetch Set to Enabled
ADDDC Sparing Set to Disabled
Sysinfo program /spec/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Fri May  4 11:26:39 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz
      2  "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 6 9 10 11 13
      physical 1: cores 0 6 9 10 11 13

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                24
     On-line CPU(s) list:   0-23
     Thread(s) per core:    2
     Core(s) per socket:    6
     Socket(s):             2
     NUMA node(s):          4
     Vendor ID:             GenuineIntel
     CPU family:            6
```

(Continued on next page)

Platform Notes (Continued)

```
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6128 CPU @ 3.40GHz
      Stepping:              4
      CPU MHz:               3400.000
      BogoMIPS:              6806.04
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              19712K
      NUMA node0 CPU(s):     0,2,3,12,14,15
      NUMA node1 CPU(s):     1,4,5,13,16,17
      NUMA node2 CPU(s):     6,8,9,18,20,21
      NUMA node3 CPU(s):     7,10,11,19,22,23

 /proc/cpuinfo cache data
    cache size : 19712 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 2 3 12 14 15
   node 0 size: 96437 MB
   node 0 free: 93895 MB
   node 1 cpus: 1 4 5 13 16 17
   node 1 size: 98304 MB
   node 1 free: 95808 MB
   node 2 cpus: 6 8 9 18 20 21
   node 2 size: 98304 MB
   node 2 free: 96046 MB
   node 3 cpus: 7 10 11 19 22 23
   node 3 size: 98304 MB
   node 3 free: 96035 MB
   node distances:
   node   0   1   2   3
     0:  10  11  21  21
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       394174484 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
```

(Continued on next page)

Platform Notes (Continued)

```
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.3 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.3"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
   2017 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 4 11:19

SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda8      xfs   325G   81G  245G  25% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS INSYDE Corp. 0.59 02/24/2018
  Memory:
   4x NO DIMM NO DIMM
   12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Peak Compiler Invocation

C benchmarks:
`icc`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-D_FILE_OFFSET_BITS=64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-strict-overflow -L/usr/local/je5.0.1-64/lib -ljemalloc`

502.gcc_r: `-L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32 -Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

505.mcf_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

525.x264_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc`

(Continued on next page)

Peak Optimization Flags (Continued)

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):
-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):
-m64

523.xalancbmk_r: -m32

Fortran benchmarks:
-m64

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-05-04 11:26:38-0400.
Report generated on 2018-10-31 18:06:42 by CPU2017 PS formatter v6067.
Originally published on 2018-06-13.