SPEC® CPU2017 Integer Speed Result

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Platinum 8180,2.50GHz)

SPECspeed2017_int_base = 9.34

SPECspeed2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.
Test Date: May-2018
Hardware Availability: Sep-2017
Software Availability: Mar-2018

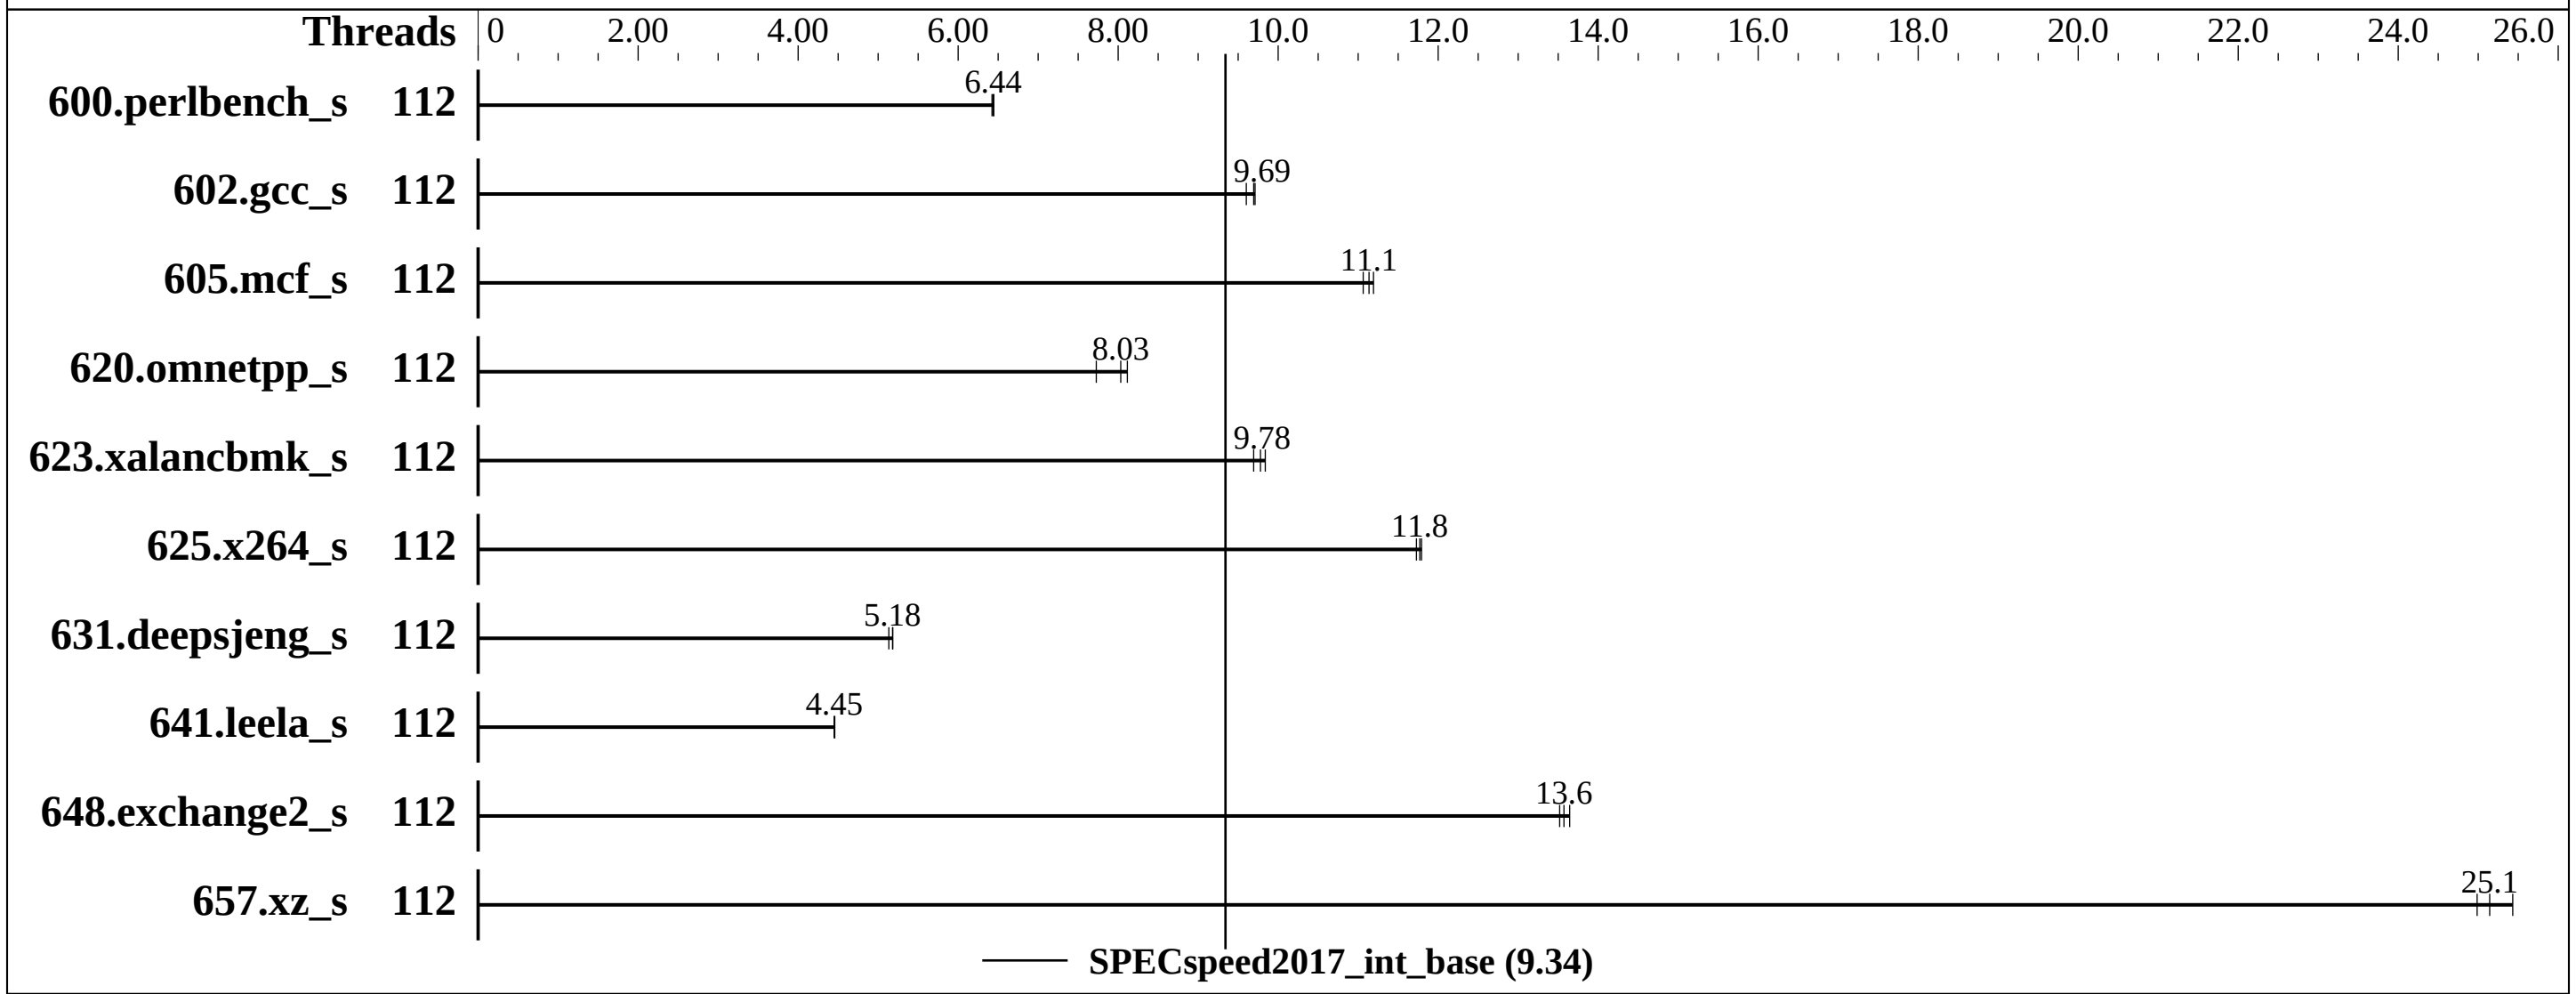

Hardware

CPU Name: Intel Xeon Platinum 8180
Max MHz.: 3800
Nominal: 2500
Enabled: 112 cores, 4 chips
Orderable: 1,2,3,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Storage: 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 4.4.126-48-default
Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.20180210 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: INSYDE Corp. BIOS Version 1.00.16 Released May-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator v5.0.1

Results Table

	Base							Peak						
Benchmark	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	276	6.42	**276**	**6.44**	275	6.45							
602.gcc_s	112	**411**	**9.69**	415	9.60	410	9.71							
605.mcf_s	112	**424**	**11.1**	422	11.2	427	11.1							
620.omnetpp_s	112	211	7.73	**203**	**8.03**	201	8.12							
623.xalancbmk_s	112	144	9.84	146	9.69	**145**	**9.78**							
625.x264_s	112	**150**	**11.8**	150	11.8	150	11.7							
631.deepsjeng_s	112	**277**	**5.18**	279	5.13	277	5.18							
641.leela_s	112	**383**	**4.45**	383	4.45	383	4.46							
648.exchange2_s	112	**217**	**13.6**	215	13.6	217	13.5							
657.xz_s	112	247	25.0	243	25.4	**246**	**25.1**							

SPECspeed2017_int_base = 9.34

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/ia32:/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-32:/home/speccpu/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
Set SNC to disabled
Set Hyper-Threading to disabled
Set C1E to disabled
Set Power Supply Mode to Performance
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-bc59 Fri May 25 18:11:14 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      4  "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                112
     On-line CPU(s) list:   0-111
     Thread(s) per core:    1
     Core(s) per socket:    28
     Socket(s):             4
     NUMA node(s):          4
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
     Stepping:              4
     CPU MHz:               3061.135
     CPU max MHz:           3800.0000
```

(Continued on next page)

Platform Notes (Continued)

```
     CPU min MHz:            1000.0000
     BogoMIPS:               4988.54
     Virtualization:         VT-x
     L1d cache:              32K
     L1i cache:              32K
     L2 cache:               1024K
     L3 cache:               39424K
     NUMA node0 CPU(s):      0-27
     NUMA node1 CPU(s):      28-55
     NUMA node2 CPU(s):      56-83
     NUMA node3 CPU(s):      84-111
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
     aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
     fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
     xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
     dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
     retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
     avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
     clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku
     ospke

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
   node 0 size: 191742 MB
   node 0 free: 191102 MB
   node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
   53 54 55
   node 1 size: 193523 MB
   node 1 free: 192949 MB
   node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
   81 82 83
   node 2 size: 193523 MB
   node 2 free: 192968 MB
   node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
   106 107 108 109 110 111
   node 3 size: 193360 MB
   node 3 free: 192687 MB
   node distances:
   node   0   1   2   3
     0:  10  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  21  10  21  21
     2:  21  21  10  21
     3:  21  21  21  10

  From /proc/meminfo
     MemTotal:       790681636 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP3

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 3
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP3"
        VERSION_ID="12.3"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp3"

  uname -a:
     Linux linux-bc59 4.4.126-48-default #1 SMP Sat Apr 7 05:22:50 UTC 2018 (f24992c)
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 May 25 10:36

  SPEC is set to: /home/speccpu
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda4      xfs   852G   33G  820G   4% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS INSYDE Corp. 1.00.16 05/12/2018
    Memory:
     48x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
      657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.2-SKL-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.2-SKL-RevD.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-25 06:11:13-0400.
Report generated on 2018-10-31 17:55:06 by CPU2017 PS formatter v6067.
Originally published on 2018-06-12.