SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8153, 2.00 GHz)

SPECrate®2017_fp_base = 325

SPECrate®2017_fp_peak = 327

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

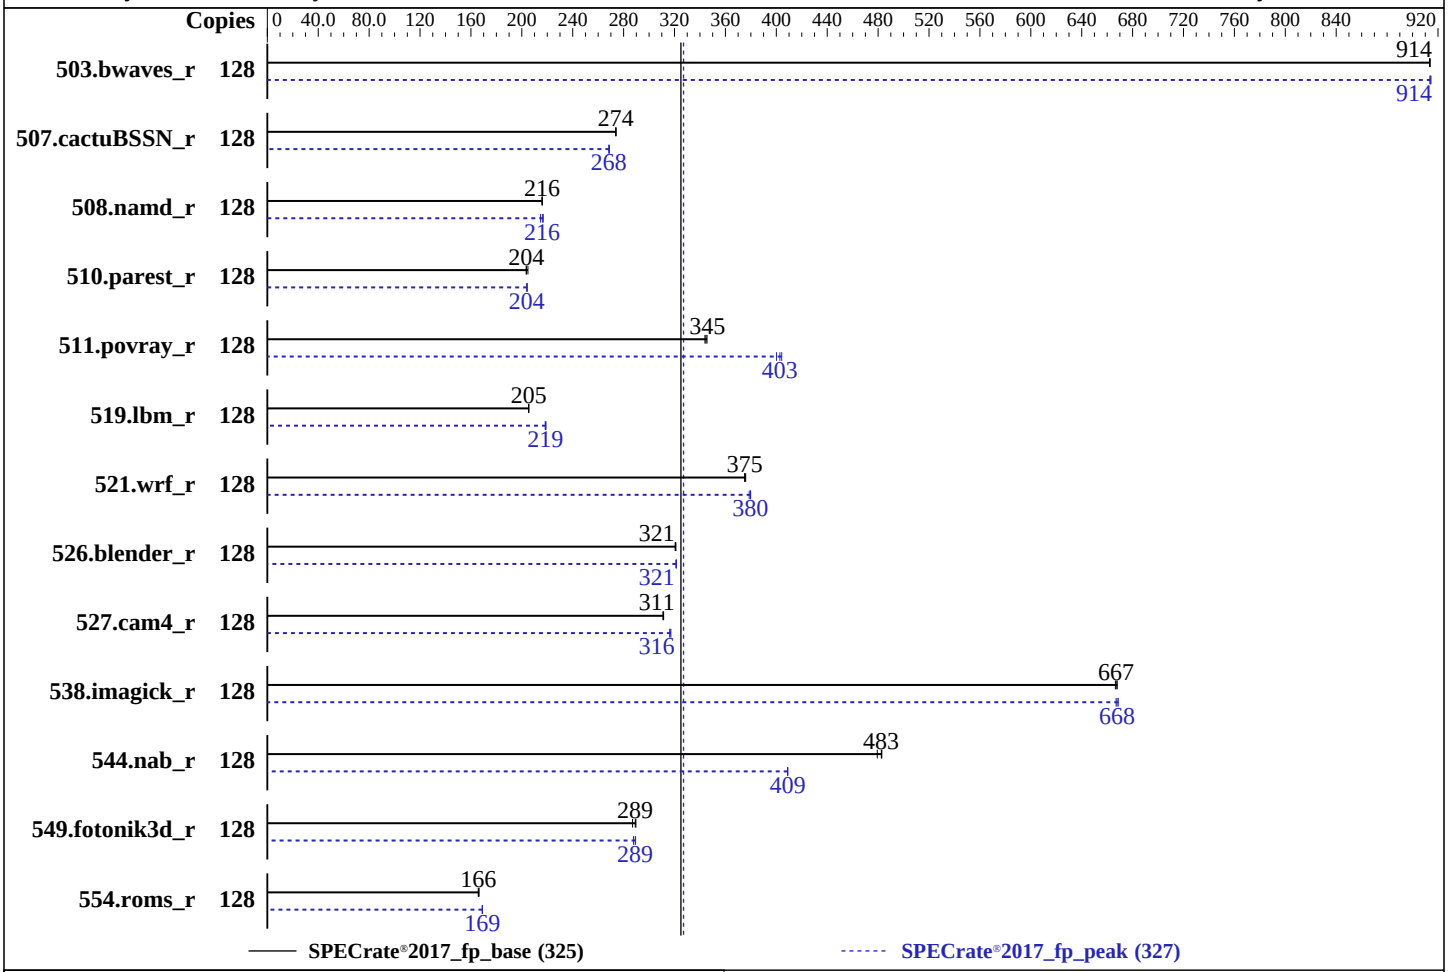

Hardware

CPU Name:	Intel Xeon Platinum 8153
Max MHz:	2800
Nominal:	2000
Enabled:	64 cores, 4 chips, 2 threads/core
Orderable:	2,4 Chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 600 GB SAS HDD, 10K RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.103-92.56-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 3.2.3c released Mar-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	--

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Platinum 8153, 2.00 GHz)

SPECrate®2017_fp_base = 325

SPECrate®2017_fp_peak = 327

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: May-2018
Hardware Availability: Aug-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1405	914	1405	913	**1405**	**914**	128	1404	914	**1404**	**914**	1405	914
507.cactuBSSN_r	128	**591**	**274**	592	274	591	274	128	604	268	**604**	**268**	603	269
508.namd_r	128	**563**	**216**	563	216	563	216	128	561	217	**563**	**216**	567	215
510.parest_r	128	1635	205	1646	203	**1644**	**204**	128	1640	204	**1641**	**204**	1642	204
511.povray_r	128	869	344	865	346	**867**	**345**	128	**742**	**403**	739	404	747	400
519.lbm_r	128	657	205	657	205	**657**	**205**	128	618	218	**617**	**219**	616	219
521.wrf_r	128	763	376	764	375	**764**	**375**	128	757	379	**755**	**380**	755	380
526.blender_r	128	**608**	**321**	608	320	607	321	128	**607**	**321**	606	321	607	321
527.cam4_r	128	**719**	**311**	719	311	720	311	128	706	317	708	316	**708**	**316**
538.imagick_r	128	**477**	**667**	477	668	478	666	128	476	669	**477**	**668**	477	667
544.nab_r	128	449	479	**446**	**483**	446	483	128	527	409	**527**	**409**	527	409
549.fotonik3d_r	128	1738	287	1722	290	**1725**	**289**	128	1724	289	**1726**	**289**	1734	288
554.roms_r	128	**1225**	**166**	1222	166	1227	166	128	**1204**	**169**	1204	169	1203	169

SPECrate®2017_fp_base = 325

SPECrate®2017_fp_peak = 327

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-xy4f Fri May 25 20:37:31 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
       4  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                128
      On-line CPU(s) list:   0-127
      Thread(s) per core:    2
      Core(s) per socket:    16
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
      Stepping:              4
      CPU MHz:               1000.016
      CPU max MHz:           2800.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              3999.98
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              22528K
      NUMA node0 CPU(s):     0-3,8-11,64-67,72-75
      NUMA node1 CPU(s):     4-7,12-15,68-71,76-79
      NUMA node2 CPU(s):     16-19,24-27,80-83,88-91
      NUMA node3 CPU(s):     20-23,28-31,84-87,92-95
      NUMA node4 CPU(s):     32-35,40-43,96-99,104-107
      NUMA node5 CPU(s):     36-39,44-47,100-103,108-111
      NUMA node6 CPU(s):     48-51,56-59,112-115,120-123
      NUMA node7 CPU(s):     52-55,60-63,116-119,124-127
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt spec_ctrl kaiser tpr_shadow
      vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
      rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
      avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 22528 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
    node 0 size: 95327 MB
    node 0 free: 95119 MB
    node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
    node 1 size: 96760 MB
    node 1 free: 96626 MB
    node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
    node 2 size: 96760 MB
    node 2 free: 96605 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
   node 3 size: 96760 MB
   node 3 free: 96624 MB
   node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
   node 4 size: 96760 MB
   node 4 free: 96614 MB
   node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
   node 5 size: 96760 MB
   node 5 free: 96647 MB
   node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
   node 6 size: 96760 MB
   node 6 free: 96646 MB
   node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
   node 7 size: 96758 MB
   node 7 free: 96604 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  21  21  21  21
     1:  11  10  21  21  21  21  21  21
     2:  21  21  10  11  21  21  21  21
     3:  21  21  11  10  21  21  21  21
     4:  21  21  21  21  10  11  21  21
     5:  21  21  21  21  11  10  21  21
     6:  21  21  21  21  21  21  10  11
     7:  21  21  21  21  21  21  11  10

 From /proc/meminfo
    MemTotal:       791191936 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"
```


(Continued on next page)

Platform Notes (Continued)

```
 uname -a:
    Linux linux-xy4f 4.4.103-92.56-default #1 SMP Wed Dec 27 16:24:31 UTC 2017 (2fd2155)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Dec 31 19:26

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda1      xfs   224G   68G  156G  31% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Cisco Systems, Inc. B480M5.3.2.3c.0.0307181316 03/07/2018
   Memory:
    48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

538.imagick_r: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r: Same as 519.lbm_r

C++ benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2018-06-13.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2018-06-13.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.2 on 2018-05-25 20:37:30-0400.
Report generated on 2019-12-13 17:53:57 by CPU2017 PS formatter v6255.
Originally published on 2018-06-12.