# SPEC® CPU2017 Floating Point Rate Result



## Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7351)

SPECrate2017_fp_base = 189

SPECrate2017_fp_peak = 187

| | | | |
|---|---|---|---|
| **CPU2017 License:** | 001176 | **Test Date:** | Mar-2018 |
| **Test Sponsor:** | Supermicro | **Hardware Availability:** | Jun-2017 |
| **Tested by:** | Supermicro | **Software Availability:** | Feb-2018 |

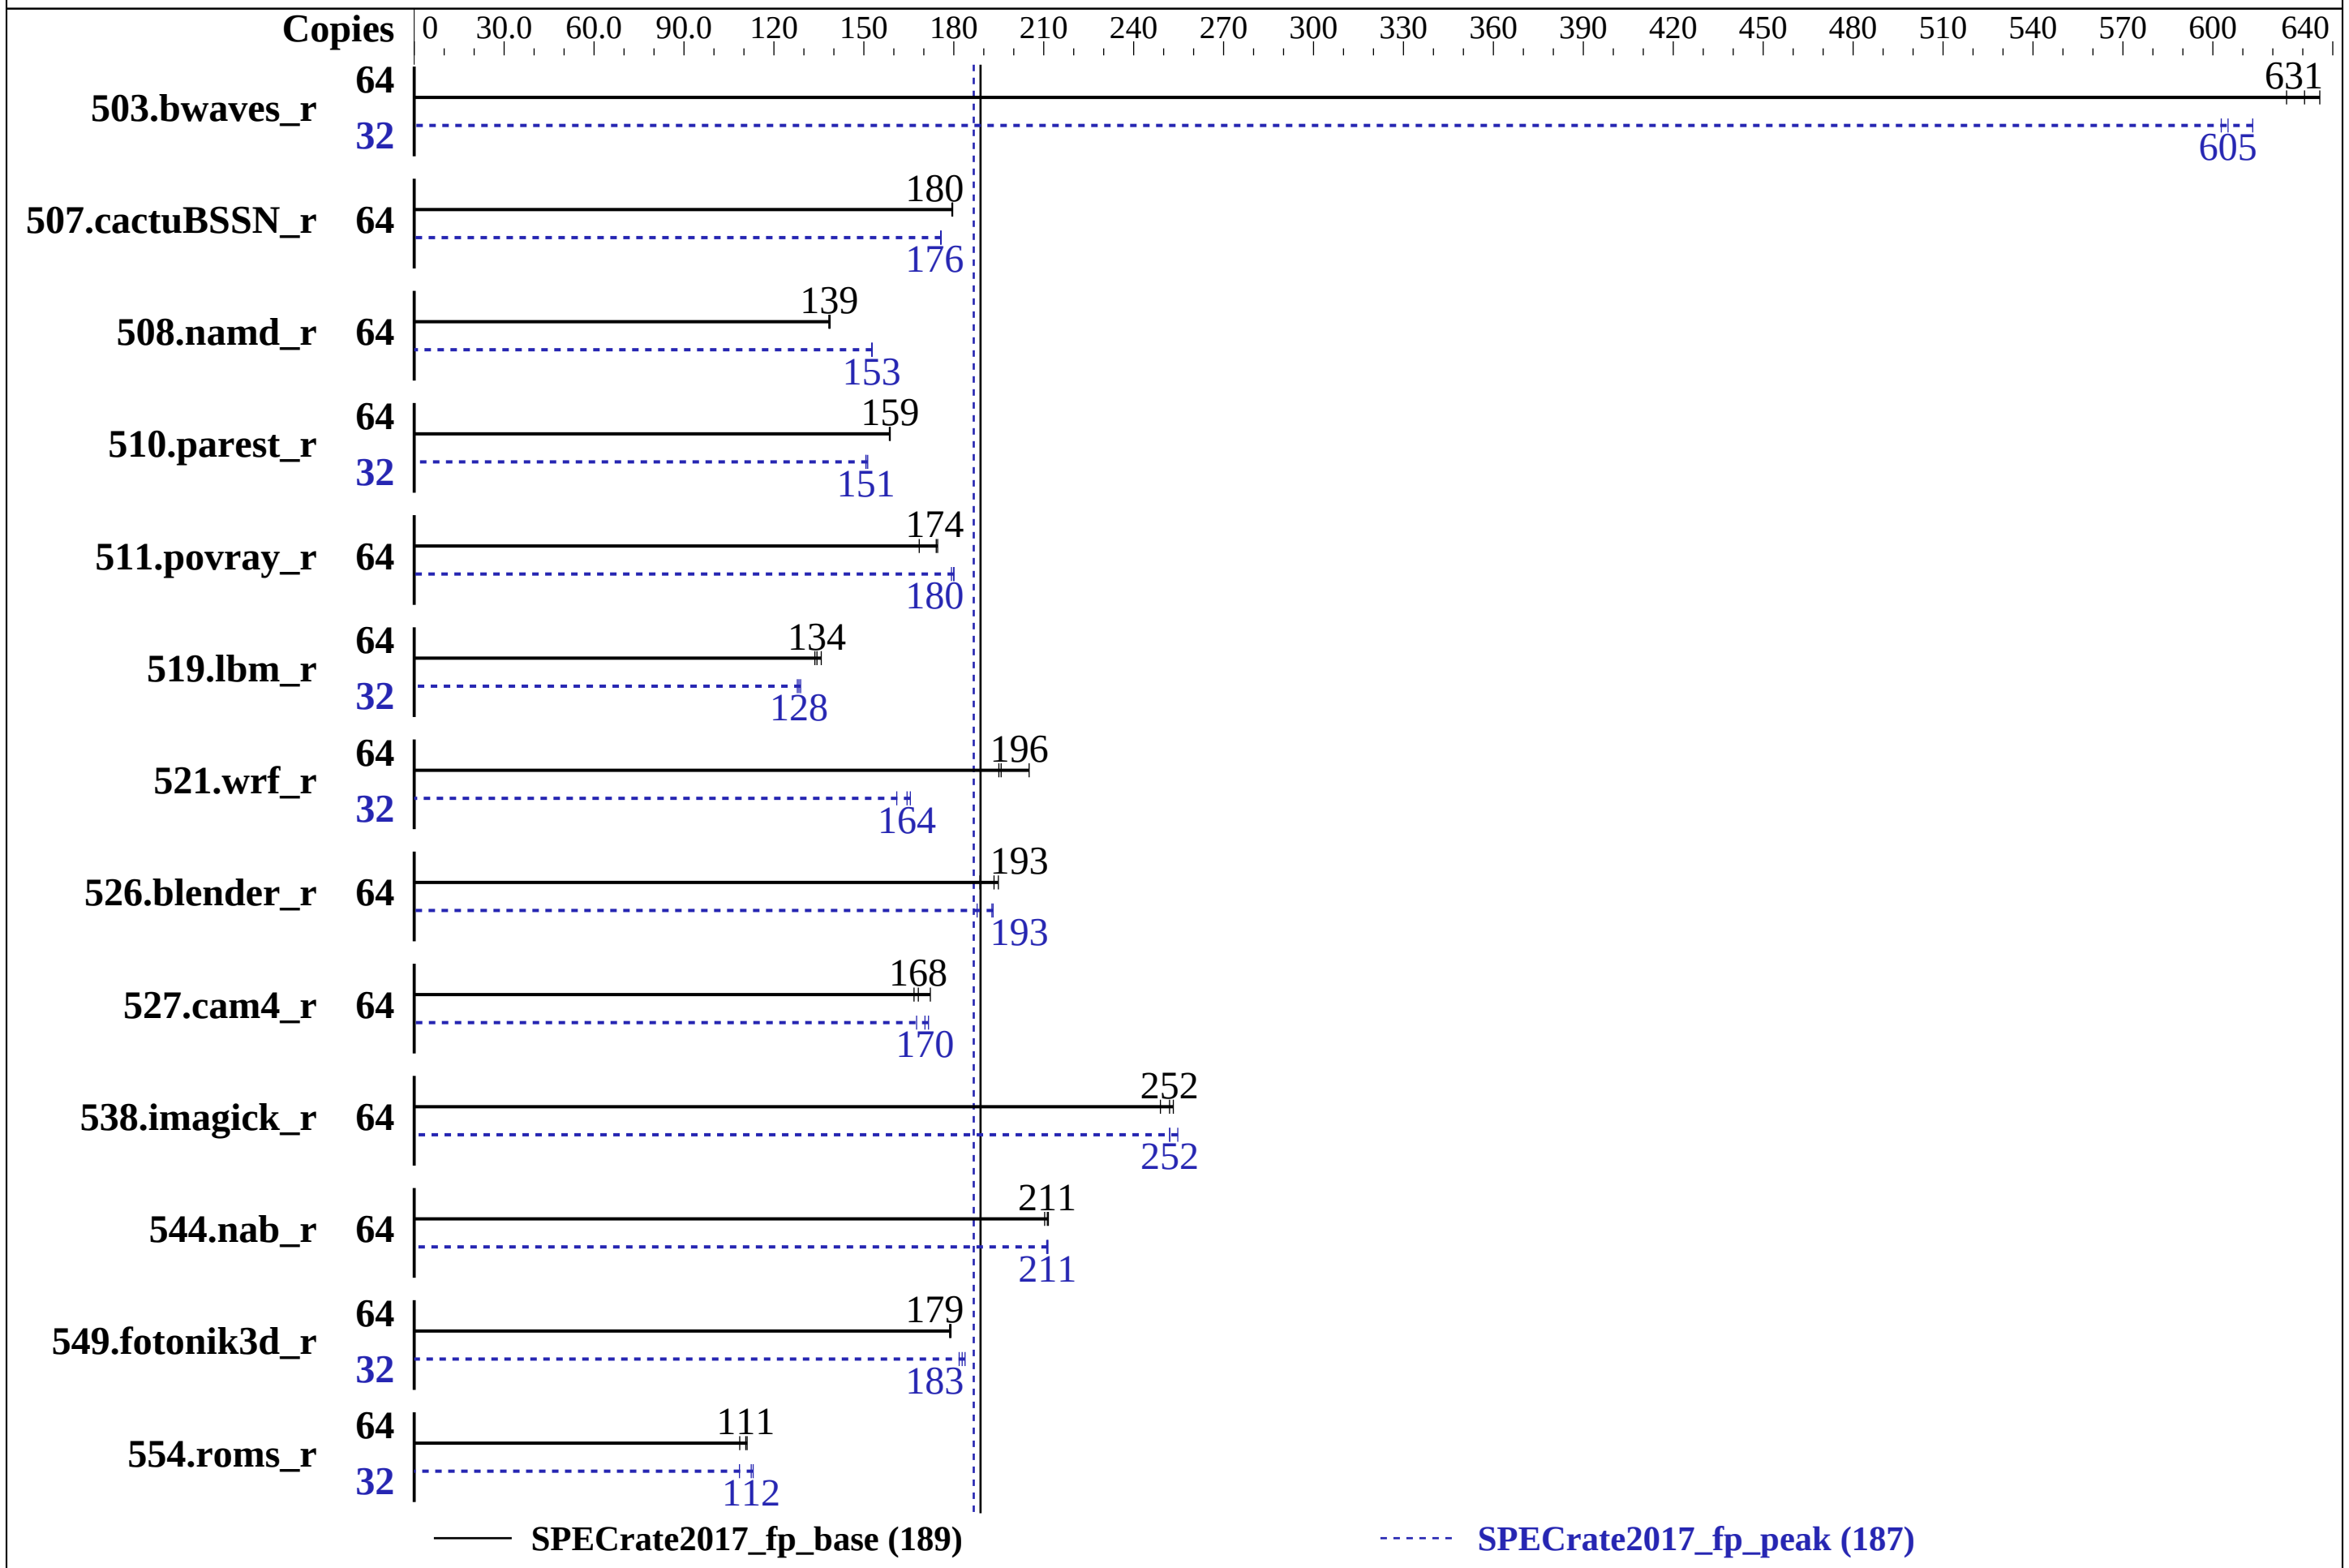


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7351 |
| Max MHz.: | 2900 |
| Nominal: | 2400 |
| Enabled: | 32 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 64 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 64 MB I+D on chip per chip, 8 MB shared / 2 cores |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L) |
| Storage: | 1 x 200 GB SATAIII SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP3 (x86_64) kernel 4.4.114-94.11-default |
| Compiler: | C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC |
| Parallel: | No |
| Firmware: | Supermicro BIOS version 1.0b released Feb-2018 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc general purpose malloc implementation V4.5.0 |

**Supermicro**
A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7351)

SPECrate2017_fp_base = 189
SPECrate2017_fp_peak = 187

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro
**Test Date:** Mar-2018
**Hardware Availability:** Jun-2017
**Software Availability:** Feb-2018

## Results Table

| Benchmark | Base Copies | Base Seconds | Base Ratio | Base Seconds | Base Ratio | Base Seconds | Base Ratio | Peak Copies | Peak Seconds | Peak Ratio | Peak Seconds | Peak Ratio | Peak Seconds | Peak Ratio |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 503.bwaves_r | 64 | **1018** | **631** | 1010 | 636 | 1028 | 625 | 32 | **530** | **605** | 532 | 603 | 523 | 613 |
| 507.cactuBSSN_r | 64 | 452 | 179 | **451** | **180** | 451 | 180 | 64 | 461 | 176 | **461** | **176** | 461 | 176 |
| 508.namd_r | 64 | 440 | 138 | **439** | **139** | 438 | 139 | 64 | 398 | 153 | **398** | **153** | 398 | 153 |
| 510.parest_r | 64 | 1054 | 159 | **1055** | **159** | 1056 | 159 | 32 | 553 | 151 | 556 | 151 | **555** | **151** |
| 511.povray_r | 64 | 887 | 168 | **858** | **174** | 856 | 175 | 64 | 830 | 180 | **830** | **180** | 834 | 179 |
| 519.lbm_r | 64 | 497 | 136 | **502** | **134** | 505 | 134 | 32 | 264 | 128 | 262 | 129 | **263** | **128** |
| 521.wrf_r | 64 | **732** | **196** | 699 | 205 | 735 | 195 | 32 | **436** | **164** | 433 | 166 | 445 | 161 |
| 526.blender_r | 64 | 516 | 189 | 500 | 195 | **504** | **193** | 64 | 505 | 193 | 519 | 188 | **506** | **193** |
| 527.cam4_r | 64 | **666** | **168** | 671 | 167 | 650 | 172 | 64 | 668 | 168 | **657** | **170** | 652 | 172 |
| 538.imagick_r | 64 | 639 | 249 | 629 | 253 | **632** | **252** | 64 | 625 | 255 | 632 | 252 | **631** | **252** |
| 544.nab_r | 64 | **510** | **211** | 512 | 210 | 509 | 212 | 64 | 510 | 211 | 510 | 211 | **510** | **211** |
| 549.fotonik3d_r | 64 | 1393 | 179 | **1395** | **179** | 1396 | 179 | 32 | **682** | **183** | 679 | 184 | 686 | 182 |
| 554.roms_r | 64 | 916 | 111 | 936 | 109 | **919** | **111** | 32 | 469 | 109 | **452** | **112** | 450 | 113 |

**SPECrate2017_fp_base = 189**

**SPECrate2017_fp_peak = 187**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOC_CONF = "lg_chunk:28"

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
http://developer.amd.com/amd-aocc/
with gfortran. It is available here:
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS Settings:
Determinism Slider = Power
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-pm02 Wed Mar 28 20:35:12 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7351 16-Core Processor
       2  "physical id"s (chips)
       64 "processors"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
       physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                64
      On-line CPU(s) list:   0-63
      Thread(s) per core:    2
      Core(s) per socket:    16
      Socket(s):             2
      NUMA node(s):          8
      Vendor ID:             AuthenticAMD
      CPU family:            23
      Model:                 1
      Model name:            AMD EPYC 7351 16-Core Processor
      Stepping:              2
      CPU MHz:               2400.000
      CPU max MHz:           2400.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              4800.24
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             64K
      L2 cache:              512K
      L3 cache:              8192K
      NUMA node0 CPU(s):     0-3,32-35
      NUMA node1 CPU(s):     4-7,36-39
      NUMA node2 CPU(s):     8-11,40-43
      NUMA node3 CPU(s):     12-15,44-47
      NUMA node4 CPU(s):     16-19,48-51
      NUMA node5 CPU(s):     20-23,52-55
      NUMA node6 CPU(s):     24-27,56-59
      NUMA node7 CPU(s):     28-31,60-63
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
      flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
      ibpb overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 32 33 34 35
   node 0 size: 128850 MB
   node 0 free: 128684 MB
   node 1 cpus: 4 5 6 7 36 37 38 39
   node 1 size: 129021 MB
   node 1 free: 128888 MB
   node 2 cpus: 8 9 10 11 40 41 42 43
   node 2 size: 129021 MB
   node 2 free: 128891 MB
   node 3 cpus: 12 13 14 15 44 45 46 47
   node 3 size: 129021 MB
   node 3 free: 128798 MB
   node 4 cpus: 16 17 18 19 48 49 50 51
   node 4 size: 129021 MB
   node 4 free: 128880 MB
   node 5 cpus: 20 21 22 23 52 53 54 55
   node 5 size: 129021 MB
   node 5 free: 128900 MB
   node 6 cpus: 24 25 26 27 56 57 58 59
   node 6 size: 129021 MB
   node 6 free: 128896 MB
   node 7 cpus: 28 29 30 31 60 61 62 63
   node 7 size: 129019 MB
   node 7 free: 128849 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  16  16  16  32  32  32  32
     1:  16  10  16  16  32  32  32  32
     2:  16  16  10  16  32  32  32  32
     3:  16  16  16  10  32  32  32  32
     4:  32  32  32  32  10  16  16  16
     5:  32  32  32  32  16  10  16  16
     6:  32  32  32  32  16  16  10  16
     7:  32  32  32  32  16  16  16  10

 From /proc/meminfo
    MemTotal:       1056765588 kB
    HugePages_Total:       0
```

(Continued on next page)

## Platform Notes (Continued)

```
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-pm02 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Mar 28 10:59

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   145G  2.8G  142G   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 1.0b 02/07/2018
   Memory:
    16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
      peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

(Continued on next page)

# Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang gfortran`

# Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64`
526.blender_r: `-funsigned-char -D__BOOL_DEFINED -DSPEC_LP64`
527.cam4_r: `-DSPEC_CASE_FLAG -DSPEC_LP64`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

# Base Optimization Flags

C benchmarks:
```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:
```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:
```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran  -lamdlibm
```

(Continued on next page)

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -disable-vect-cmp -O3`(clang) `-ffast-math -march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000 -O3`(gfortran) `-mavx -madx -funroll-loops -z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm`

Benchmarks using both C and C++:
`-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc`

Benchmarks using Fortran, C, and C++:
`-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -disable-vect-cmp -O3`(clang) `-ffast-math -march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive -O3`(gfortran) `-mavx -madx -funroll-loops -z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc`

## Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`clang gfortran`

Benchmarks using both Fortran and C:
`clang gfortran`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang gfortran`

Supermicro
A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7351)

SPECrate2017_fp_base = 189
SPECrate2017_fp_peak = 187

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro
**Test Date:** Mar-2018
**Hardware Availability:** Jun-2017
**Software Availability:** Feb-2018

# Peak Portability Flags

Same as Base Portability Flags

# Peak Optimization Flags

C benchmarks:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc

C++ benchmarks:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc

Fortran benchmarks:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

Benchmarks using both Fortran and C:

521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3(clang) -mavx -ffast-math -O3(gfortran) -funroll-loops -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -finline-aggressive -ljemalloc

(Continued on next page)

Supermicro
A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7351)

SPECrate2017_fp_base = 189
SPECrate2017_fp_peak = 187

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro
**Test Date:** Mar-2018
**Hardware Availability:** Jun-2017
**Software Availability:** Feb-2018

# Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revC.2018-03-20.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revC.2018-03-20.xml



Tested with SPEC CPU2017 v1.0.2 on 2018-03-28 08:35:11-0400.
Report generated on 2019-02-21 15:45:10 by CPU2017 PS formatter v6067.
Originally published on 2018-06-12.