SPEC® CPU2017 Floating Point Rate Result

Huawei

Huawei 2488H V5 (Intel Xeon Gold 6140M)

SPECrate2017_fp_base = 359

SPECrate2017_fp_peak = Not Run

CPU2017 License:	3175	**Test Date:**	May-2018
Test Sponsor:	Huawei	**Hardware Availability:**	May-2018
Tested by:	Huawei	**Software Availability:**	Mar-2018

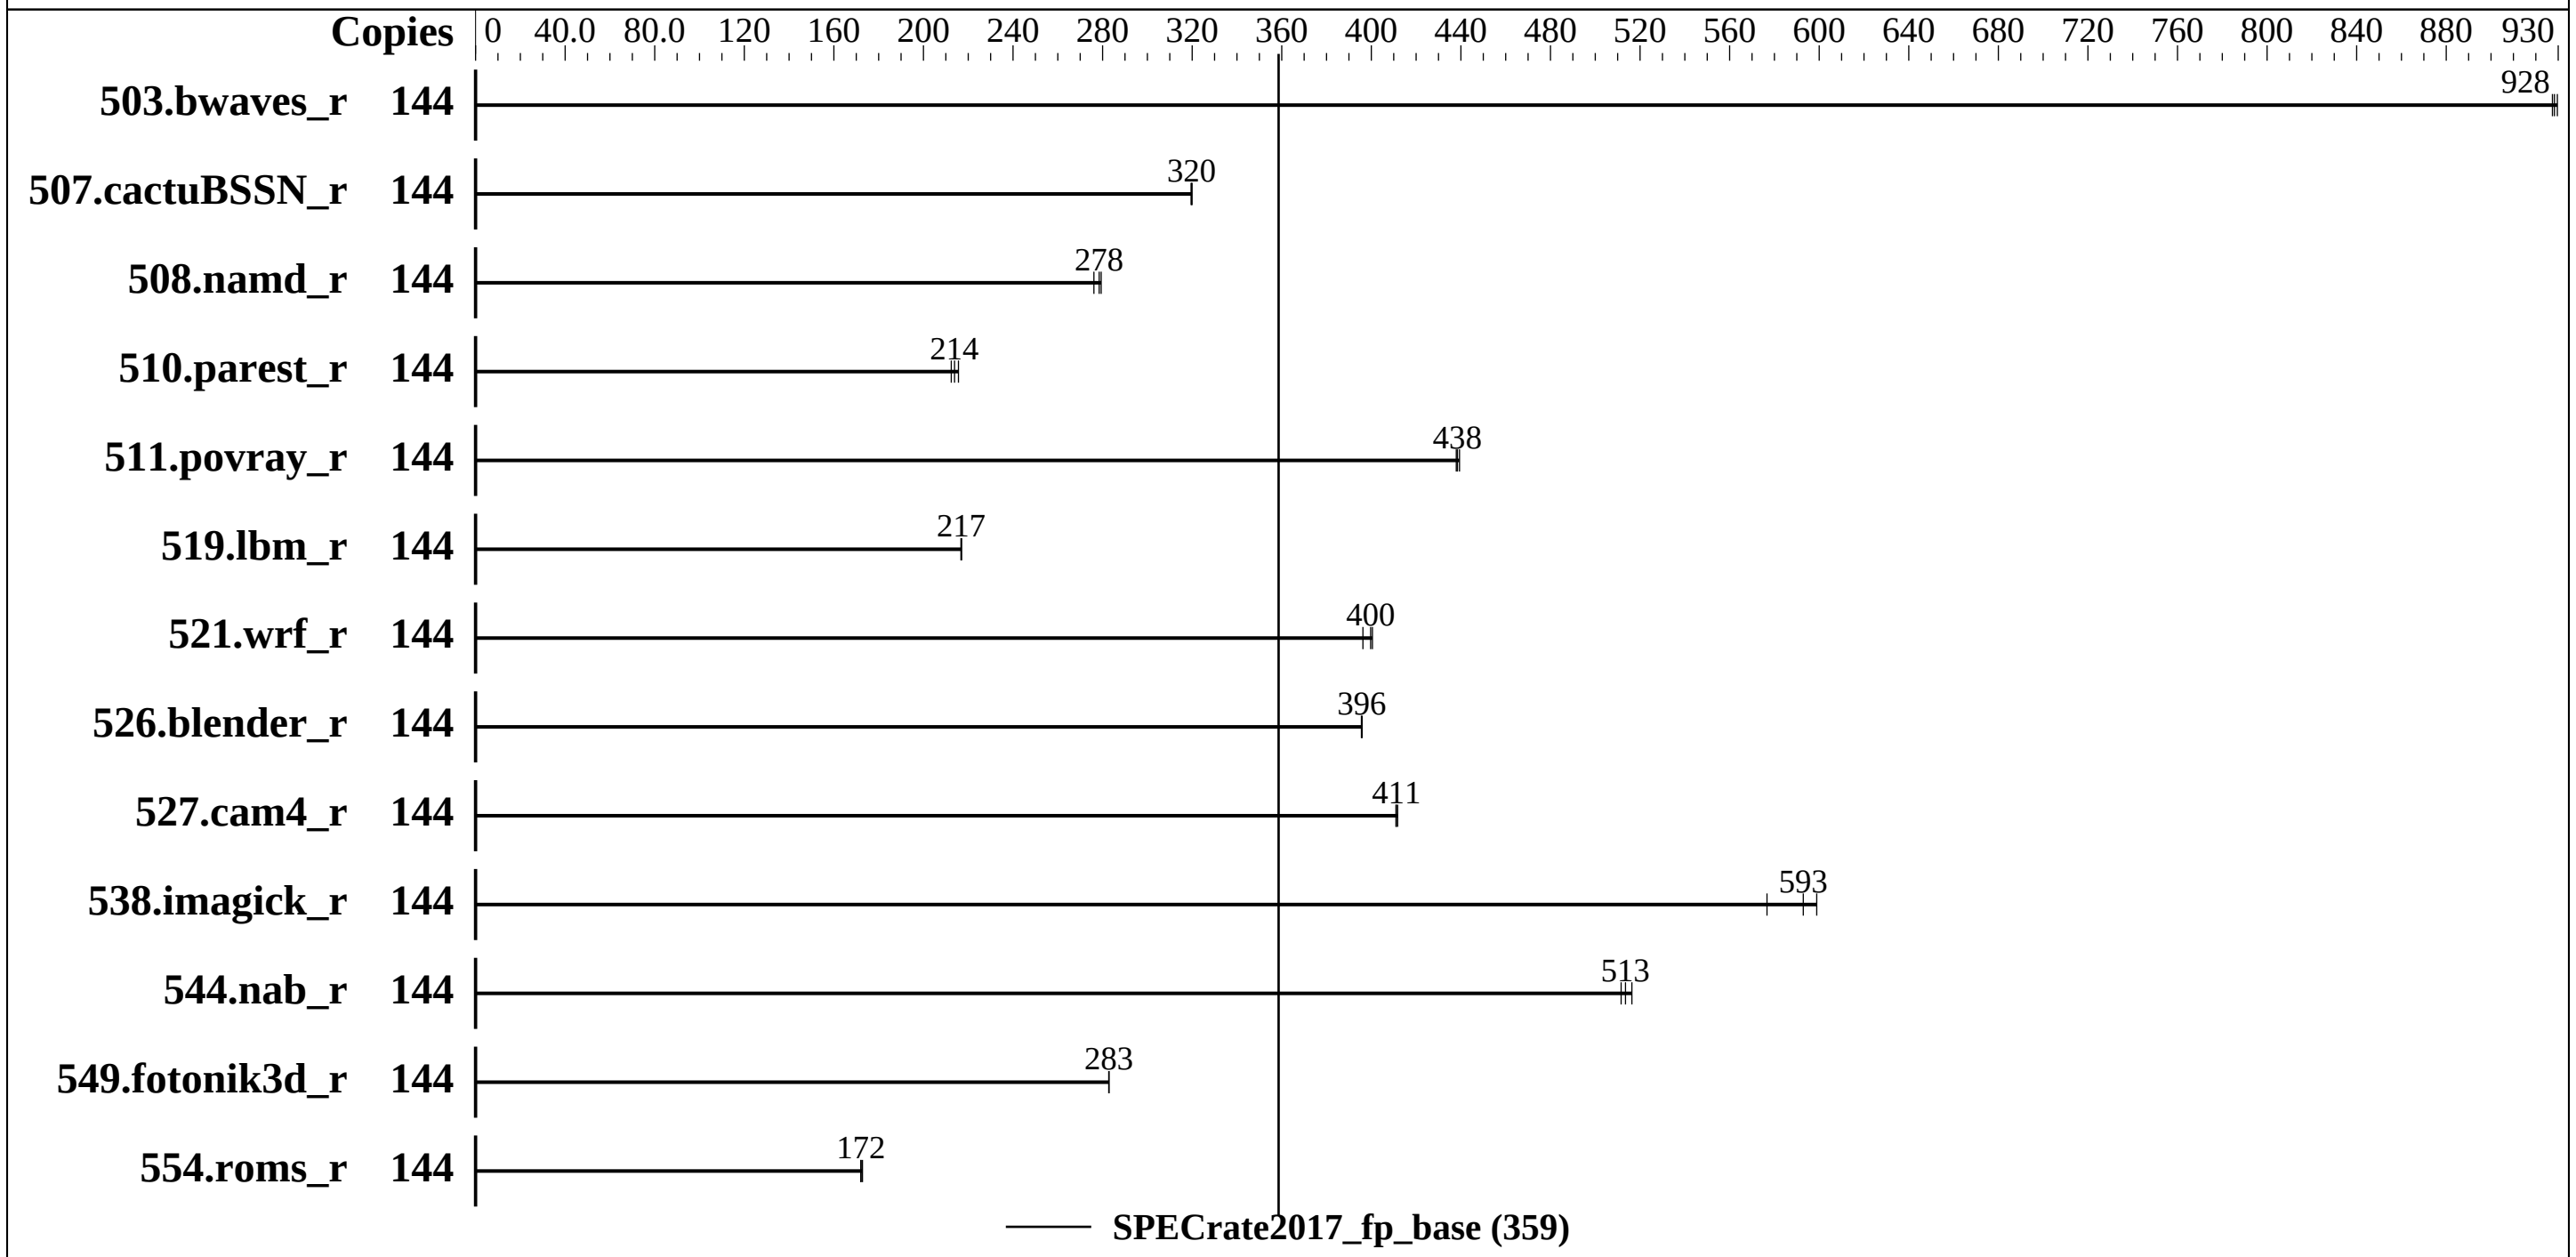

Hardware

CPU Name:	Intel Xeon Gold 6140M
Max MHz.:	3700
Nominal:	2300
Enabled:	72 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 900 GB SAS HDD 10K RPM, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 0.84 released Mar-2018
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

Huawei

Huawei 2488H V5 (Intel Xeon Gold 6140M)

SPECrate2017_fp_base = 359

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: May-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	1557	927	**1556**	**928**	1553	930							
507.cactuBSSN_r	144	**570**	**320**	571	320	570	320							
508.namd_r	144	**491**	**278**	495	276	490	279							
510.parest_r	144	1773	212	**1761**	**214**	1747	216							
511.povray_r	144	768	438	765	439	**767**	**438**							
519.lbm_r	144	699	217	700	217	**700**	**217**							
521.wrf_r	144	805	400	**807**	**400**	814	396							
526.blender_r	144	**554**	**396**	554	396	554	396							
527.cam4_r	144	612	412	**612**	**411**	613	411							
538.imagick_r	144	598	599	621	577	**604**	**593**							
544.nab_r	144	**472**	**513**	469	516	474	512							
549.fotonik3d_r	144	**1984**	**283**	1984	283	1985	283							
554.roms_r	144	1324	173	**1329**	**172**	1330	172							

SPECrate2017_fp_base = 359

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Sub NUMA Cluster (SNC) set to enabled
IMC (Integrated memory controller) Interleaving set to 1 way interleave
Xtended Prediction Table (XPT) Prefetch set to Enable
Memory Patrol Scrub set to Disable
Last Level Cache (LLC) Prefetch set to Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-scjg Mon May  7 21:36:04 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6140M CPU @ 2.30GHz
      4  "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                144
     On-line CPU(s) list:   0-143
     Thread(s) per core:    2
     Core(s) per socket:    18
     Socket(s):             4
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6140M CPU @ 2.30GHz
      Stepping:              4
      CPU MHz:               2301.000
      CPU max MHz:           2301.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4600.03
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              25344K
      NUMA node0 CPU(s):     0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
      NUMA node1 CPU(s):     3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
      NUMA node2 CPU(s):     18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
      NUMA node3 CPU(s):     21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
      NUMA node4 CPU(s):     36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
      NUMA node5 CPU(s):     39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
      NUMA node6 CPU(s):     54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
      NUMA node7 CPU(s):     57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
      intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
      avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
      xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 25344 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
   node 0 size: 191756 MB
   node 0 free: 185214 MB
   node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
   node 1 size: 193524 MB
   node 1 free: 189340 MB
   node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
```

(Continued on next page)

Platform Notes (Continued)

```
    node 2 size: 193524 MB
    node 2 free: 189706 MB
    node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
    node 3 size: 193524 MB
    node 3 free: 189675 MB
    node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
    node 4 size: 193524 MB
    node 4 free: 189709 MB
    node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
    node 5 size: 193524 MB
    node 5 free: 189704 MB
    node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
    node 6 size: 193524 MB
    node 6 free: 189746 MB
    node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
    node 7 size: 193365 MB
    node 7 free: 189606 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  20  20  20  20  20  20  20
      1:  20  10  20  20  20  20  20  20
      2:  20  20  10  20  20  20  20  20
      3:  20  20  20  10  20  20  20  20
      4:  20  20  20  20  10  20  20  20
      5:  20  20  20  20  20  10  20  20
      6:  20  20  20  20  20  20  10  20
      7:  20  20  20  20  20  20  20  10

  From /proc/meminfo
     MemTotal:       1583378416 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP2

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
```

(Continued on next page)

Platform Notes (Continued)

```
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-scjg 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 May 7 16:17

 SPEC is set to: /home/cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda4      btrfs  717G   51G  665G   8% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 0.84 03/26/2018
   Memory:
    48x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Huawei

Huawei 2488H V5 (Intel Xeon Gold 6140M)

SPECrate2017_fp_base = 359

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: May-2018
Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-05-07 09:36:03-0400.
Report generated on 2018-10-31 17:36:06 by CPU2017 PS formatter v6067.
Originally published on 2018-06-26.