SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 V5 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_base = 184

SPECspeed2017_fp_peak = 187

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

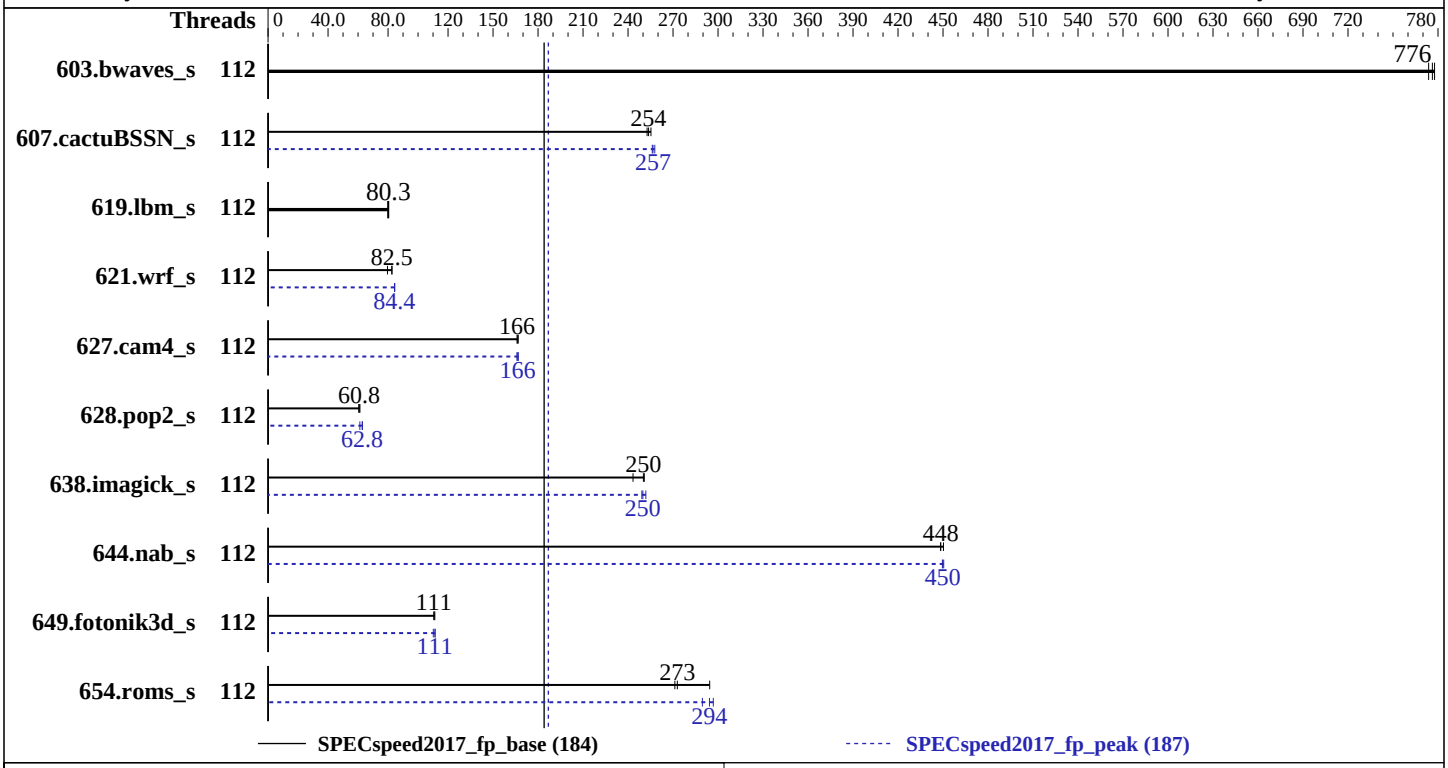

Hardware

CPU Name:	Intel Xeon Platinum 8180
Max MHz.:	3800
Nominal:	2500
Enabled:	112 cores, 4 chips
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 1200 GB SAS, 10000 RPM
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.3 (Maipo) 3.10.0-693.11.6.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Version 0.84 Released Mar-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 V5 (Intel Xeon Platinum 8180)

SPECspeed2017_fp_base = 184

SPECspeed2017_fp_peak = 187

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	75.9	778	**76.0**	**776**	76.2	774	112	75.9	778	**76.0**	**776**	76.2	774
607.cactuBSSN_s	112	**65.7**	**254**	65.3	255	66.0	253	112	**65.0**	**257**	64.7	258	65.1	256
619.lbm_s	112	65.7	79.8	65.1	80.5	**65.3**	**80.3**	112	65.7	79.8	65.1	80.5	**65.3**	**80.3**
621.wrf_s	112	**160**	**82.5**	166	79.6	160	82.7	112	157	84.3	157	84.4	**157**	**84.4**
627.cam4_s	112	53.1	167	53.4	166	**53.4**	**166**	112	53.4	166	**53.2**	**166**	53.1	167
628.pop2_s	112	194	61.3	196	60.5	**195**	**60.8**	112	194	61.2	189	62.9	**189**	**62.8**
638.imagick_s	112	57.5	251	**57.6**	**250**	59.3	243	112	57.9	249	**57.7**	**250**	57.3	252
644.nab_s	112	39.0	448	38.8	450	**39.0**	**448**	112	38.9	450	**38.8**	**450**	38.8	450
649.fotonik3d_s	112	82.4	111	**82.4**	**111**	82.0	111	112	82.7	110	81.8	111	**81.9**	**111**
654.roms_s	112	53.5	294	58.1	271	**57.7**	**273**	112	53.0	297	**53.5**	**294**	54.4	290

SPECspeed2017_fp_base = 184

SPECspeed2017_fp_peak = 187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 Power Policy Set to Load Balance
 Hyper-Threading Set to Disable
```

(Continued on next page)

Platform Notes (Continued)

```
 XPT Prefetch Set to Enabled
 Sysinfo program /spec/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on localhost.localdomain Wed Jun 13 06:36:33 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
       4  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                112
      On-line CPU(s) list:   0-111
      Thread(s) per core:    1
      Core(s) per socket:    28
      Socket(s):             4
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      Stepping:              4
      CPU MHz:               2501.000
      BogoMIPS:              5007.65
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
```

(Continued on next page)

Platform Notes (Continued)

```
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-27
      NUMA node1 CPU(s):     28-55
      NUMA node2 CPU(s):     56-83
      NUMA node3 CPU(s):     84-111

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    node 0 size: 391577 MB
    node 0 free: 381604 MB
    node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
    53 54 55
    node 1 size: 393216 MB
    node 1 free: 384472 MB
    node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
    81 82 83
    node 2 size: 393216 MB
    node 2 free: 384266 MB
    node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
    106 107 108 109 110 111
    node 3 size: 393216 MB
    node 3 free: 384252 MB
    node distances:
    node   0   1   2   3
      0:  10  21  21  21
      1:  21  10  21  21
      2:  21  21  10  21
      3:  21  21  21  10

  From /proc/meminfo
     MemTotal:       1583346560 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.3 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.3"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
```

(Continued on next page)

Platform Notes (Continued)

```
       ANSI_COLOR="0;31"
       CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
    redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
    2017 x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Jun 13 01:39

 SPEC is set to: /spec
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   400G   20G  381G   5% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 0.84 03/26/2018
   Memory:
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   619.lbm_s(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   607.cactuBSSN_s(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   621.wrf_s(peak) 628.pop2_s(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:
`icc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp -nostandard-realloc-lhs -align array32byte

654.roms_s: Same as 649.fotonik3d_s

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:
`-m64 -std=c11`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-13 06:36:32-0400.
Report generated on 2018-10-31 18:50:48 by CPU2017 PS formatter v6067.
Originally published on 2018-07-10.