SPEC® CPU2017 Floating Point Rate Result

Huawei

SPECrate2017_fp_base = 989

Huawei 9008 V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

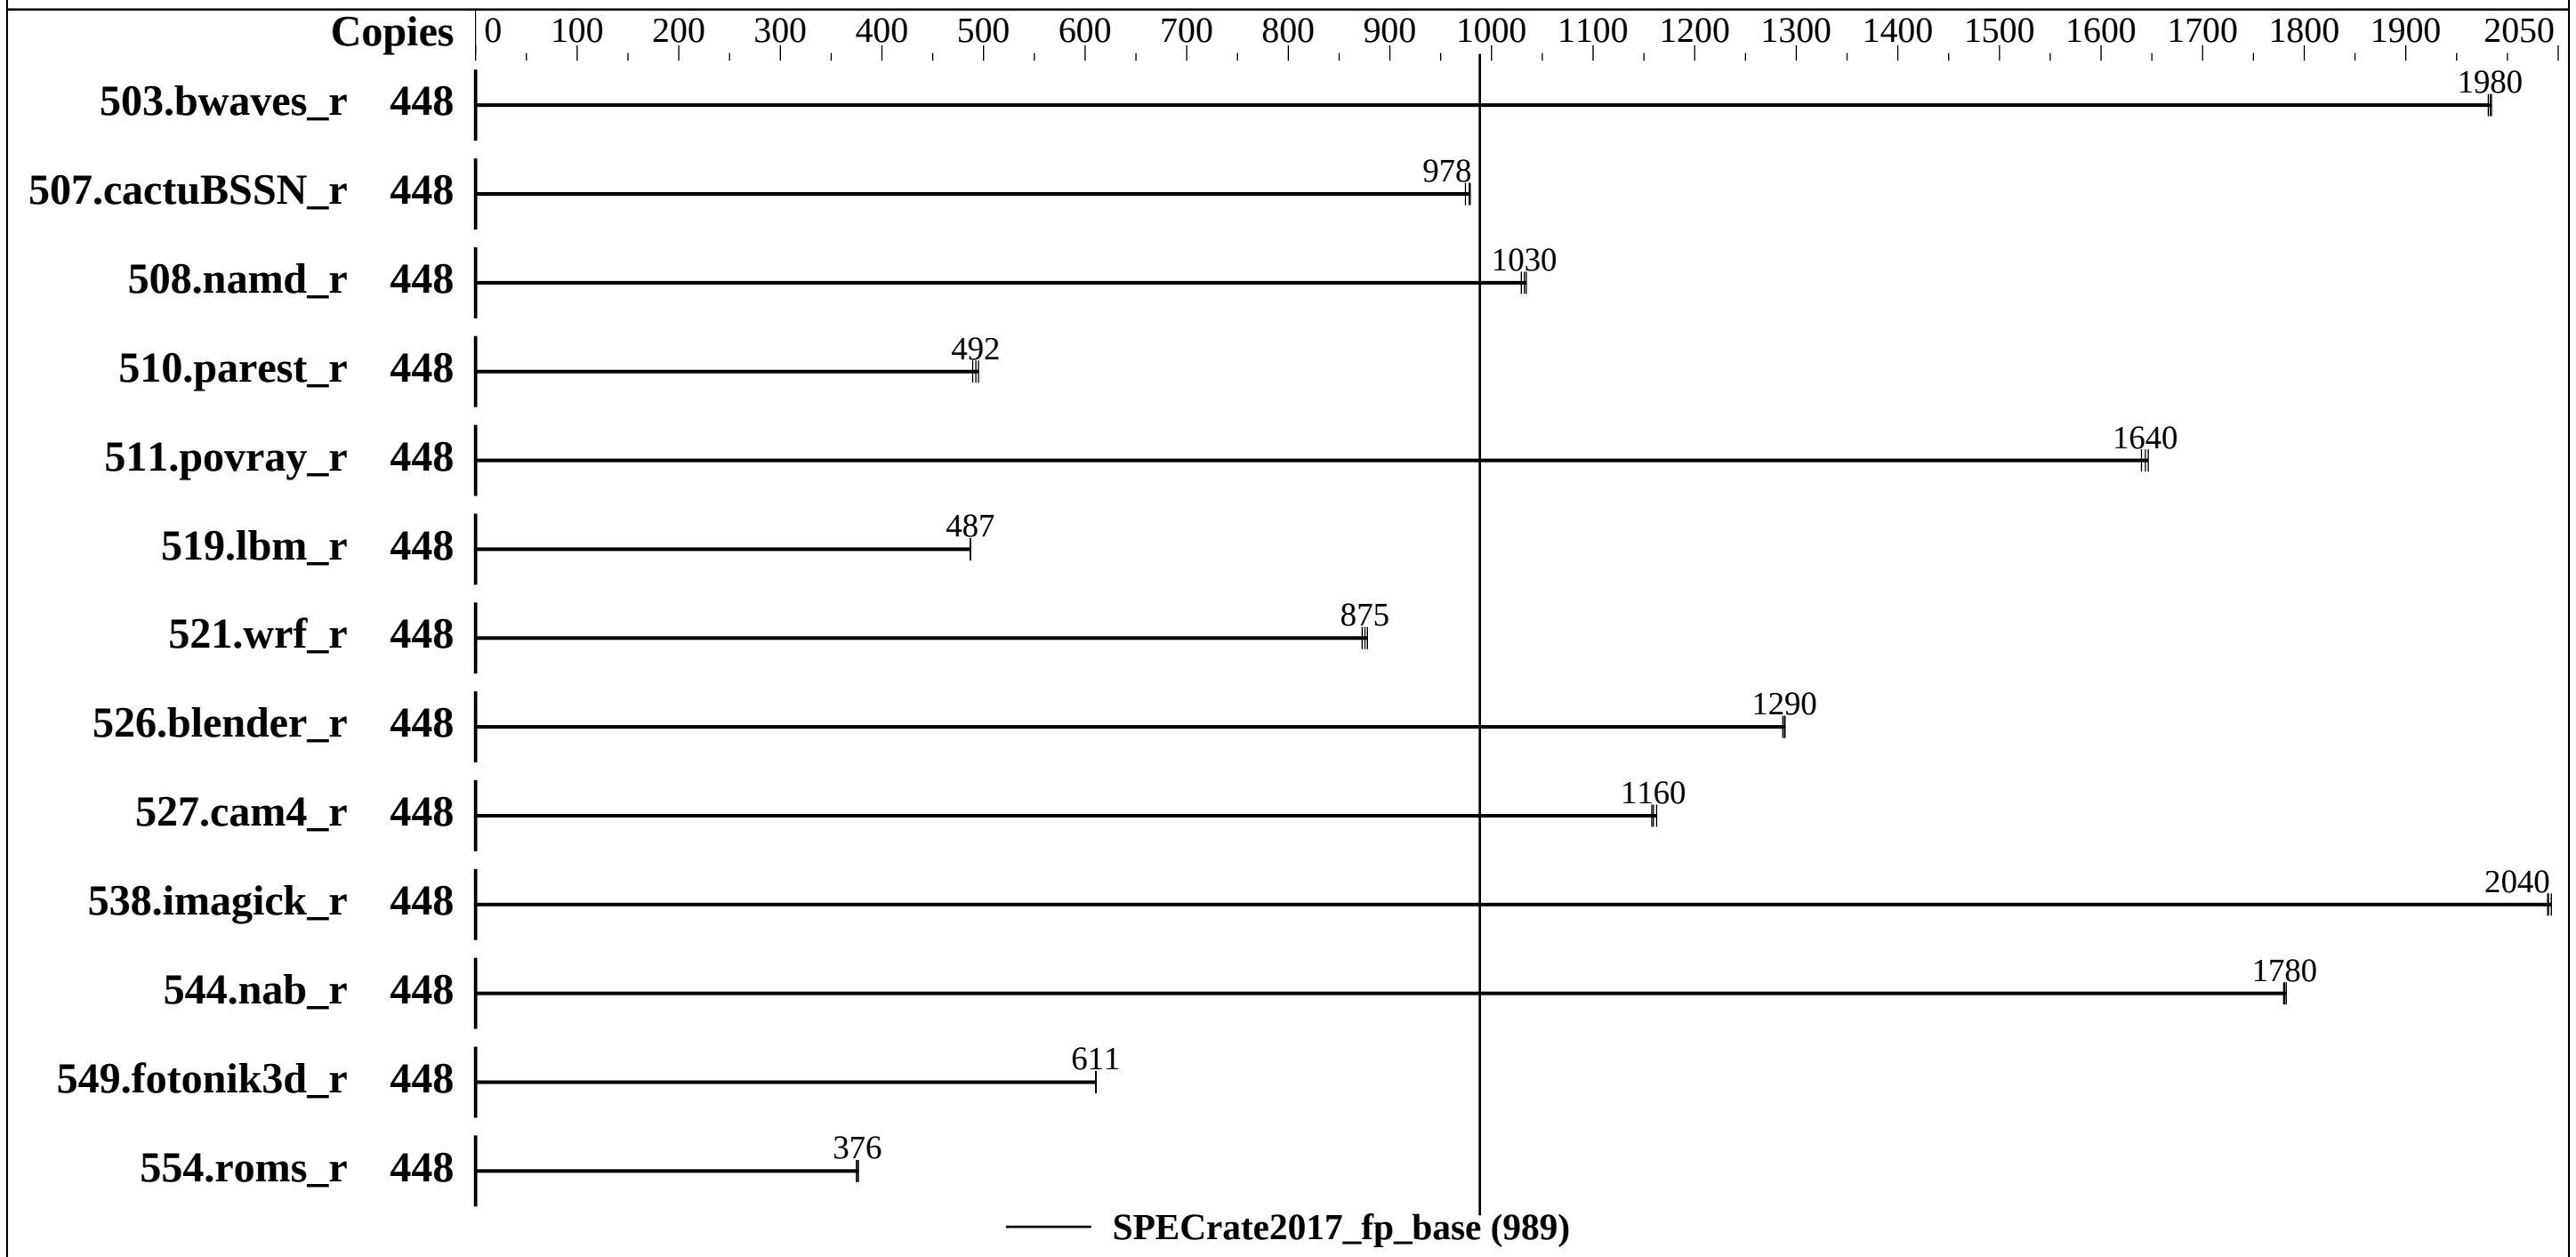

Hardware

CPU Name:	Intel Xeon Platinum 8180
Max MHz.:	3800
Nominal:	2500
Enabled:	224 cores, 8 chips, 2 threads/core
Orderable:	2,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	2 x 900 GB SAS HDD 10K RPM, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 8.92 released May-2018
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Rate Result

Huawei

Huawei 9008 V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 989

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Jun-2018
Hardware Availability: Jul-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	448	**2265**	**1980**	2268	1980	2264	1980							
507.cactuBSSN_r	448	579	979	**580**	**978**	582	974							
508.namd_r	448	**412**	**1030**	412	1030	413	1030							
510.parest_r	448	2367	495	**2380**	**492**	2395	489							
511.povray_r	448	638	1640	635	1650	**636**	**1640**							
519.lbm_r	448	**970**	**487**	969	487	970	487							
521.wrf_r	448	1150	873	1143	878	**1146**	**875**							
526.blender_r	448	**530**	**1290**	529	1290	530	1290							
527.cam4_r	448	**676**	**1160**	677	1160	674	1160							
538.imagick_r	448	546	2040	**546**	**2040**	545	2040							
544.nab_r	448	**423**	**1780**	423	1780	424	1780							
549.fotonik3d_r	448	**2859**	**611**	2859	611	2860	610							
554.roms_r	448	1889	377	**1893**	**376**	1899	375							

SPECrate2017_fp_base = **989**

SPECrate2017_fp_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Sub NUMA Cluster (SNC) set to enabled
IMC (Integrated memory controller) Interleaving set to 1 way interleave
Xtended Prediction Table (XPT) Prefetch set to Enable
Memory Patrol Scrub set to Disable
Last Level Cache (LLC) Prefetch set to Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-0mnb Fri Jun 29 04:33:50 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      8  "physical id"s (chips)
      448 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
```

(Continued on next page)

Platform Notes (Continued)

```
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                448
      On-line CPU(s) list:   0-447
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             8
      NUMA node(s):          16
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      Stepping:              4
      CPU MHz:               1000.000
      CPU max MHz:           2501.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5000.04
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
      NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
      NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
      NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
      NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
      NUMA node8 CPU(s):
      112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
      NUMA node9 CPU(s):
      116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
      NUMA node10 CPU(s):
      140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
      NUMA node11 CPU(s):
      144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391
      NUMA node12 CPU(s):
      168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415
      NUMA node13 CPU(s):
      172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419
      NUMA node14 CPU(s):
```

(Continued on next page)

Platform Notes (Continued)

```
       196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443
       NUMA node15 CPU(s):
       200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447
       Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
       aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
       avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
       intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept
       vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
       avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
       xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240
    241 245 246 247
    node 0 size: 95025 MB
    node 0 free: 93678 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243
    244 248 249 250 251
    node 1 size: 96762 MB
    node 1 free: 96223 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266
    267 268 269 273 274 275
    node 2 size: 96762 MB
    node 2 free: 96163 MB
    node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270
    271 272 276 277 278 279
    node 3 size: 96762 MB
    node 3 free: 96209 MB
    node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294
    295 296 297 301 302 303
    node 4 size: 96762 MB
    node 4 free: 96302 MB
    node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298
    299 300 304 305 306 307
    node 5 size: 96762 MB
    node 5 free: 96312 MB
    node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317
    322 323 324 325 329 330 331
    node 6 size: 96762 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 free: 96283 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335
node 7 size: 96762 MB
node 7 free: 96290 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339
343 344 345 350 351 352 353 357 358 359
node 8 size: 96762 MB
node 8 free: 96360 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346
347 348 349 354 355 356 360 361 362 363
node 9 size: 96762 MB
node 9 free: 96353 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367
371 372 373 378 379 380 381 385 386 387
node 10 size: 96762 MB
node 10 free: 96344 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374
375 376 377 382 383 384 388 389 390 391
node 11 size: 96762 MB
node 11 free: 96357 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395
399 400 401 406 407 408 409 413 414 415
node 12 size: 96762 MB
node 12 free: 96360 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402
403 404 405 410 411 412 416 417 418 419
node 13 size: 96762 MB
node 13 free: 96372 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423
427 428 429 434 435 436 437 441 442 443
node 14 size: 96762 MB
node 14 free: 96292 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430
431 432 433 438 439 440 444 445 446 447
node 15 size: 96605 MB
node 15 free: 96215 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  1:  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  2:  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20
  3:  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20
  4:  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20
  5:  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20
  6:  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20
  7:  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20
```

(Continued on next page)

Platform Notes (Continued)

```
     8:  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20
     9:  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20
    10:  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20
    11:  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20
    12:  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20
    13:  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20
    14:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20
    15:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10

 From /proc/meminfo
    MemTotal:       1583410940 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 2
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP2"
       VERSION_ID="12.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-0mnb 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 Jun 28 23:42

 SPEC is set to: /home/cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda4      btrfs  1.5T   23G  1.5T   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS INSYDE Corp. 8.92 05/02/2018
    Memory:
     48x NO DIMM NO DIMM
     48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`

(Continued on next page)

Base Portability Flags (Continued)

527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-06-28 16:33:49-0400.
Report generated on 2018-10-31 18:36:01 by CPU2017 PS formatter v6067.
Originally published on 2018-07-27.