



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

**SPECrate2017\_int\_base = 281**  
**SPECrate2017\_int\_peak = 310**

CPU2017 License: 4872


Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

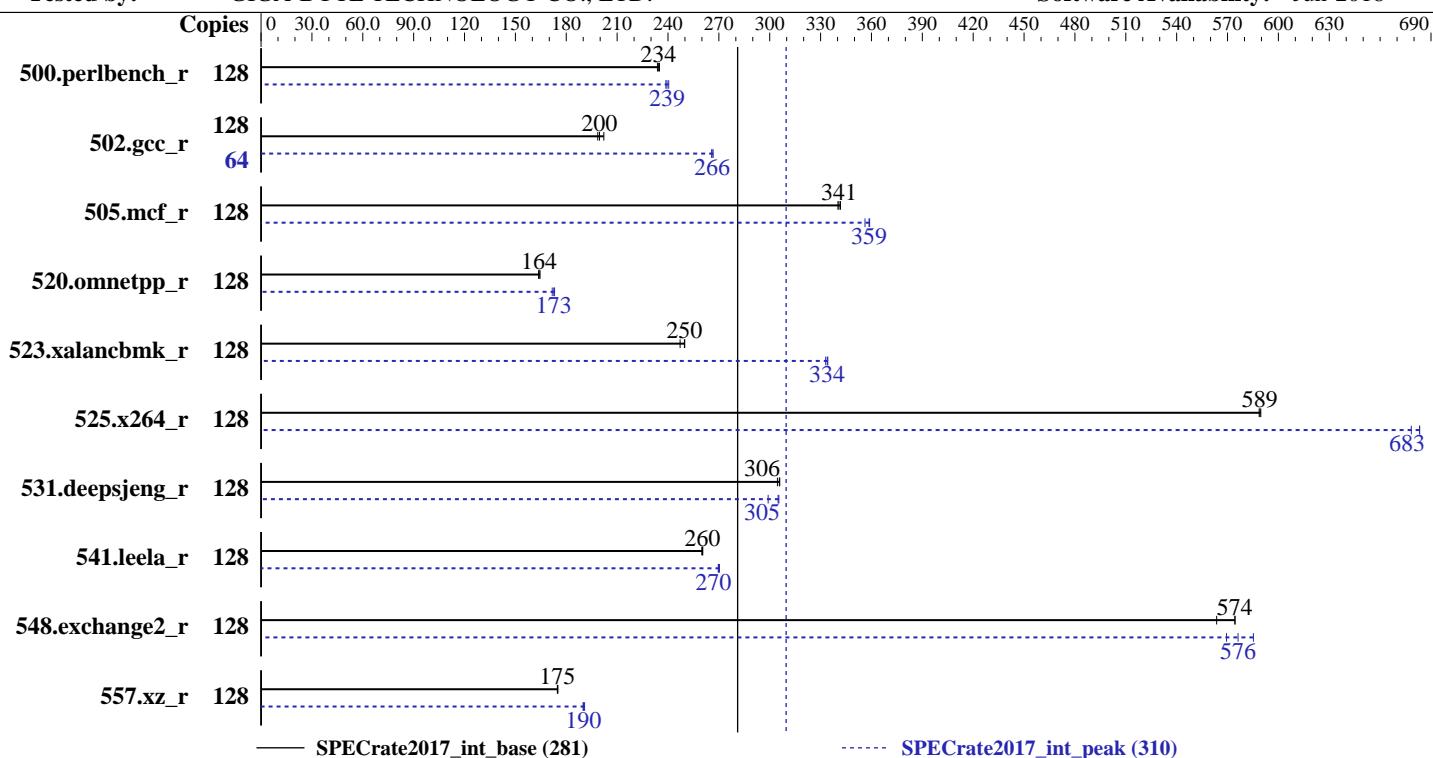

— Specrate2017\_int\_base (281)

----- Specrate2017\_int\_peak (310)

## Hardware

CPU Name: AMD EPYC 7601  
Max MHz.: 3200  
Nominal: 2200  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2667V-L)  
  
Storage: 1 x 2 TB SATA SSD  
Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
kernel 4.4.73-5-default  
  
Compiler: C/C++: Version 1.0.0 of AOCC  
Fortran: Version 4.8.2 of GCC  
  
Parallel: No  
Firmware: Version F07 released Jun-2018  
File System: xfs  
System State: Run Level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc general malloc implementation  
V4.5.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

**SPECrate2017\_int\_base = 281**  
**SPECrate2017\_int\_peak = 310**

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	872	234	867	235	<b>869</b>	<b>234</b>	128	854	239	<b>851</b>	<b>239</b>	848	240		
502.gcc_r	128	<b>908</b>	<b>200</b>	913	199	897	202	64	<b>341</b>	<b>266</b>	341	266	340	267		
505.mcf_r	128	605	342	608	340	<b>607</b>	<b>341</b>	128	576	359	581	356	<b>577</b>	<b>359</b>		
520.omnetpp_r	128	1026	164	1021	165	<b>1024</b>	<b>164</b>	128	978	172	<b>973</b>	<b>173</b>	970	173		
523.xalancbmk_r	128	541	250	<b>541</b>	<b>250</b>	547	247	128	406	333	<b>405</b>	<b>334</b>	404	334		
525.x264_r	128	381	589	380	590	<b>380</b>	<b>589</b>	128	<b>328</b>	<b>683</b>	328	683	330	678		
531.deepsjeng_r	128	<b>480</b>	<b>306</b>	482	305	480	306	128	490	299	480	305	<b>481</b>	<b>305</b>		
541.leela_r	128	816	260	<b>814</b>	<b>260</b>	814	260	128	<b>786</b>	<b>270</b>	786	270	784	270		
548.exchange2_r	128	595	564	<b>584</b>	<b>574</b>	584	574	128	589	569	<b>582</b>	<b>576</b>	573	585		
557.xz_r	128	<b>790</b>	<b>175</b>	790	175	791	175	128	728	190	725	191	<b>727</b>	<b>190</b>		

**SPECrate2017\_int\_base = 281**

**SPECrate2017\_int\_peak = 310**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness). Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_int\_base = 281  
SPECrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/amd/CPU2017/amd1704-rate-libs-revC/64;/home/amd/CPU2017/amd1704-rate-libs-revC/32;"  
MALLOC_CONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /home/amd/CPU2017/bin/sysinfo

```
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-qb43 Wed Jun 20 23:34:05 2018
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7601 32-Core Processor
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Platform Notes (Continued)

```
2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7601 32-Core Processor
Stepping:               2
CPU MHz:               2200.000
CPU max MHz:           2200.0000
CPU min MHz:           1200.0000
BogoMIPS:              4400.22
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
                        pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
                        rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_int\_base = 281  
SPECrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Platform Notes (Continued)

```
hw_pstate npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold vmmcall avic fsgsbase bmil avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128896 MB
node 0 free: 128670 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129021 MB
node 1 free: 128834 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129021 MB
node 2 free: 128826 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129021 MB
node 3 free: 128834 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129021 MB
node 4 free: 128837 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129021 MB
node 5 free: 128834 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129021 MB
node 6 free: 128839 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 116924 MB
node 7 free: 116741 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 16 16 16 32 32 32 32
 1: 16 10 16 16 32 32 32 32
 2: 16 16 10 16 32 32 32 32
 3: 16 16 16 10 32 32 32 32
 4: 32 32 32 32 10 16 16 16
 5: 32 32 32 32 16 10 16 16
 6: 32 32 32 32 16 16 10 16
 7: 32 32 32 32 16 16 16 10
```

```
From /proc/meminfo
MemTotal: 1044426228 kB
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

**SPECrate2017\_int\_base = 281**  
**SPECrate2017\_int\_peak = 310**

CPU2017 License: 4872

**Test Date:** Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

**Hardware Availability:** Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

**Software Availability:** Jun-2018

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
```

```
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-qb43 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 19 13:54
```

```
SPEC is set to: /home/amd/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb4        xfs   1.8T  4.7G  1.8T   1% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE F07 06/13/2018

Memory:

16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667  
16x Unknown Unknown

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 502.gcc_r(peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

SPECCrate2017\_int\_base = 281  
SPECCrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

=====  
CXXC 523.xalancbmk\_r(peak)

---

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

---

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

---

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

---

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

**SPECrate2017\_int\_base = 281**  
**SPECrate2017\_int\_peak = 310**

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Compiler Version Notes (Continued)

=====  
CXXC 541.leela\_r(peak)

AOCC\_LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC\_LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
FC 548.exchange2\_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_int\_base = 281  
SPECrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Base Portability Flags (Continued)

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R181-Z90

(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_int\_base = 281

SPECrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Peak Portability Flags (Continued)

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -D\_FILE\_OFFSET\_BITS=64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc

502.gcc\_r: -m32 -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -fgnu89-inline  
-L/root/work/lib/jemalloc/lib32 -ljemalloc

505.mcf\_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.  
R181-Z90  
(AMD EPYC 7601, 2.20 GHz)

SPECrate2017\_int\_base = 281  
SPECrate2017\_int\_peak = 310

CPU2017 License: 4872

Test Date: Jun-2018

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: Mar-2018

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Jun-2018

## Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000  
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm  
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math  
-Ofast -fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-20 11:34:04-0400.

Report generated on 2019-02-21 17:32:33 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-24.