SPEC® CPU2017 Integer Rate Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL170r Gen10
(2.20 GHz, Intel Xeon Gold 5120)

SPECrate2017_int_base = 132

SPECrate2017_int_peak = 141

CPU2017 License:	3	**Test Date:**	Jul-2018
Test Sponsor:	HPE	**Hardware Availability:**	Jul-2018
Tested by:	HPE	**Software Availability:**	May-2018

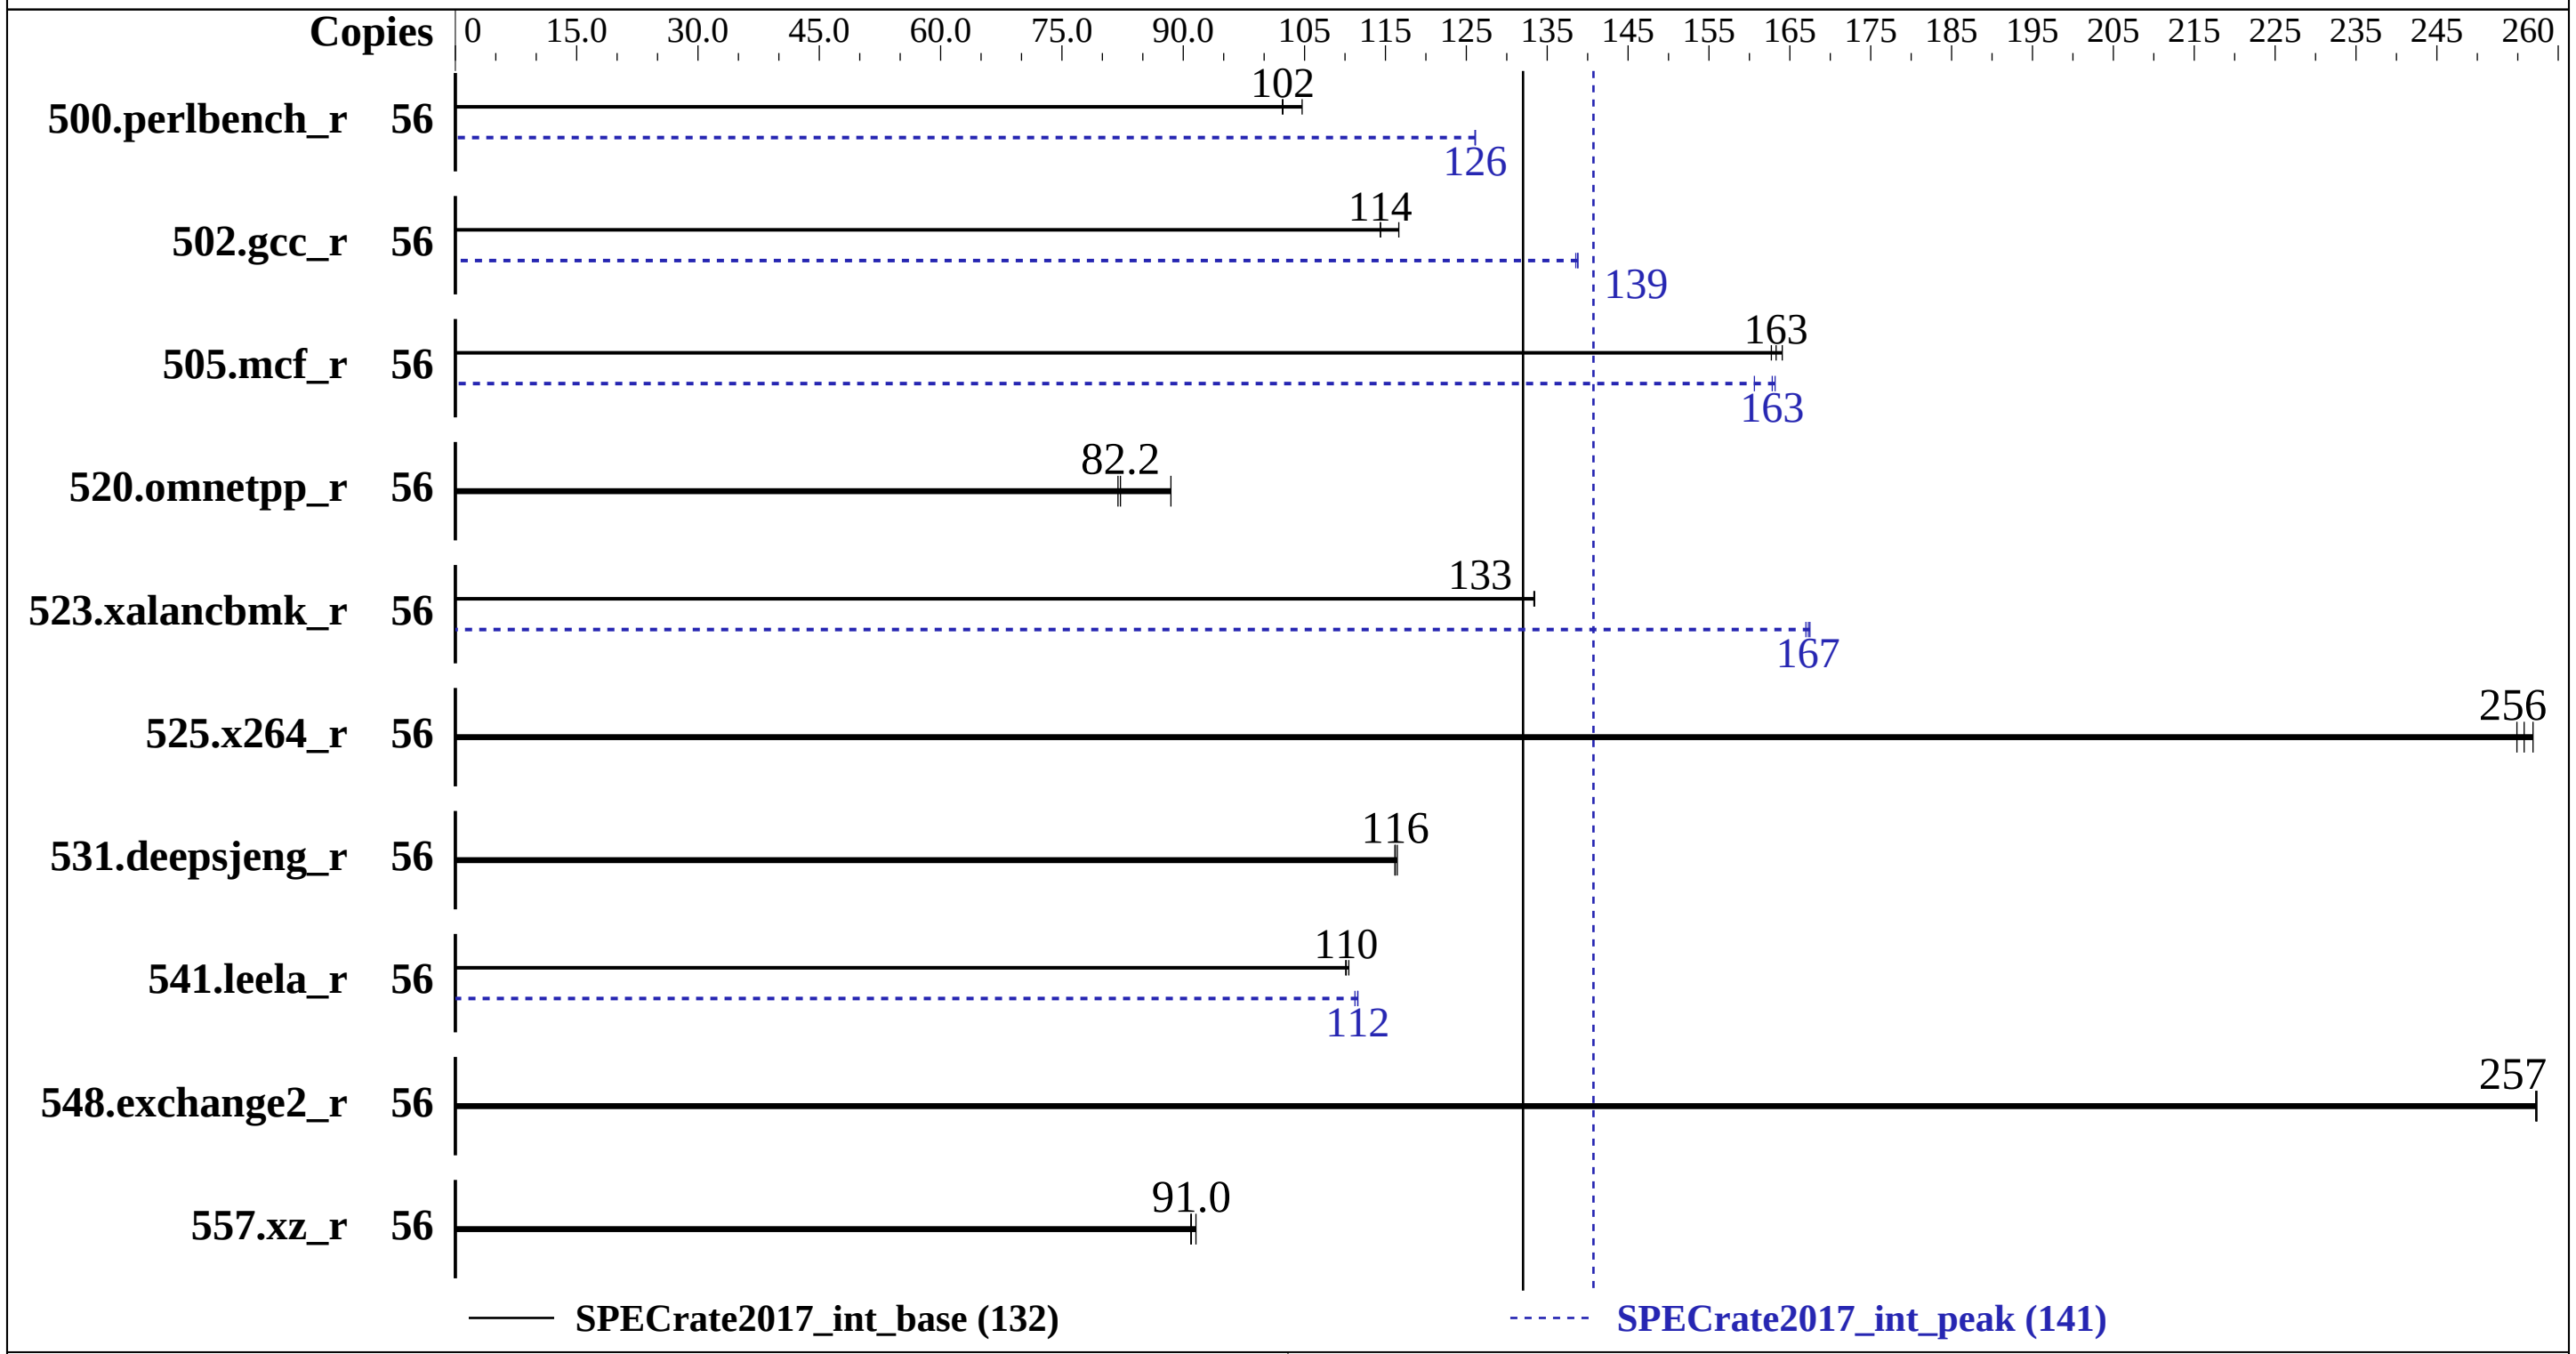

Hardware

CPU Name:	Intel Xeon Gold 5120
Max MHz.:	3200
Nominal:	2200
Enabled:	28 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	19.25 MB I+D on chip per chip
Other:	None
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage:	2 x 2 TB 7.2K SAS HDD, RAID 1
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.121-92.76-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	HPE BIOS Version U38 released Jul-2018 tested as Jun-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1

SPEC CPU2017 Integer Rate Result

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	56	852	105	872	102	**871**	**102**	56	707	126	**707**	**126**	707	126
502.gcc_r	56	680	117	**693**	**114**	693	114	56	572	139	571	139	**571**	**139**
505.mcf_r	56	556	163	552	164	**554**	**163**	56	563	161	**556**	**163**	555	163
520.omnetpp_r	56	830	88.5	897	81.9	**893**	**82.2**	56	830	88.5	897	81.9	**893**	**82.2**
523.xalancbmk_r	56	**443**	**133**	443	133	443	133	56	353	167	**354**	**167**	354	167
525.x264_r	56	382	257	**383**	**256**	385	255	56	382	257	**383**	**256**	385	255
531.deepsjeng_r	56	551	116	**552**	**116**	552	116	56	551	116	**552**	**116**	552	116
541.leela_r	56	**842**	**110**	842	110	839	110	56	831	112	834	111	**831**	**112**
548.exchange2_r	56	570	257	**570**	**257**	570	257	56	570	257	**570**	**257**	570	257
557.xz_r	56	660	91.6	**665**	**91.0**	665	90.9	56	660	91.6	**665**	**91.0**	665	90.9

SPECrate2017_int_base = **132**

SPECrate2017_int_peak = **141**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
  sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
  numactl --interleave=all runcpu <etc>
Benchmark was conducted on a pre-release kernel (Kernel 4.4.121-92.76-default) which has the
same performance as the release version (Kernel 4.4.121-92.80-default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32:/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
 Memory patrol Scrubbing set to Disabled
 Intel Virtualization Technology (Intel VT) set to Enabled
 Intel VT-d set to Enabled
 SR-IOV set to Enabled
 LLC Dead Line Allocation set to Disabled
 LLC Prefetch set to Enabled
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to General Throughput Compute
   Minimum Processor Idle Power Core C-state set to C1E State
 Workload Profile set to Custom
   Uncore Frequency Scaling set to Auto
 Sysinfo program /cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on pl16 Wed Jul  4 14:29:12 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
       2  "physical id"s (chips)
       56 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 14
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                56
```

(Continued on next page)

Platform Notes (Continued)

```
      On-line CPU(s) list:   0-55
      Thread(s) per core:    2
      Core(s) per socket:    14
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
      Stepping:              4
      CPU MHz:               2194.862
      BogoMIPS:              4389.72
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              19712K
      NUMA node0 CPU(s):     0-6,28-34
      NUMA node1 CPU(s):     7-13,35-41
      NUMA node2 CPU(s):     14-20,42-48
      NUMA node3 CPU(s):     21-27,49-55
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp rds retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

 /proc/cpuinfo cache data
    cache size : 19712 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 28 29 30 31 32 33 34
   node 0 size: 47953 MB
   node 0 free: 40240 MB
   node 1 cpus: 7 8 9 10 11 12 13 35 36 37 38 39 40 41
   node 1 size: 48381 MB
   node 1 free: 41829 MB
   node 2 cpus: 14 15 16 17 18 19 20 42 43 44 45 46 47 48
   node 2 size: 48381 MB
   node 2 free: 45570 MB
```

(Continued on next page)

Platform Notes (Continued)

```
    node 3 cpus: 21 22 23 24 25 26 27 49 50 51 52 53 54 55
    node 3 size: 48380 MB
    node 3 free: 45579 MB
    node distances:
    node   0   1   2   3
      0:  10  21  31  31
      1:  21  10  31  31
      2:  31  31  10  21
      3:  31  31  21  10

  From /proc/meminfo
     MemTotal:       197731768 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux pl16 4.4.121-92.76-default #1 SMP Tue May 8 19:06:40 UTC 2018 (95b450b) x86_64
     x86_64 x86_64 GNU/Linux

  run-level 3 Jul 4 12:18

  SPEC is set to: /cpu2017
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   1.9T   26G  1.8T   2% /

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS HPE U38 06/23/2018
    Memory:
```

(Continued on next page)

Platform Notes (Continued)

```
    12x HPE 840756-091 16 GB 2 rank 2666, configured at 2400
    4x UNKNOWN NOT AVAILABLE

 (End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 192 GB and the dmidecode description should have one line reading as:
12x HPE 840756-091 16 GB 2 rank 2666, configured at 2400
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)
     557.xz_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   548.exchange2_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):
icpc -m64

523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -fno-strict-overflow -L/usr/local/je5.0.1-64/lib -ljemalloc`

502.gcc_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

505.mcf_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

525.x264_r: `basepeak = yes`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib -ljemalloc`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-07-04 08:29:11-0400.
Report generated on 2018-10-31 18:34:24 by CPU2017 PS formatter v6067.
Originally published on 2018-07-27.