# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

## Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017_int_base = 615

SPECrate2017_int_peak = 646

**CPU2017 License:** 3175
**Test Sponsor:** Huawei
**Tested by:** Huawei

**Test Date:** Jun-2018
**Hardware Availability:** Jul-2018
**Software Availability:** Mar-2018

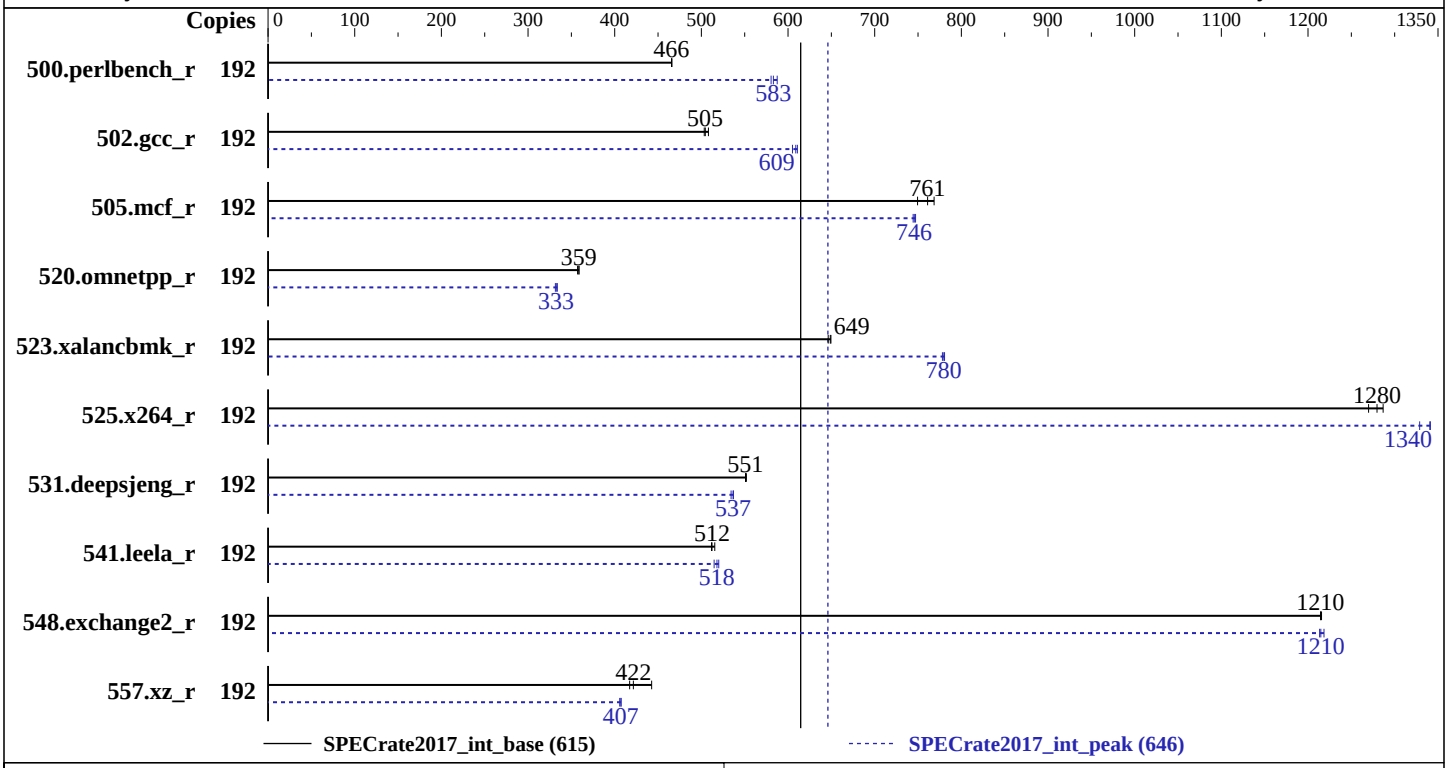


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8158 |
| Max MHz.: | 3700 |
| Nominal: | 3000 |
| Enabled: | 96 cores, 8 chips, 2 threads/core |
| Orderable: | 2,4,6,8 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 24.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R) |
| Storage: | 2 x 900 GB SAS HDD 10K RPM, RAID 0 |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server for SAP Applications 12 SP2<br>4.4.120-92.70-default |
| Compiler: | C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | Version 8.92 released May-2018 |
| File System: | btrfs |
| System State: | Run level 5 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library V5.0.1 |

# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

## Huawei 9008 V5 (Intel Xeon Platinum 8158)

SPECrate2017_int_base = 615

SPECrate2017_int_peak = 646

**CPU2017 License:** 3175
**Test Sponsor:** Huawei
**Tested by:** Huawei

**Test Date:** Jun-2018
**Hardware Availability:** Jul-2018
**Software Availability:** Mar-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 192 | 656 | 466 | **656** | **466** | 656 | 466 | 192 | 520 | 587 | 527 | 580 | **524** | **583** |
| 502.gcc_r | 192 | **539** | **505** | 540 | 503 | 535 | 508 | 192 | 445 | 611 | **446** | **609** | 449 | 605 |
| 505.mcf_r | 192 | 404 | 769 | **408** | **761** | 414 | 749 | 192 | 417 | 744 | 415 | 747 | **416** | **746** |
| 520.omnetpp_r | 192 | 705 | 357 | 702 | 359 | **703** | **359** | 192 | 755 | 334 | **757** | **333** | 760 | 332 |
| 523.xalancbmk_r | 192 | **313** | **649** | 314 | 646 | 312 | 650 | 192 | **260** | **780** | 260 | 781 | 261 | 778 |
| 525.x264_r | 192 | **263** | **1280** | 261 | 1290 | 265 | 1270 | 192 | 251 | 1340 | 253 | 1330 | **251** | **1340** |
| 531.deepsjeng_r | 192 | **399** | **551** | 399 | 552 | 399 | 551 | 192 | 412 | 534 | 410 | 537 | **410** | **537** |
| 541.leela_r | 192 | 621 | 512 | **621** | **512** | 617 | 515 | 192 | 618 | 515 | 611 | 520 | **614** | **518** |
| 548.exchange2_r | 192 | 414 | 1210 | **414** | **1210** | 414 | 1220 | 192 | 415 | 1210 | 413 | 1220 | **414** | **1210** |
| 557.xz_r | 192 | 468 | 443 | **492** | **422** | 497 | 417 | 192 | 511 | 406 | **509** | **407** | 509 | 407 |

**SPECrate2017_int_base = 615**

**SPECrate2017_int_peak = 646**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
```

**(Continued on next page)**

## General Notes (Continued)

```
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases;
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 BIOS configuration:
 Sub NUMA Cluster (SNC) set to enabled
 IMC (Integrated memory controller) Interleaving set to 1 way interleave
 Xtended Prediction Table (XPT) Prefetch set to Enable
 Memory Patrol Scrub set to Disable
 Last Level Cache (LLC) Prefetch set to Disable
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-0mnb Sat Jul 28 22:54:11 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz
       8  "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 12
       siblings  : 24
       physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
       physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
       physical 2: cores 0 1 2 3 4 8 9 11 17 18 19 20
       physical 3: cores 0 1 2 3 4 9 10 16 18 19 25 26
       physical 4: cores 0 1 2 3 4 9 10 16 18 19 25 26
       physical 5: cores 0 3 4 5 6 7 16 18 19 20 21 22
       physical 6: cores 0 1 2 3 4 9 10 16 18 19 25 26
       physical 7: cores 0 1 2 3 4 9 10 16 18 19 25 26

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):             8
NUMA node(s):          16
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz
Stepping:              4
CPU MHz:               1200.000
CPU max MHz:           3001.0000
CPU min MHz:           1200.0000
BogoMIPS:              5999.93
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              25344K
NUMA node0 CPU(s):     0-2,5,7,10,96-98,101,103,106
NUMA node1 CPU(s):     3,4,6,8,9,11,99,100,102,104,105,107
NUMA node2 CPU(s):     12-14,17,19,22,108-110,113,115,118
NUMA node3 CPU(s):     15,16,18,20,21,23,111,112,114,116,117,119
NUMA node4 CPU(s):     24-26,29,30,32,120-122,125,126,128
NUMA node5 CPU(s):     27,28,31,33-35,123,124,127,129-131
NUMA node6 CPU(s):     36-38,41,43,46,132-134,137,139,142
NUMA node7 CPU(s):     39,40,42,44,45,47,135,136,138,140,141,143
NUMA node8 CPU(s):     48-50,53,55,58,144-146,149,151,154
NUMA node9 CPU(s):     51,52,54,56,57,59,147,148,150,152,153,155
NUMA node10 CPU(s):    60-62,66-68,156-158,162-164
NUMA node11 CPU(s):    63-65,69-71,159-161,165-167
NUMA node12 CPU(s):    72-74,77,79,82,168-170,173,175,178
NUMA node13 CPU(s):    75,76,78,80,81,83,171,172,174,176,177,179
NUMA node14 CPU(s):    84-86,89,91,94,180-182,185,187,190
NUMA node15 CPU(s):    87,88,90,92,93,95,183,184,186,188,189,191
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 25344 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 1 2 5 7 10 96 97 98 101 103 106
   node 0 size: 95025 MB
   node 0 free: 94692 MB
   node 1 cpus: 3 4 6 8 9 11 99 100 102 104 105 107
   node 1 size: 96762 MB
   node 1 free: 96609 MB
   node 2 cpus: 12 13 14 17 19 22 108 109 110 113 115 118
   node 2 size: 96762 MB
   node 2 free: 96421 MB
   node 3 cpus: 15 16 18 20 21 23 111 112 114 116 117 119
   node 3 size: 96762 MB
   node 3 free: 96621 MB
   node 4 cpus: 24 25 26 29 30 32 120 121 122 125 126 128
   node 4 size: 96762 MB
   node 4 free: 96617 MB
   node 5 cpus: 27 28 31 33 34 35 123 124 127 129 130 131
   node 5 size: 96762 MB
   node 5 free: 96621 MB
   node 6 cpus: 36 37 38 41 43 46 132 133 134 137 139 142
   node 6 size: 96762 MB
   node 6 free: 96489 MB
   node 7 cpus: 39 40 42 44 45 47 135 136 138 140 141 143
   node 7 size: 96762 MB
   node 7 free: 96592 MB
   node 8 cpus: 48 49 50 53 55 58 144 145 146 149 151 154
   node 8 size: 96762 MB
   node 8 free: 96564 MB
   node 9 cpus: 51 52 54 56 57 59 147 148 150 152 153 155
   node 9 size: 96762 MB
   node 9 free: 96515 MB
   node 10 cpus: 60 61 62 66 67 68 156 157 158 162 163 164
   node 10 size: 96762 MB
   node 10 free: 96581 MB
   node 11 cpus: 63 64 65 69 70 71 159 160 161 165 166 167
   node 11 size: 96762 MB
   node 11 free: 96638 MB
   node 12 cpus: 72 73 74 77 79 82 168 169 170 173 175 178
   node 12 size: 96762 MB
   node 12 free: 96644 MB
   node 13 cpus: 75 76 78 80 81 83 171 172 174 176 177 179
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 13 size: 96762 MB
   node 13 free: 96565 MB
   node 14 cpus: 84 85 86 89 91 94 180 181 182 185 187 190
   node 14 size: 96762 MB
   node 14 free: 96642 MB
   node 15 cpus: 87 88 90 92 93 95 183 184 186 188 189 191
   node 15 size: 96605 MB
   node 15 free: 96496 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20
     1:  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20
     2:  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20
     3:  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20
     4:  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20
     5:  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20
     6:  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20
     7:  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20
     8:  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20
     9:  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20
    10:  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20
    11:  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20
    12:  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20
    13:  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20
    14:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20
    15:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10

From /proc/meminfo
   MemTotal:       1583410940 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```


**(Continued on next page)**

## Platform Notes (Continued)

```
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp2"

 uname -a:
    Linux linux-0mnb 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 Jul 28 22:51

 SPEC is set to: /home/cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda4      btrfs  1.5T   23G  1.5T   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 8.92 05/02/2018
   Memory:
    48x NO DIMM NO DIMM
    48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak) 502.gcc_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

## Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

## Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

## Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

## Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`

**(Continued on next page)**

## Peak Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

**(Continued on next page)**

## Peak Optimization Flags (Continued)

531.deepsjeng_r: `Same as 520.omnetpp_r`

541.leela_r: `Same as 520.omnetpp_r`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc`

## Peak Other Flags

C benchmarks (except as noted below):
`-m64 -std=c11`

502.gcc_r: `-m32 -std=c11`

C++ benchmarks (except as noted below):
`-m64`

523.xalancbmk_r: `-m32`

Fortran benchmarks:
`-m64`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml`


SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-07-28 10:54:10-0400.
Report generated on 2018-10-31 18:11:03 by CPU2017 PS formatter v6067.
Originally published on 2018-09-04.