SPEC® CPU2017 Floating Point Speed Result

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Bronze 3104)

SPECspeed2017_fp_base = 33.5

SPECspeed2017_fp_peak = 34.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

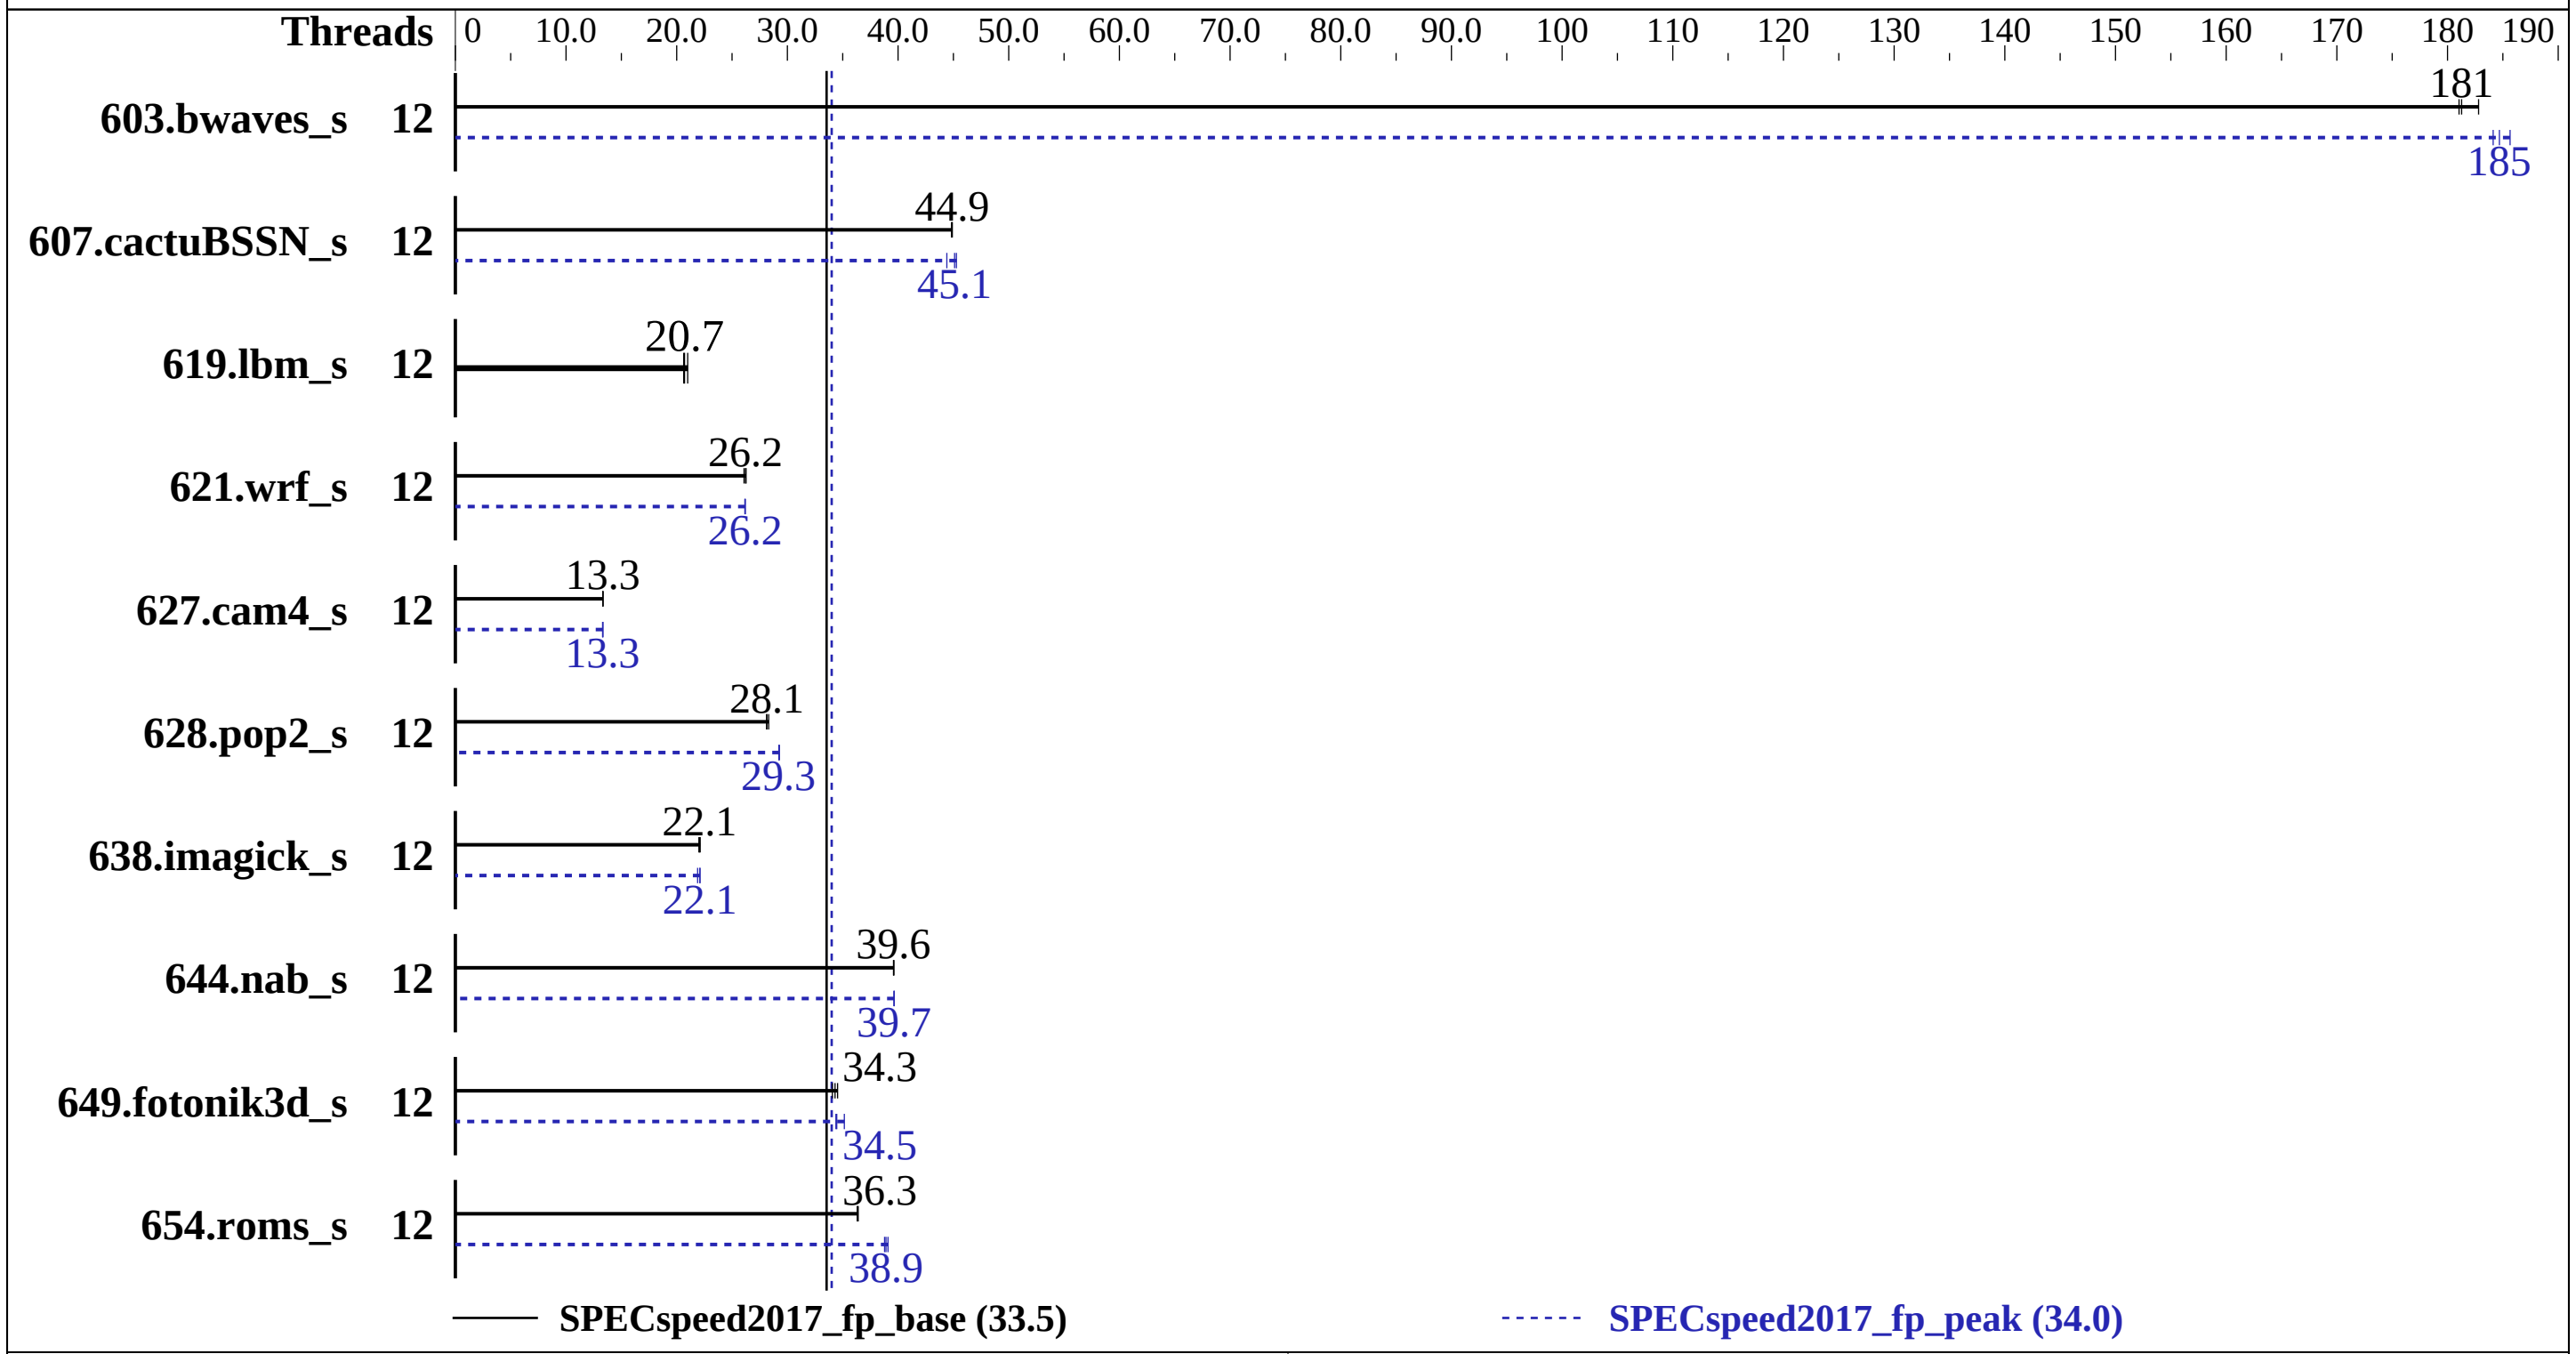

Hardware

CPU Name:	Intel Xeon Bronze 3104
Max MHz.:	1700
Nominal:	1700
Enabled:	12 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	8.25 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2133)
Storage:	1 x 200 GB SATA III SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) Kernel 4.4.114-94.11-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Supermicro BIOS version 2.0b released Feb-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator library V5.0.1

SPEC CPU2017 Floating Point Speed Result

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Bronze 3104)

SPECspeed2017_fp_base = 33.5

SPECspeed2017_fp_peak = 34.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro
Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	12	326	181	**325**	**181**	323	183	12	320	184	**319**	**185**	318	186
607.cactuBSSN_s	12	372	44.8	**371**	**44.9**	371	44.9	12	368	45.3	**370**	**45.1**	375	44.4
619.lbm_s	12	254	20.6	**253**	**20.7**	250	21.0	12	254	20.6	**253**	**20.7**	250	21.0
621.wrf_s	12	**505**	**26.2**	504	26.3	507	26.1	12	505	26.2	**505**	**26.2**	506	26.2
627.cam4_s	12	**665**	**13.3**	664	13.3	665	13.3	12	665	13.3	666	13.3	**666**	**13.3**
628.pop2_s	12	422	28.1	**422**	**28.1**	419	28.3	12	406	29.3	**406**	**29.3**	406	29.2
638.imagick_s	12	652	22.1	655	22.0	**654**	**22.1**	12	**653**	**22.1**	653	22.1	659	21.9
644.nab_s	12	441	39.6	441	39.6	**441**	**39.6**	12	441	39.6	441	39.7	**441**	**39.7**
649.fotonik3d_s	12	268	34.1	264	34.5	**266**	**34.3**	12	265	34.4	**265**	**34.5**	259	35.1
654.roms_s	12	434	36.3	**433**	**36.3**	433	36.4	12	406	38.8	403	39.1	**405**	**38.9**

SPECspeed2017_fp_base = 33.5

SPECspeed2017_fp_peak = 34.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches

 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
 jemalloc: sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
LLC prefetch = Enable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
Hardware P-state = Out of Band Mode
XPT Prefetch = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-52ma Sun Aug 19 00:06:23 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
      2  "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 6
      siblings  : 6
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                12
     On-line CPU(s) list:   0-11
     Thread(s) per core:    1
     Core(s) per socket:    6
     Socket(s):             2
     NUMA node(s):          2
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
     Stepping:              4
     CPU MHz:               800.000
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU max MHz:           1700.0000
      CPU min MHz:           800.0000
      BogoMIPS:              3400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              8448K
      NUMA node0 CPU(s):     0-5
      NUMA node1 CPU(s):     6-11
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

 /proc/cpuinfo cache data
    cache size : 8448 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 2 nodes (0-1)
   node 0 cpus: 0 1 2 3 4 5
   node 0 size: 193039 MB
   node 0 free: 179074 MB
   node 1 cpus: 6 7 8 9 10 11
   node 1 size: 193518 MB
   node 1 free: 183093 MB
   node distances:
   node   0   1
     0:  10  21
     1:  21  10

 From /proc/meminfo
    MemTotal:       395834844 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
```

(Continued on next page)

Platform Notes (Continued)

```
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-52ma 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Aug 17 11:35

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   145G   33G  112G  23% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 2.0b 02/24/2018
   Memory:
    12x NO DIMM NO DIMM
    12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2133

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   619.lbm_s(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   607.cactuBSSN_s(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
CC   621.wrf_s(peak) 628.pop2_s(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Supermicro
SuperServer 6029U-TR4 (X11DPU , Intel Xeon Bronze 3104)

SPECspeed2017_fp_base = 33.5
SPECspeed2017_fp_peak = 34.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro
Test Date: Aug-2018
Hardware Availability: Jul-2017
Software Availability: Feb-2018

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Bronze 3104)

SPECspeed2017_fp_base = 33.5

SPECspeed2017_fp_peak = 34.0

CPU2017 License:	001176	**Test Date:**	Aug-2018
Test Sponsor:	Supermicro	**Hardware Availability:**	Jul-2017
Tested by:	Supermicro	**Software Availability:**	Feb-2018

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml

Tested with SPEC CPU2017 v1.0.2 on 2018-08-18 12:06:22-0400.
Report generated on 2018-10-31 18:20:51 by CPU2017 PS formatter v6067.
Originally published on 2018-09-04.