# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850
(3.20 GHz, Intel Xeon Gold 6146)

SPECspeed2017_int_base = 9.74

SPECspeed2017_int_peak = 9.91

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2018
**Hardware Availability:** Aug-2017
**Software Availability:** May-2018

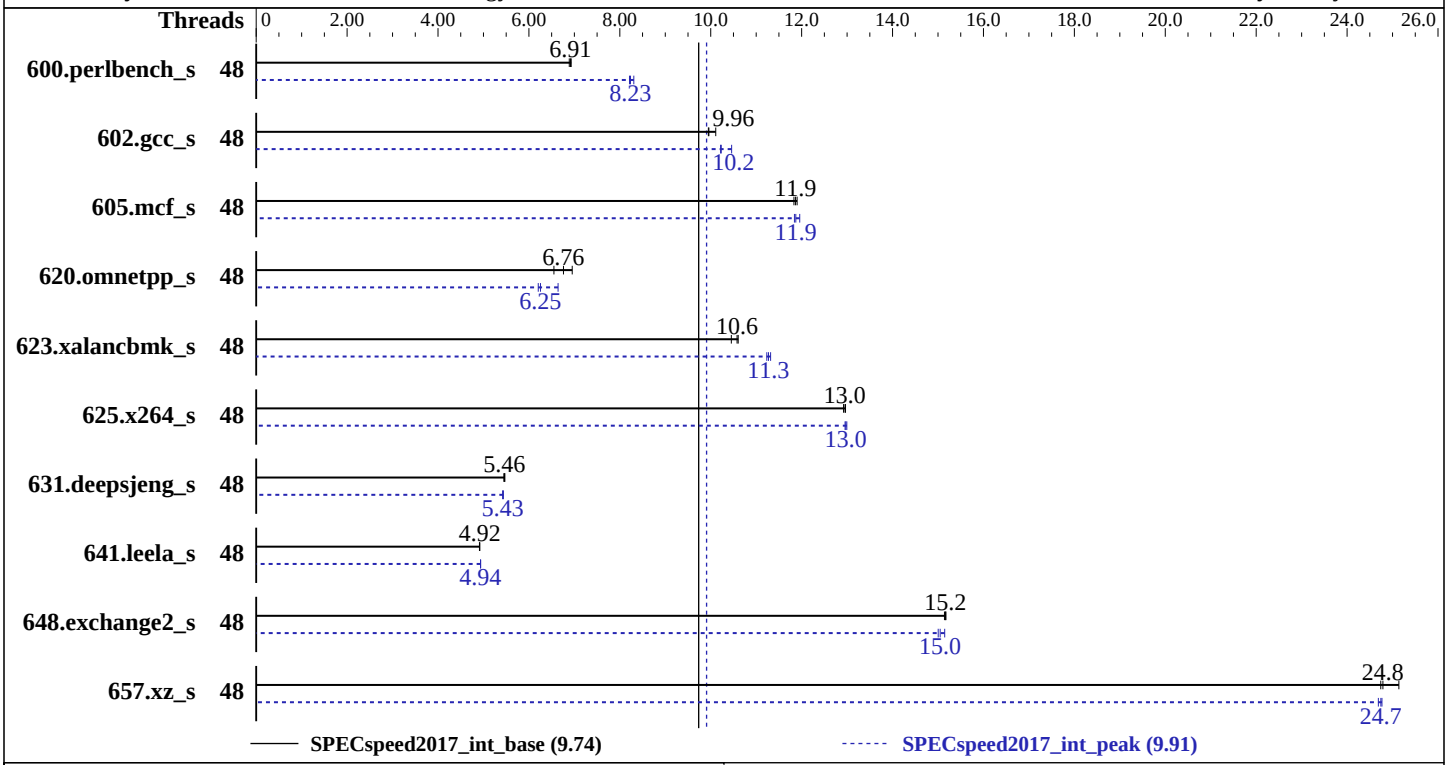


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6146 |
| Max MHz.: | 4200 |
| Nominal: | 3200 |
| Enabled: | 48 cores, 4 chips |
| Orderable: | 2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 24.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R) |
| Storage: | 1 x 800 GB SAS SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.121-92.80-default |
| Compiler: | C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Lenovo BIOS Version TEE123N 1.40 released Jun-2018 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc: jemalloc memory allocator library V5.0.1 |

# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850
(3.20 GHz, Intel Xeon Gold 6146)

SPECspeed2017_int_base = 9.74

SPECspeed2017_int_peak = 9.91

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2018
**Hardware Availability:** Aug-2017
**Software Availability:** May-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 48 | **257** | **6.91** | 256 | 6.93 | 258 | 6.89 | 48 | **216** | **8.23** | 216 | 8.21 | 214 | 8.31 |
| 602.gcc_s | 48 | 400 | 9.95 | 394 | 10.1 | **400** | **9.96** | 48 | **389** | **10.2** | 381 | 10.5 | 390 | 10.2 |
| 605.mcf_s | 48 | 399 | 11.8 | **398** | **11.9** | 397 | 11.9 | 48 | **398** | **11.9** | 399 | 11.8 | 395 | 12.0 |
| 620.omnetpp_s | 48 | **241** | **6.76** | 249 | 6.55 | 235 | 6.95 | 48 | 246 | 6.64 | **261** | **6.25** | 263 | 6.21 |
| 623.xalancbmk_s | 48 | **134** | **10.6** | 136 | 10.5 | 134 | 10.6 | 48 | 126 | 11.2 | 125 | 11.3 | **126** | **11.3** |
| 625.x264_s | 48 | **136** | **13.0** | 137 | 12.9 | 136 | 13.0 | 48 | 136 | 13.0 | **136** | **13.0** | 136 | 13.0 |
| 631.deepsjeng_s | 48 | **262** | **5.46** | 263 | 5.45 | 262 | 5.47 | 48 | **264** | **5.43** | 264 | 5.44 | 264 | 5.42 |
| 641.leela_s | 48 | **347** | **4.92** | 347 | 4.92 | 347 | 4.91 | 48 | **346** | **4.94** | 346 | 4.94 | 345 | 4.94 |
| 648.exchange2_s | 48 | **194** | **15.2** | 194 | 15.2 | 194 | 15.1 | 48 | 196 | 15.0 | **195** | **15.0** | 194 | 15.1 |
| 657.xz_s | 48 | 246 | 25.1 | **249** | **24.8** | 250 | 24.7 | 48 | **250** | **24.7** | 250 | 24.7 | 250 | 24.8 |

**SPECspeed2017_int_base = 9.74**

**SPECspeed2017_int_peak = 9.91**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Custom Mode
CPU P-state Control set to None
Page Policy set to Adaptive
C-States set to Legacy
Energy Efficient Turbo set to Disable
Platform Controlled Type set to Maximum Performance
Hyper-Threading set to Disable
DCU Streamer Prefetcher set to Disable
Trusted Execution Technology set to Enable
DCA set to Enable
LLC dead line alloc set to Enable
Stale A to S set to Enable
 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on Electron-node-01 Tue Aug  7 10:27:29 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
       4  "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 12
       siblings  : 12
       physical 0: cores 0 1 2 3 9 10 16 18 19 24 26 27
       physical 1: cores 0 1 3 9 10 16 18 19 24 25 26 27
       physical 2: cores 0 1 2 3 8 9 10 11 18 19 24 27
       physical 3: cores 0 1 2 3 4 9 10 16 18 19 25 26

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                48
      On-line CPU(s) list:   0-47
      Thread(s) per core:    1
      Core(s) per socket:    12
      Socket(s):             4
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Model name:            Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
      Stepping:              4
      CPU MHz:               3192.517
      BogoMIPS:              6385.03
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              25344K
      NUMA node0 CPU(s):     0-11
      NUMA node1 CPU(s):     12-23
      NUMA node2 CPU(s):     24-35
      NUMA node3 CPU(s):     36-47
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp ssbd retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
    node 0 size: 386656 MB
    node 0 free: 386311 MB
    node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
    node 1 size: 387055 MB
    node 1 free: 386778 MB
    node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35
    node 2 size: 387055 MB
    node 2 free: 386799 MB
    node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47
    node 3 size: 387052 MB
    node 3 free: 386777 MB
    node distances:
    node   0   1   2   3
      0:  10  21  21  31
      1:  21  10  31  21
      2:  21  31  10  21
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     3:  31  21  21  10

From /proc/meminfo
   MemTotal:       1584967644 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux Electron-node-01 4.4.121-92.80-default #1 SMP Mon May 21 14:40:10 UTC 2018
   (2afdd00) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 7 10:22

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   688G  138G  551G  20% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[TEE123N-1.40]- 06/12/2018
  Memory:
   48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
      peak) 657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
     641.leela_s(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base, peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

## Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

**(Continued on next page)**

## Base Other Flags (Continued)

Fortran benchmarks:
-m64

## Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

## Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp

**(Continued on next page)**

## Peak Optimization Flags (Continued)

602.gcc_s (continued):
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks (except as noted below):
-m64

**(Continued on next page)**

## Peak Other Flags (Continued)

623.xalancbmk_s: `-m32`

Fortran benchmarks:
`-m64`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml`


SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-06 22:27:28-0400.
Report generated on 2018-10-31 18:22:21 by CPU2017 PS formatter v6067.
Originally published on 2018-09-04.