



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

**SPECrate2017\_fp\_base = 452**

**SPECrate2017\_fp\_peak = 461**

CPU2017 License: 9017


Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

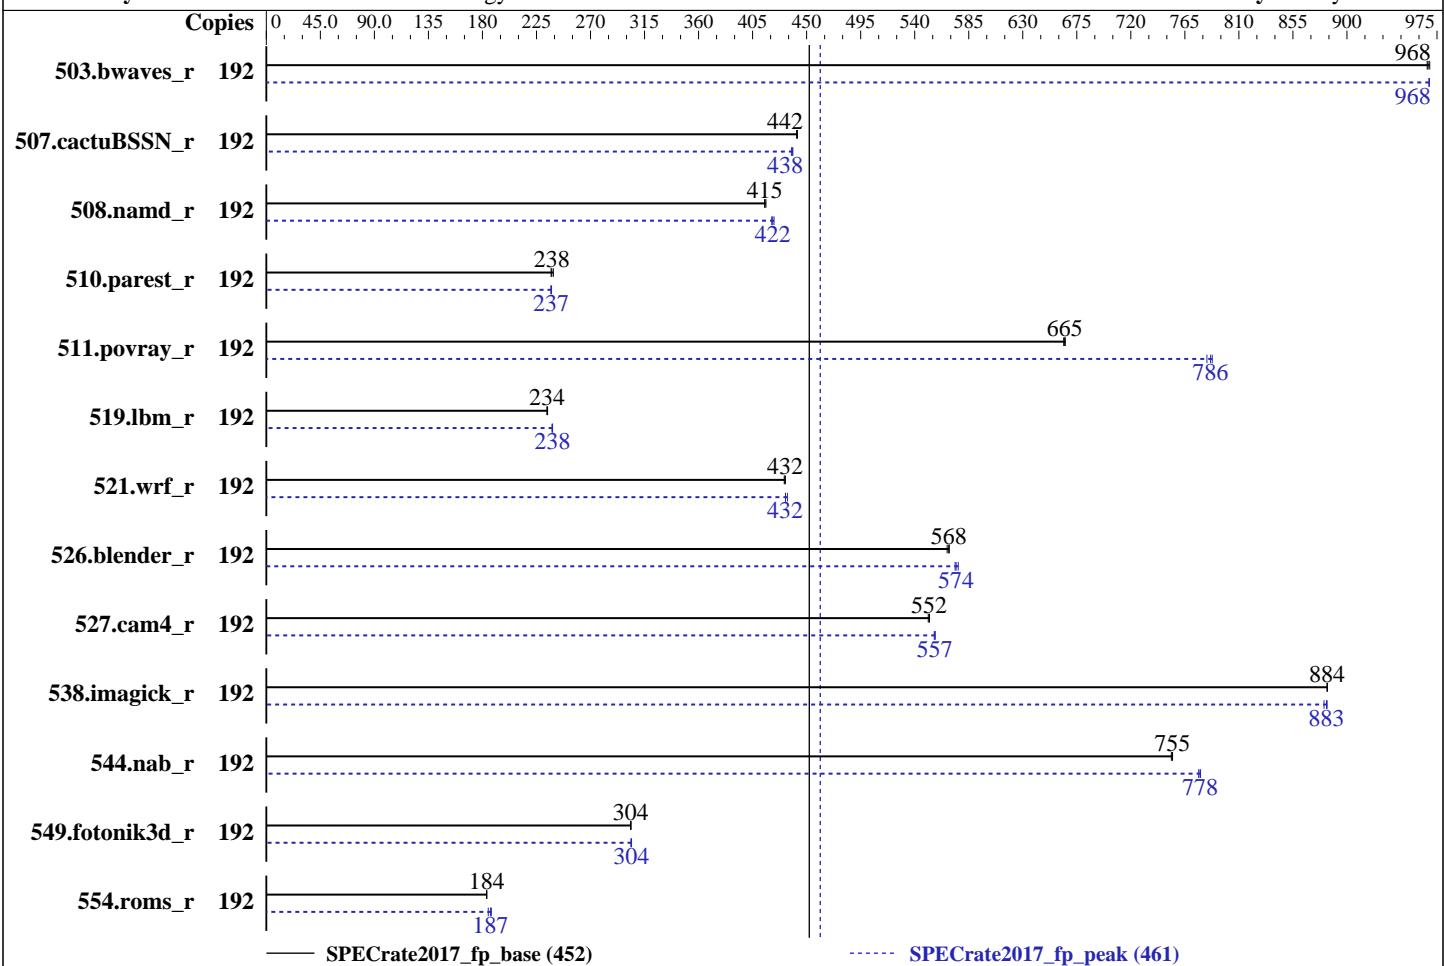

— SPECrate2017\_fp\_base (452)

---- SPECrate2017\_fp\_peak (461)

### Hardware

CPU Name: Intel Xeon Platinum 8168  
Max MHz.: 3700  
Nominal: 2700  
Enabled: 96 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 33 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 800 GB SAS SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Compiler: Kernel 3.10.0-693.25.7.el7.x86\_64  
C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Lenovo BIOS Version TEE123N 1.40 released Jun-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

**SPECrate2017\_fp\_base = 452**

**SPECrate2017\_fp\_peak = 461**

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	<b>1990</b>	<b>968</b>	1991	967	1987	969	192	<b>1988</b>	<b>968</b>	1988	968	1988	969		
507.cactusBSSN_r	192	550	442	<b>550</b>	<b>442</b>	550	442	192	<b>556</b>	<b>437</b>	554	439	<b>555</b>	<b>438</b>		
508.namd_r	192	438	416	<b>439</b>	<b>415</b>	439	415	192	<b>433</b>	<b>421</b>	431	423	<b>432</b>	<b>422</b>		
510.parest_r	192	<b>2113</b>	<b>238</b>	2118	237	2101	239	192	2114	238	2119	237	<b>2117</b>	<b>237</b>		
511.povray_r	192	675	664	<b>674</b>	<b>665</b>	674	665	192	<b>570</b>	<b>786</b>	572	783	569	788		
519.lbm_r	192	864	234	865	234	<b>865</b>	<b>234</b>	192	<b>851</b>	<b>238</b>	849	238	<b>849</b>	<b>238</b>		
521.wrf_r	192	<b>995</b>	<b>432</b>	995	432	997	431	192	991	434	995	432	<b>995</b>	<b>432</b>		
526.blender_r	192	516	567	<b>515</b>	<b>568</b>	514	569	192	<b>509</b>	<b>574</b>	510	574	507	576		
527.cam4_r	192	608	552	609	551	<b>608</b>	<b>552</b>	192	604	556	<b>603</b>	<b>557</b>	603	557		
538.imagick_r	192	<b>540</b>	<b>884</b>	540	884	540	884	192	540	883	<b>541</b>	<b>883</b>	542	881		
544.nab_r	192	429	754	428	755	<b>428</b>	<b>755</b>	192	416	776	<b>416</b>	<b>778</b>	415	778		
549.fotonik3d_r	192	2465	303	2464	304	<b>2465</b>	<b>304</b>	192	2460	304	<b>2460</b>	<b>304</b>	2464	304		
554.roms_r	192	1664	183	1661	184	<b>1662</b>	<b>184</b>	192	1628	187	<b>1633</b>	<b>187</b>	1650	185		

**SPECrate2017\_fp\_base = 452**

**SPECrate2017\_fp\_peak = 461**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode

CPU P-state Control set to None

Page Policy set to Adaptive

C-States set to Legacy

Energy Efficient Turbo set to Disable

Platform Controlled Type set to Maximum Performance

DCU Streamer Prefetcher set to Disable

DCU IP Prefetcher set to Disable

SNC set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on SR860 Sun Aug 5 08:54:31 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz  
4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

Thread(s) per core: 2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

**SPECrate2017\_fp\_base = 452**

**SPECrate2017\_fp\_peak = 461**

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Platform Notes (Continued)

```

Core(s) per socket:      24
Socket(s):              4
NUMA node(s):           8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping:                4
CPU MHz:                2700.000
BogoMIPS:               5400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                33792K
NUMA node0 CPU(s):      0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
NUMA node1 CPU(s):      3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
NUMA node2 CPU(s):      24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
NUMA node3 CPU(s):      27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
NUMA node4 CPU(s):      48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
NUMA node5 CPU(s):      51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
NUMA node6 CPU(s):      72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
NUMA node7 CPU(s):      75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_13 cdp_13 invpcid_single
intel_pt tpr_shadow vnumi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts spec_ctrl
intel_stibp ssbd

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
node 0 size: 97981 MB
node 0 free: 95290 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118
119
node 1 size: 98304 MB
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Platform Notes (Continued)

```
node 1 free: 95812 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 98304 MB
node 2 free: 95832 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 98304 MB
node 3 free: 95789 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 98304 MB
node 4 free: 95801 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 98304 MB
node 5 free: 95801 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 98304 MB
node 6 free: 95801 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 98304 MB
node 7 free: 95794 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  31  31
  1: 11  10  21  21  21  21  31  31
  2: 21  21  10  11  31  31  21  21
  3: 21  21  11  10  31  31  21  21
  4: 21  21  31  31  10  11  21  21
  5: 21  21  31  31  11  10  21  21
  6: 31  31  21  21  21  21  10  11
  7: 31  31  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      792250408 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Platform Notes (Continued)

```
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux SR860 3.10.0-693.25.7.el7.x86_64 #1 SMP Sat May 19 04:36:04 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Aug 4 23:12

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb4        xfs   686G  154G  532G  23%  /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE123N-1.40]- 06/12/2018
Memory:
 48x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(peak) 510.parest\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(peak) 526.blender\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

FC 554.roms\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

**SPECrate2017\_fp\_base = 452**

**SPECrate2017\_fp\_peak = 461**

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Date: Aug-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

SPECrate2017\_fp\_base = 452

SPECrate2017\_fp\_peak = 461

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

## Peak Optimization Flags (Continued)

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-H.html>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860  
(2.70 GHz, Intel Xeon Platinum 8168)

**SPECrate2017\_fp\_base = 452**

**SPECrate2017\_fp\_peak = 461**

**CPU2017 License:** 9017

**Test Date:** Aug-2018

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-08-04 20:54:30-0400.

Report generated on 2018-10-31 18:16:58 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.