SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017_int_base = 119

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

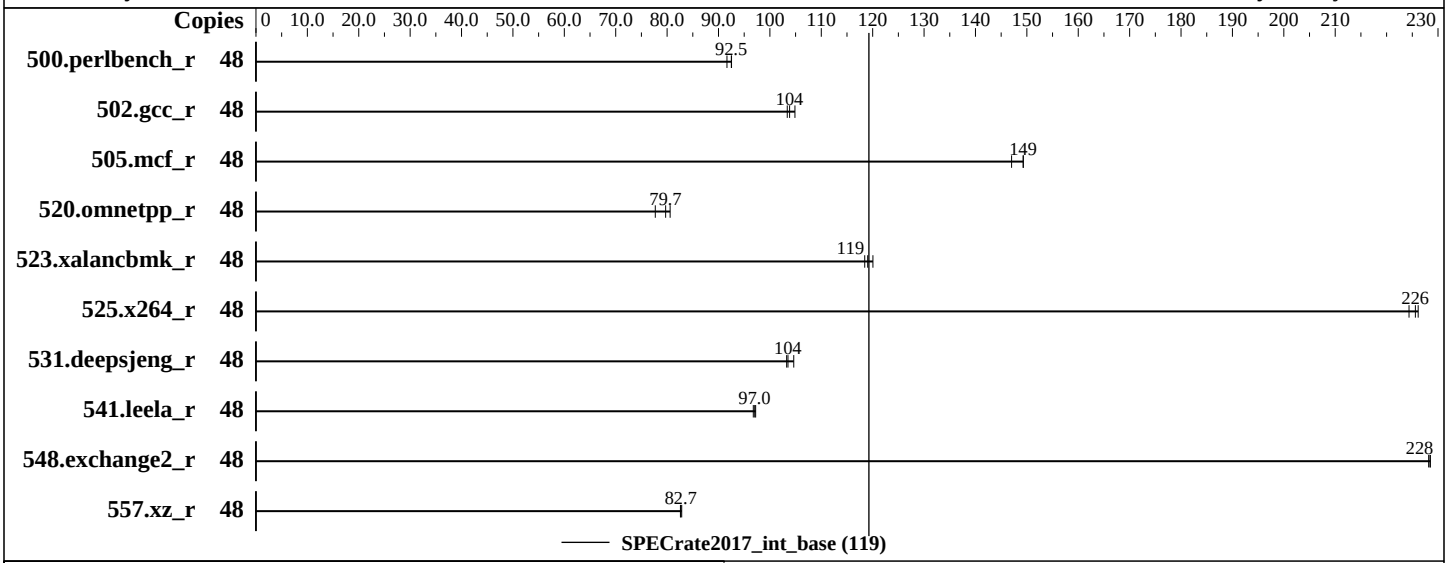

Hardware

CPU Name:	Intel Xeon Gold 5118
Max MHz.:	3200
Nominal:	2300
Enabled:	24 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	16.5 MB I+D on chip per chip
Other:	None
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage:	2 x 400 GB SATA SSD, RAID 1
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.131-94.25-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	HPE BIOS Version U30 06/15/2018 released Jun-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc general purpose malloc implementation v5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL380 Gen10
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017_int_base = 119

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	834	91.6	826	92.5	**826**	**92.5**							
502.gcc_r	48	648	105	**655**	**104**	657	103							
505.mcf_r	48	520	149	528	147	**520**	**149**							
520.omnetpp_r	48	781	80.6	**790**	**79.7**	810	77.7							
523.xalancbmk_r	48	422	120	**426**	**119**	428	118							
525.x264_r	48	372	226	375	224	**373**	**226**							
531.deepsjeng_r	48	526	105	**531**	**104**	533	103							
541.leela_r	48	821	96.8	818	97.2	**819**	**97.0**							
548.exchange2_r	48	550	229	**551**	**228**	551	228							
557.xz_r	48	626	82.8	628	82.6	**627**	**82.7**							

SPECrate2017_int_base = 119

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using  "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Stale A to S set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
  Minimum Processor Idle Power Core C-State set to C1E State
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-wszc Mon Aug 20 03:01:49 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
       2  "physical id"s (chips)
       48 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 12
       siblings  : 24
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                48
      On-line CPU(s) list:   0-47
      Thread(s) per core:    2
```

(Continued on next page)

Platform Notes (Continued)

```
      Core(s) per socket:    12
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
      Stepping:              4
      CPU MHz:               2294.634
      BogoMIPS:              4589.26
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              16896K
      NUMA node0 CPU(s):     0-5,24-29
      NUMA node1 CPU(s):     6-11,30-35
      NUMA node2 CPU(s):     12-17,36-41
      NUMA node3 CPU(s):     18-23,42-47
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

  /proc/cpuinfo cache data
     cache size : 16896 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
    node 0 size: 47882 MB
    node 0 free: 47616 MB
    node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
    node 1 size: 48382 MB
    node 1 free: 48131 MB
    node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
    node 2 size: 48382 MB
    node 2 free: 48254 MB
    node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
    node 3 size: 48263 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 free: 48137 MB
  node distances:
  node   0   1   2   3
    0:  10  21  31  31
    1:  21  10  31  31
    2:  31  31  10  21
    3:  31  31  21  10

From /proc/meminfo
   MemTotal:       197539116 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 3
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-wszc 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Aug 20 02:54

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   331G   30G  302G   9% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
```

(Continued on next page)

Platform Notes (Continued)

```
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE U30 06/15/2018
   Memory:
    24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2400

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-20 03:01:48-0400.
Report generated on 2018-10-31 18:39:30 by CPU2017 PS formatter v6067.
Originally published on 2018-09-18.