# SPEC® CPU2017 Floating Point Rate Result



## Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECrate2017_fp_base = 435

SPECrate2017_fp_peak = Not Run

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE
**Test Date:** Aug-2018
**Hardware Availability:** Jun-2018
**Software Availability:** May-2018

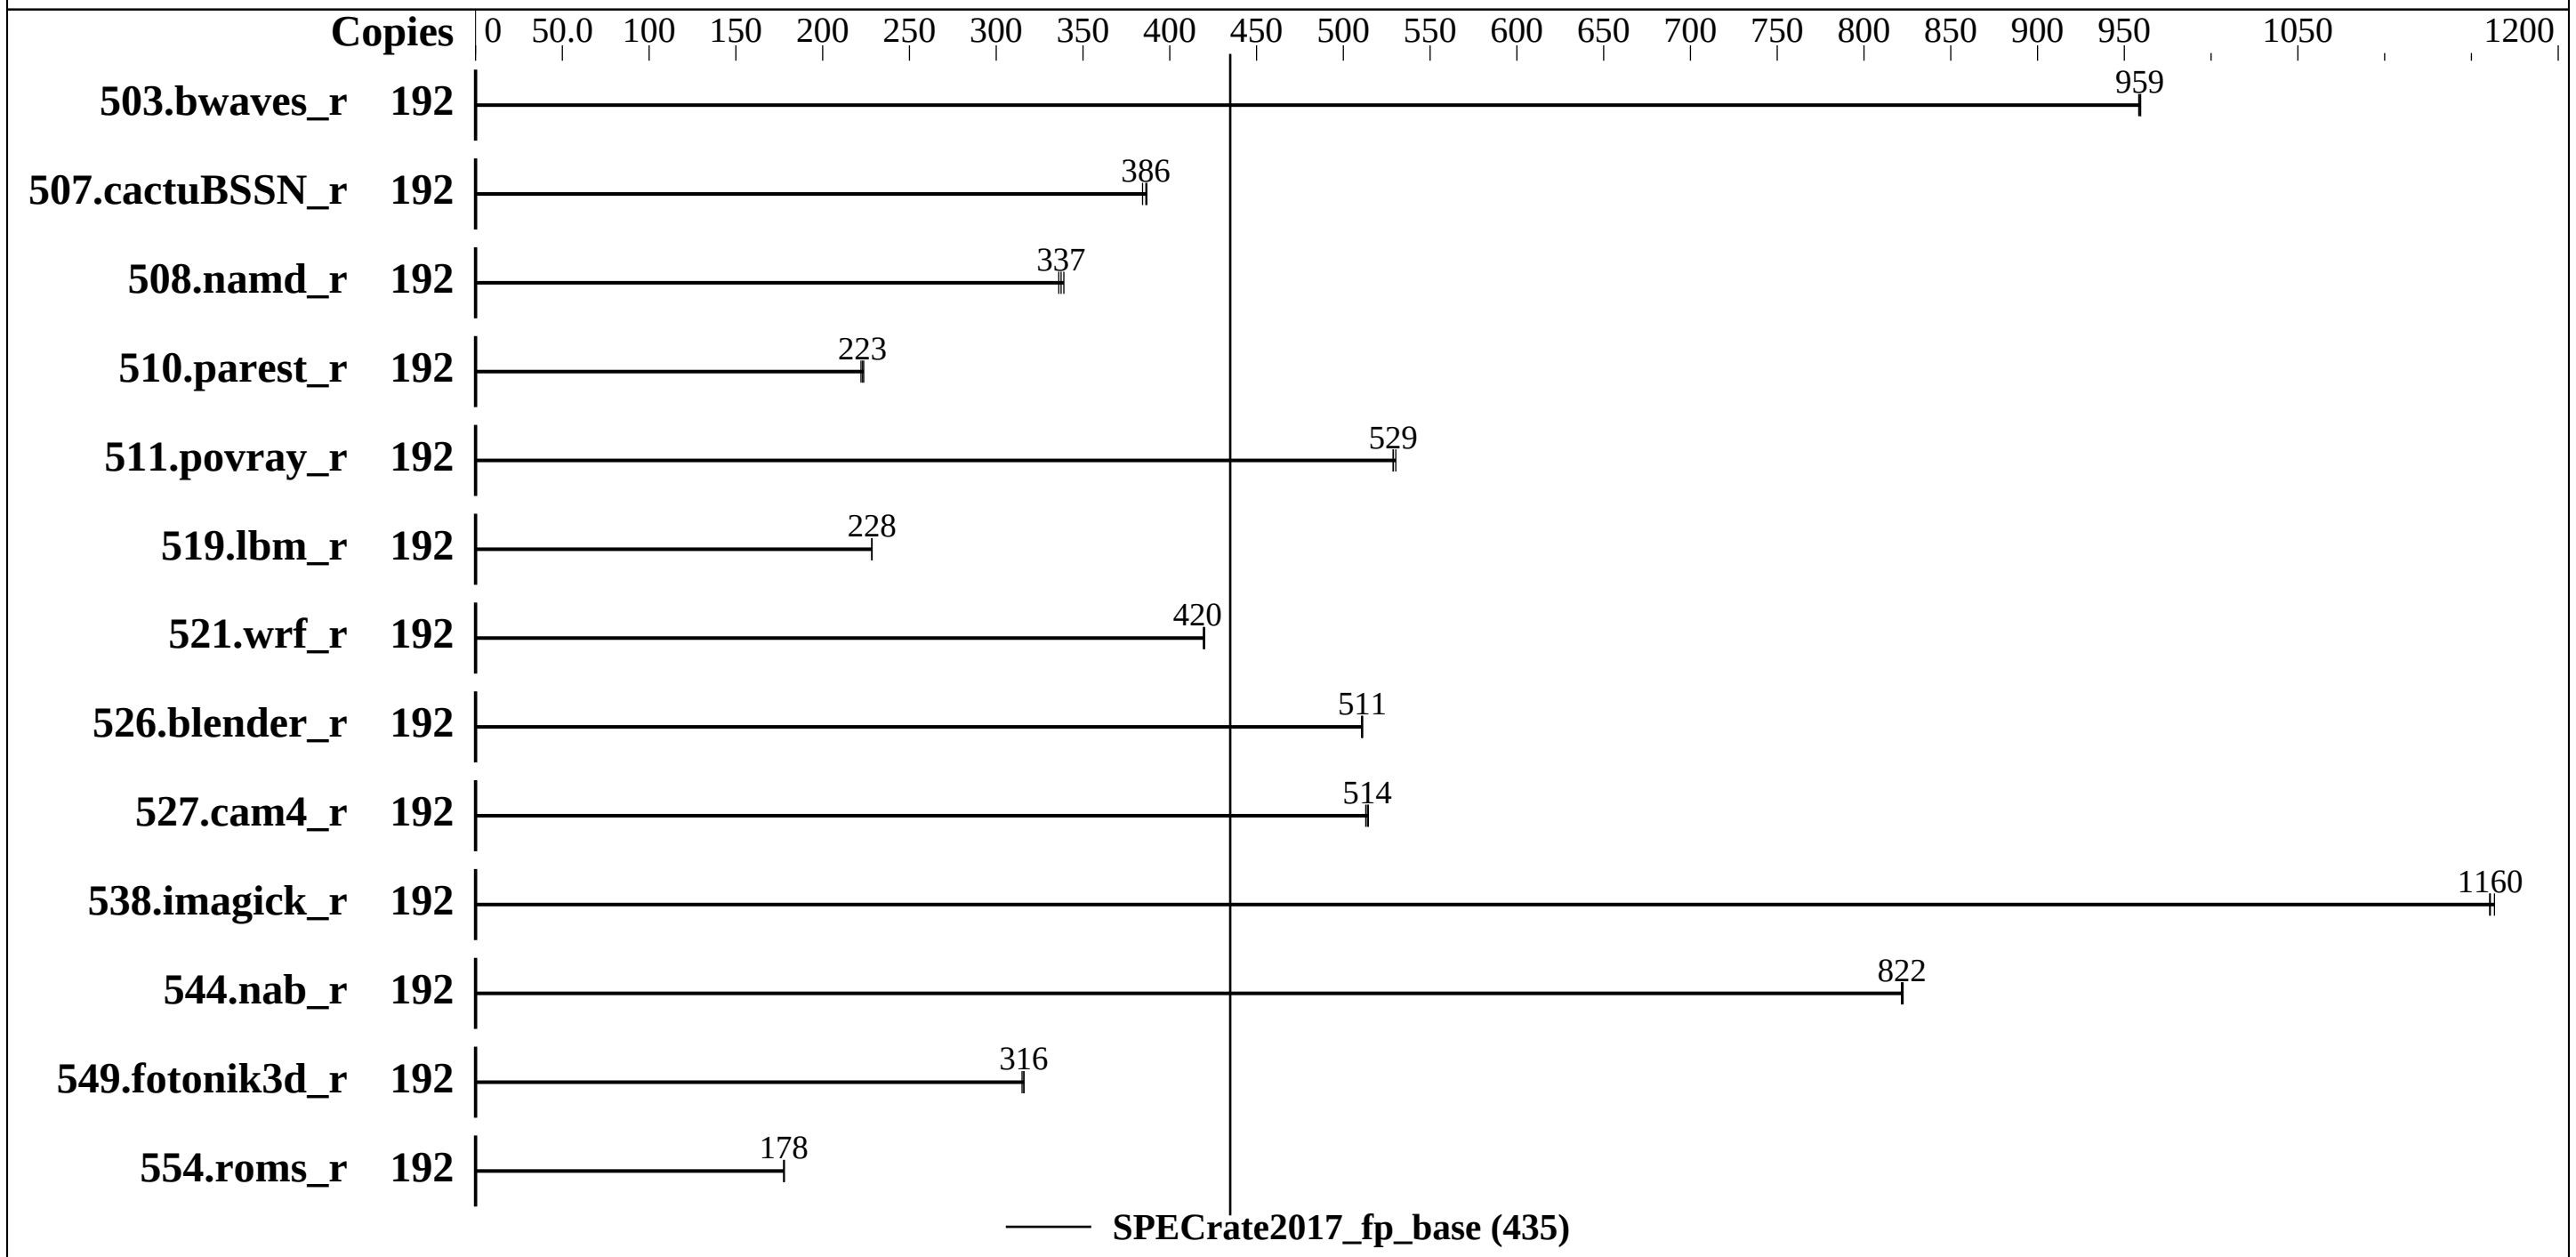


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8160 |
| Max MHz.: | 3700 |
| Nominal: | 2100 |
| Enabled: | 96 cores, 4 chips, 2 threads/core |
| Orderable: | 1, 2, 4 chip(s) |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 33 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R) |
| Storage: | 1 x 900 GB SATA SSD, RAID 0 |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 (x86_64) SP3<br>Kernel 4.4.132-94.33-default |
| Compiler: | C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | HPE BIOS Version U34 06/15/2018 released Jun-2018 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | None |

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(2.10 GHz, Intel Xeon Platinum 8160)

SPECrate2017_fp_base = 435

SPECrate2017_fp_peak = Not Run

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE
**Test Date:** Aug-2018
**Hardware Availability:** Jun-2018
**Software Availability:** May-2018

## Results Table

| | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Benchmark** | **Copies** | **Seconds** | **Ratio** | **Seconds** | **Ratio** | **Seconds** | **Ratio** | **Copies** | **Seconds** | **Ratio** | **Seconds** | **Ratio** | **Seconds** | **Ratio** |
| 503.bwaves_r | 192 | 2009 | 958 | 2007 | 959 | **2008** | **959** | | | | | | | |
| 507.cactuBSSN_r | 192 | 632 | 384 | 628 | 387 | **629** | **386** | | | | | | | |
| 508.namd_r | 192 | 543 | 336 | **541** | **337** | 538 | 339 | | | | | | | |
| 510.parest_r | 192 | **2252** | **223** | 2262 | 222 | 2246 | 224 | | | | | | | |
| 511.povray_r | 192 | **848** | **529** | 848 | 529 | 846 | 530 | | | | | | | |
| 519.lbm_r | 192 | **886** | **228** | 886 | 228 | 886 | 228 | | | | | | | |
| 521.wrf_r | 192 | 1026 | 419 | 1024 | 420 | **1025** | **420** | | | | | | | |
| 526.blender_r | 192 | 572 | 511 | 573 | 510 | **572** | **511** | | | | | | | |
| 527.cam4_r | 192 | **654** | **514** | 655 | 513 | 653 | 514 | | | | | | | |
| 538.imagick_r | 192 | 410 | 1160 | **411** | **1160** | 411 | 1160 | | | | | | | |
| 544.nab_r | 192 | 393 | 823 | 393 | 822 | **393** | **822** | | | | | | | |
| 549.fotonik3d_r | 192 | 2376 | 315 | 2368 | 316 | **2369** | **316** | | | | | | | |
| 554.roms_r | 192 | 1719 | 178 | **1717** | **178** | 1714 | 178 | | | | | | | |

**SPECrate2017_fp_base =** **435**

**SPECrate2017_fp_peak =** **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using  "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

**(Continued on next page)**

## General Notes (Continued)

```
 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 BIOS Configuration:
  Workload Profile set to General Throughput Compute
  Memory Patrol Scrubbing set to Disabled
  LLC Prefetch set to Enabled
  LLC Dead Line Allocation set to Disabled
  Stale A to S set to Enabled
  Minimum Processor Idle Power Core C-State set to C1E State
  Thermal Configuration set to Maximum Cooling
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-5mn8 Wed Aug  8 00:02:59 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
       4  "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 2: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 3: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                192
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      On-line CPU(s) list:   0-191
      Thread(s) per core:    2
      Core(s) per socket:    24
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
      Stepping:              4
      CPU MHz:               2095.094
      BogoMIPS:              4190.18
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              33792K
      NUMA node0 CPU(s):     0-11,96-107
      NUMA node1 CPU(s):     12-23,108-119
      NUMA node2 CPU(s):     24-35,120-131
      NUMA node3 CPU(s):     36-47,132-143
      NUMA node4 CPU(s):     48-59,144-155
      NUMA node5 CPU(s):     60-71,156-167
      NUMA node6 CPU(s):     72-83,168-179
      NUMA node7 CPU(s):     84-95,180-191
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

 /proc/cpuinfo cache data
    cache size : 33792 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 96 97 98 99 100 101 102 103 104 105 106 107
   node 0 size: 193102 MB
   node 0 free: 192833 MB
   node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 108 109 110 111 112 113 114 115 116
   117 118 119
```

(Continued on next page)

## Platform Notes (Continued)

```
    node 1 size: 193532 MB
    node 1 free: 193283 MB
    node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 120 121 122 123 124 125 126 127 128
    129 130 131
    node 2 size: 193532 MB
    node 2 free: 193366 MB
    node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 132 133 134 135 136 137 138 139 140
    141 142 143
    node 3 size: 193532 MB
    node 3 free: 193356 MB
    node 4 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 144 145 146 147 148 149 150 151 152
    153 154 155
    node 4 size: 193532 MB
    node 4 free: 193404 MB
    node 5 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 156 157 158 159 160 161 162 163 164
    165 166 167
    node 5 size: 193532 MB
    node 5 free: 193410 MB
    node 6 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 168 169 170 171 172 173 174 175 176
    177 178 179
    node 6 size: 193532 MB
    node 6 free: 193416 MB
    node 7 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 180 181 182 183 184 185 186 187 188
    189 190 191
    node 7 size: 193530 MB
    node 7 free: 193407 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  21  31  31  31  31  31  31
      1:  21  10  31  31  31  31  31  31
      2:  31  31  10  21  31  31  31  31
      3:  31  31  21  10  31  31  31  31
      4:  31  31  31  31  10  21  31  31
      5:  31  31  31  31  21  10  31  31
      6:  31  31  31  31  31  31  10  21
      7:  31  31  31  31  31  31  21  10

  From /proc/meminfo
     MemTotal:       1584974624 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 3
```

(Continued on next page)

## Platform Notes (Continued)

```
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP3"
      VERSION_ID="12.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-5mn8 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Aug 7 23:59

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   852G  102G  750G  12% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U34 06/15/2018
  Memory:
   48x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

## Compiler Version Notes (Continued)

```
==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

## Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`

**(Continued on next page)**

# Base Optimization Flags (Continued)

C++ benchmarks (continued):
`-qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs`

Benchmarks using both C and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml



Tested with SPEC CPU2017 v1.0.5 on 2018-08-08 00:02:58-0400.
Report generated on 2018-10-31 18:40:22 by CPU2017 PS formatter v6067.
Originally published on 2018-09-18.