SPEC® CPU2017 Integer Rate Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 422

SPECrate2017_int_peak = Not Run

CPU2017 License:	3	**Test Date:**	Aug-2018
Test Sponsor:	HPE	**Hardware Availability:**	Jun-2018
Tested by:	HPE	**Software Availability:**	May-2018

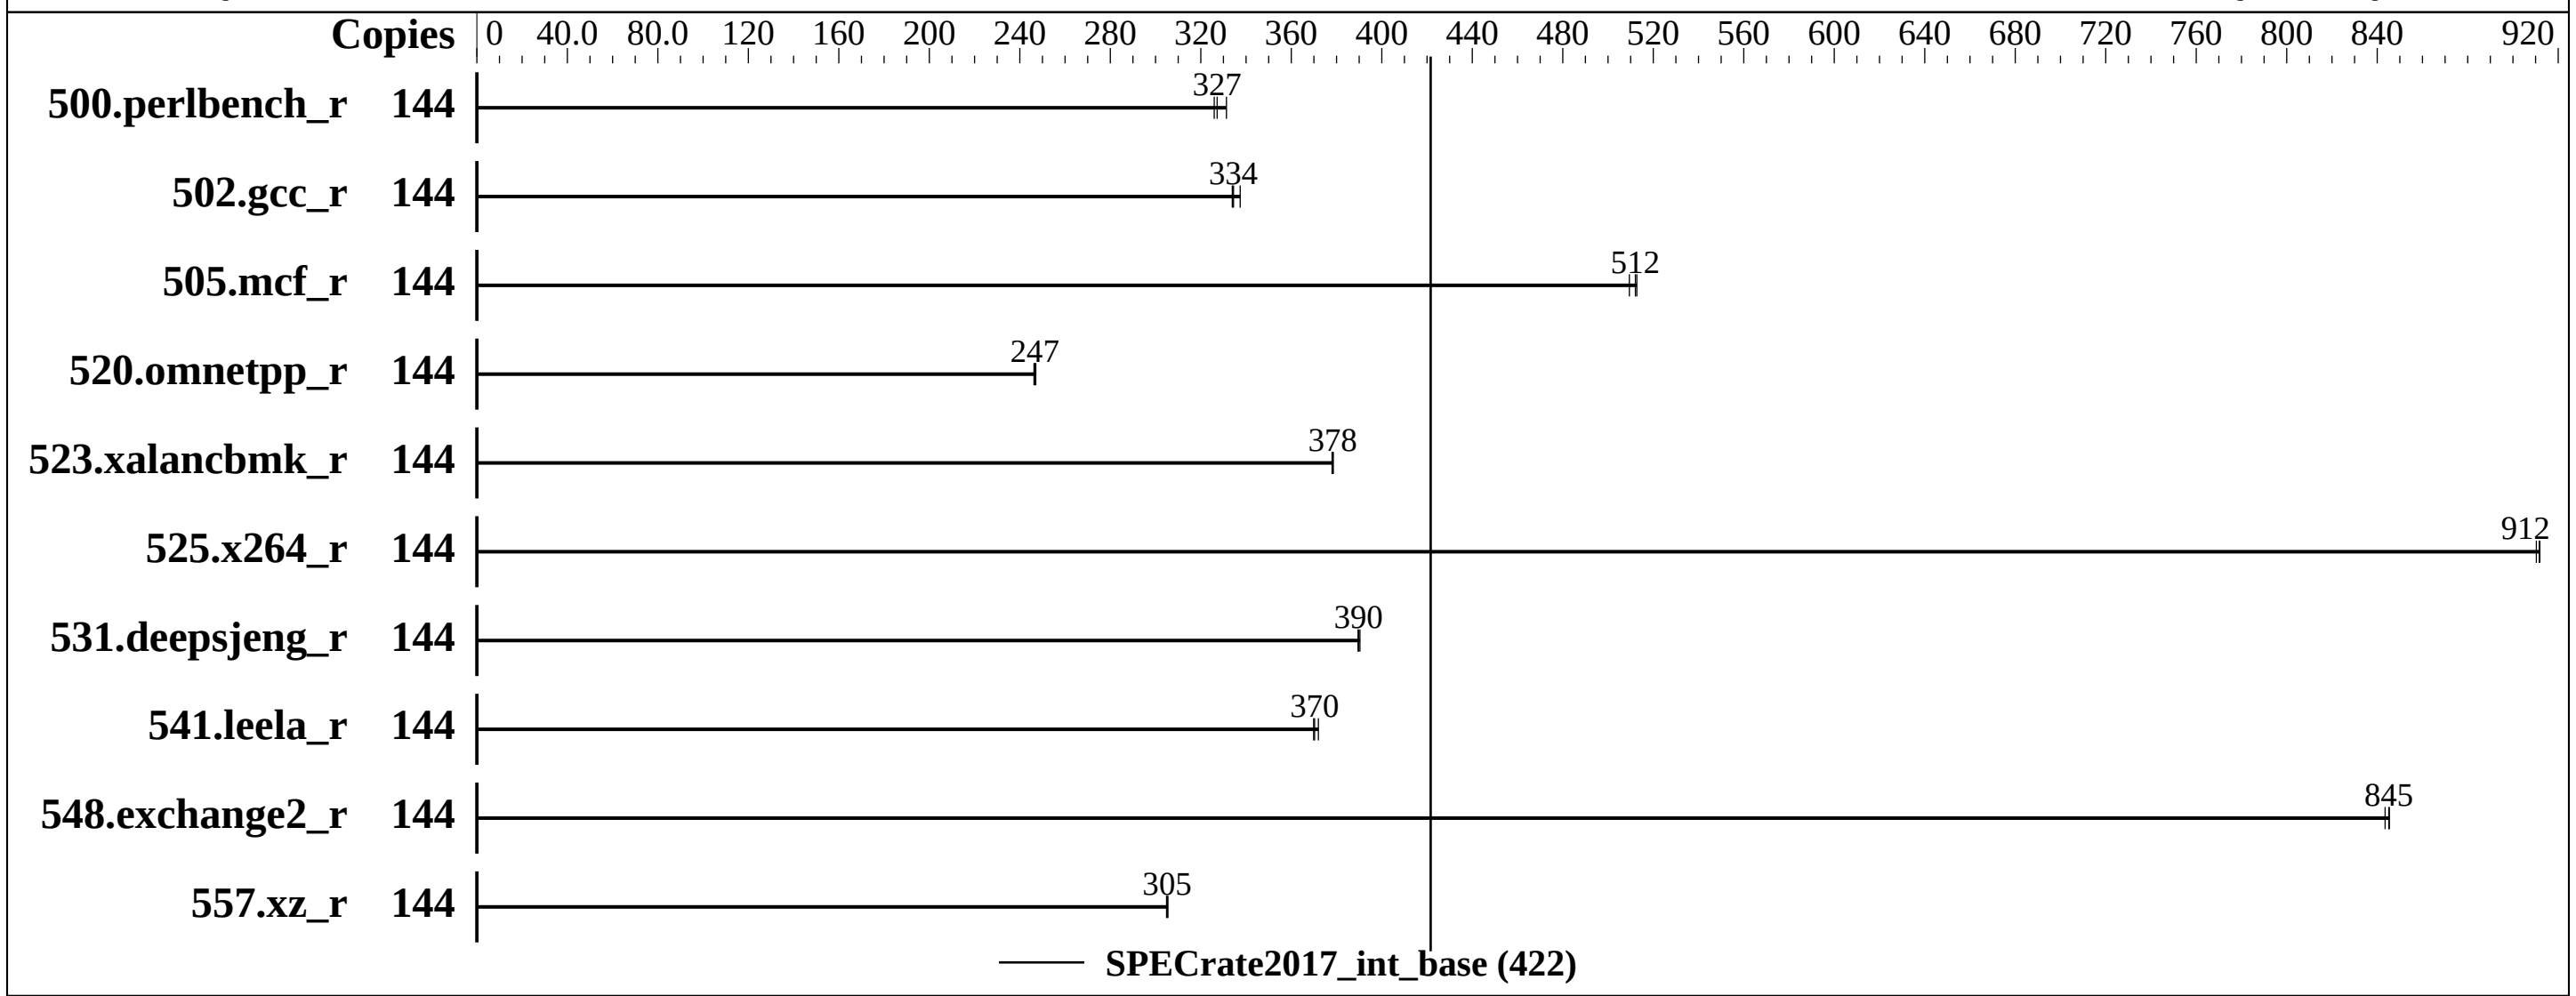

Hardware

CPU Name:	Intel Xeon Gold 6154
Max MHz.:	3700
Nominal:	3000
Enabled:	72 cores, 4 chips, 2 threads/core
Orderable:	1, 2, 4 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 900 GB SATA SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.132-94.33-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	HPE BIOS Version U34 06/15/2018 released Jun-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc general purpose malloc implementation v5.0.1

SPEC CPU2017 Integer Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 422

SPECrate2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE
Test Date: Aug-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
500.perlbench_r	144	692	331	**701**	**327**	703	326							
502.gcc_r	144	604	337	611	334	**610**	**334**							
505.mcf_r	144	**454**	**512**	454	513	457	509							
520.omnetpp_r	144	767	246	765	247	**766**	**247**							
523.xalancbmk_r	144	**402**	**378**	402	378	402	379							
525.x264_r	144	**277**	**912**	277	912	277	910							
531.deepsjeng_r	144	423	390	424	390	**423**	**390**							
541.leela_r	144	645	370	**644**	**370**	641	372							
548.exchange2_r	144	447	843	446	845	**446**	**845**							
557.xz_r	144	509	305	**510**	**305**	510	305							

SPECrate2017_int_base = **422**

SPECrate2017_int_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using  "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS Configuration:
  Workload Profile set to General Throughput Compute
  Memory Patrol Scrubbing set to Disabled
  LLC Prefetch set to Enabled
  LLC Dead Line Allocation set to Disabled
  Stale A to S set to Enabled
  Minimum Processor Idle Power Core C-State set to C1E State
  Thermal Configuration set to Maximum Cooling
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-5mn8 Mon Aug  6 02:06:07 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz
       4  "physical id"s (chips)
       144 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 18
       siblings  : 36
       physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 2: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 3: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                144
```

(Continued on next page)

Platform Notes (Continued)

```
    On-line CPU(s) list:   0-143
    Thread(s) per core:    2
    Core(s) per socket:    18
    Socket(s):             4
    NUMA node(s):          8
    Vendor ID:             GenuineIntel
    CPU family:            6
    Model:                 85
    Model name:            Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz
    Stepping:              4
    CPU MHz:               2992.987
    BogoMIPS:              5985.97
    Virtualization:        VT-x
    L1d cache:             32K
    L1i cache:             32K
    L2 cache:              1024K
    L3 cache:              25344K
    NUMA node0 CPU(s):     0-8,72-80
    NUMA node1 CPU(s):     9-17,81-89
    NUMA node2 CPU(s):     18-26,90-98
    NUMA node3 CPU(s):     27-35,99-107
    NUMA node4 CPU(s):     36-44,108-116
    NUMA node5 CPU(s):     45-53,117-125
    NUMA node6 CPU(s):     54-62,126-134
    NUMA node7 CPU(s):     63-71,135-143
    Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
    pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
    aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
    fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
    xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
    dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
    flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
    cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
    xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

/proc/cpuinfo cache data
   cache size : 25344 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 72 73 74 75 76 77 78 79 80
  node 0 size: 193103 MB
  node 0 free: 192808 MB
  node 1 cpus: 9 10 11 12 13 14 15 16 17 81 82 83 84 85 86 87 88 89
  node 1 size: 193533 MB
```

(Continued on next page)

Platform Notes (Continued)

```
    node 1 free: 193299 MB
    node 2 cpus: 18 19 20 21 22 23 24 25 26 90 91 92 93 94 95 96 97 98
    node 2 size: 193533 MB
    node 2 free: 193418 MB
    node 3 cpus: 27 28 29 30 31 32 33 34 35 99 100 101 102 103 104 105 106 107
    node 3 size: 193533 MB
    node 3 free: 193419 MB
    node 4 cpus: 36 37 38 39 40 41 42 43 44 108 109 110 111 112 113 114 115 116
    node 4 size: 193533 MB
    node 4 free: 193424 MB
    node 5 cpus: 45 46 47 48 49 50 51 52 53 117 118 119 120 121 122 123 124 125
    node 5 size: 193533 MB
    node 5 free: 193426 MB
    node 6 cpus: 54 55 56 57 58 59 60 61 62 126 127 128 129 130 131 132 133 134
    node 6 size: 193533 MB
    node 6 free: 193398 MB
    node 7 cpus: 63 64 65 66 67 68 69 70 71 135 136 137 138 139 140 141 142 143
    node 7 size: 193531 MB
    node 7 free: 193388 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  21  31  31  31  31  31  31
      1:  21  10  31  31  31  31  31  31
      2:  31  31  10  21  31  31  31  31
      3:  31  31  21  10  31  31  31  31
      4:  31  31  31  31  10  21  31  31
      5:  31  31  31  31  21  10  31  31
      6:  31  31  31  31  31  31  10  21
      7:  31  31  31  31  31  31  21  10

  From /proc/meminfo
     MemTotal:       1584981728 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 3
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP3"
        VERSION_ID="12.3"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
```

(Continued on next page)

Platform Notes (Continued)

```
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
   Linux linux-5mn8 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Aug 6 02:05

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   852G   74G  779G   9% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U34 06/15/2018
  Memory:
   48x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml

Tested with SPEC CPU2017 v1.0.5 on 2018-08-06 02:06:06-0400.
Report generated on 2018-10-31 18:39:06 by CPU2017 PS formatter v6067.
Originally published on 2018-09-18.