SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.7

SPECrate2017_int_peak = Not Run

CPU2017 License: 97
Test Sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Mar-2018

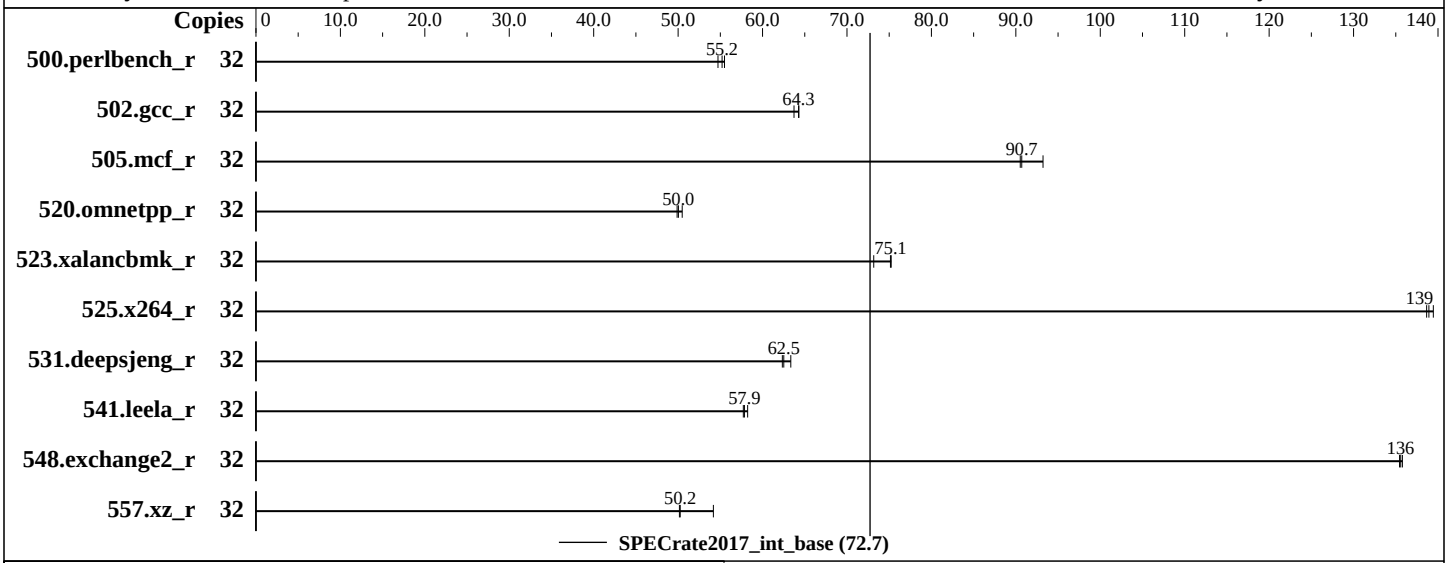

Hardware

CPU Name:	Intel Xeon Silver 4110
Max MHz.:	3000
Nominal:	2100
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	11 MB I+D on chip per chip
Other:	None
Memory:	192 GB (12 x 16 GB 2Rx4 PC4-2400T-R, running at 2400)
Storage:	1 x 1000 GB SATA, 7200 RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) 4.4.120-94.17-default
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 00.01.0014 released Jul-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_base = 72.7

SPECrate2017_int_peak = Not Run

CPU2017 License: 97
Test Sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	931	54.7	918	55.5	**923**	**55.2**							
502.gcc_r	32	711	63.7	705	64.3	**705**	**64.3**							
505.mcf_r	32	555	93.2	**570**	**90.7**	571	90.5							
520.omnetpp_r	32	842	49.9	**839**	**50.0**	832	50.5							
523.xalancbmk_r	32	**450**	**75.1**	462	73.2	449	75.2							
525.x264_r	32	404	139	**403**	**139**	402	139							
531.deepsjeng_r	32	579	63.3	**587**	**62.5**	588	62.3							
541.leela_r	32	918	57.7	910	58.2	**916**	**57.9**							
548.exchange2_r	32	617	136	619	135	**618**	**136**							
557.xz_r	32	638	54.2	689	50.2	**688**	**50.2**							

SPECrate2017_int_base = 72.7

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/ia32:/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-32:
/home/speccpu/cpu2017/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
CPU Power and Performance Policy set to Performance
IMC set to 1-way interleaving
Sub_NUMA Cluster set to enabled
Set Fan Profile set to Performance
 Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-65s1 Thu Sep 27 09:56:48 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
       2  "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 1 2 3 4 5 6 7
       physical 1: cores 0 1 2 3 4 5 6 7

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                32
      On-line CPU(s) list:   0-31
      Thread(s) per core:    2
      Core(s) per socket:    8
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
      Stepping:              4
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU MHz:               1165.930
      CPU max MHz:           3000.0000
      CPU min MHz:           800.0000
      BogoMIPS:              4190.16
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              11264K
      NUMA node0 CPU(s):     0-7,16-23
      NUMA node1 CPU(s):     8-15,24-31
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
      retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
      clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku
      ospke

  /proc/cpuinfo cache data
     cache size : 11264 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
    node 0 size: 96244 MB
    node 0 free: 95862 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
    node 1 size: 96619 MB
    node 1 free: 96222 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       197493152 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
```

(Continued on next page)

Platform Notes (Continued)

```
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

  uname -a:
     Linux linux-65s1 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Mitigation: PTI
  CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

  run-level 3 Sep 27 09:55

  SPEC is set to: /home/speccpu/cpu2017
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda3      xfs   929G  271G  659G  30% /

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS Intel Corporation SE5C620.86B.00.01.0014.070920180847 07/09/2018
    Memory:
     12x NO DIMM NO DIMM
     12x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Acer-Platform-Settings-V1.3-revC.html
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Acer-Platform-Settings-V1.3-revC.xml
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-09-26 21:56:47-0400.
Report generated on 2018-10-31 19:04:45 by CPU2017 PS formatter v6067.
Originally published on 2018-10-16.