



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

**SPECrate2017\_fp\_base = 259**

**SPECrate2017\_fp\_peak = 269**

CPU2017 License: 55


Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

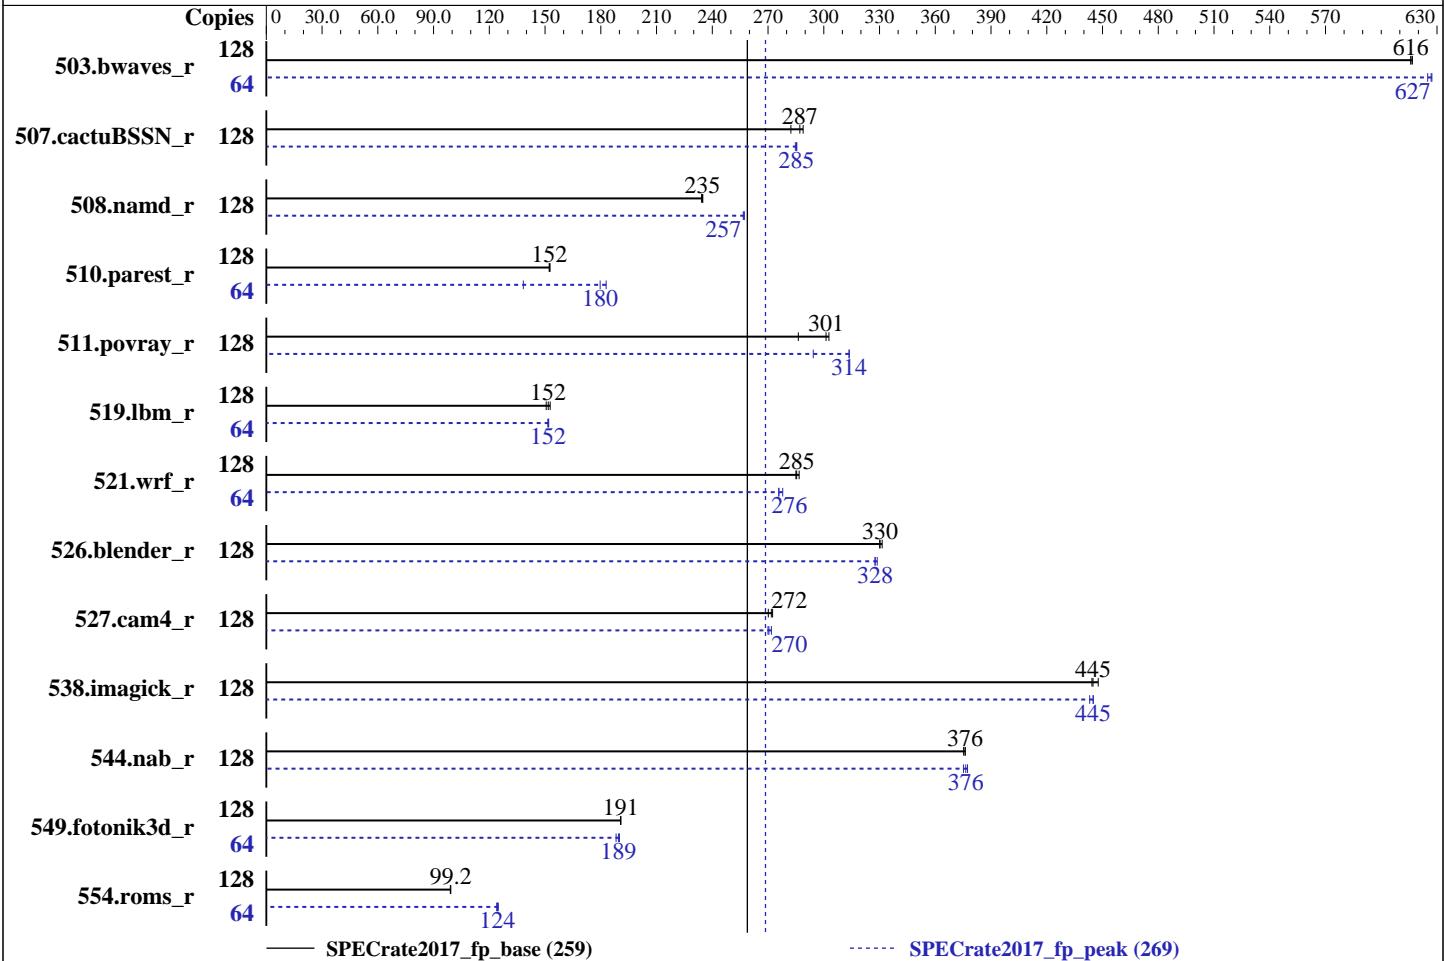

— SPECrate2017\_fp\_base (259)

- - - SPECrate2017\_fp\_peak (269)

## Hardware

CPU Name: AMD EPYC 7501  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4DRx4 PC4-2667V-L)  
 Storage: 1 x 120 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.138-8  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 62.5.1 released May-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library V4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

**SPECrate2017\_fp\_base = 259**

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

**SPECrate2017\_fp\_peak = 269**

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Results Table

| Benchmark       | Base   |             |            |             |            |             |             | Peak   |             |            |             |            |            |            |
|-----------------|--------|-------------|------------|-------------|------------|-------------|-------------|--------|-------------|------------|-------------|------------|------------|------------|
|                 | Copies | Seconds     | Ratio      | Seconds     | Ratio      | Seconds     | Ratio       | Copies | Seconds     | Ratio      | Seconds     | Ratio      | Seconds    | Ratio      |
| 503.bwaves_r    | 128    | <b>2084</b> | <b>616</b> | 2084        | 616        | 2081        | 617         | 64     | 1023        | 627        | <b>1024</b> | <b>627</b> | 1027       | 625        |
| 507.cactubSSN_r | 128    | <b>564</b>  | <b>287</b> | 561         | 289        | 574         | 282         | 128    | <b>568</b>  | <b>285</b> | 568         | 285        | 569        | 285        |
| 508.namd_r      | 128    | <b>518</b>  | <b>235</b> | 518         | 235        | 519         | 234         | 128    | <b>473</b>  | <b>257</b> | 473         | 257        | 474        | 257        |
| 510.parest_r    | 128    | 2199        | 152        | <b>2198</b> | <b>152</b> | 2193        | 153         | 64     | 915         | 183        | <b>932</b>  | <b>180</b> | 1210       | 138        |
| 511.povray_r    | 128    | 987         | 303        | 1044        | 286        | <b>992</b>  | <b>301</b>  | 128    | <b>953</b>  | <b>314</b> | 1015        | 294        | 953        | 314        |
| 519.lbm_r       | 128    | 883         | 153        | 896         | 151        | <b>889</b>  | <b>152</b>  | 64     | 444         | 152        | 445         | 152        | <b>445</b> | <b>152</b> |
| 521.wrf_r       | 128    | <b>1005</b> | <b>285</b> | 1006        | 285        | 1000        | 287         | 64     | 516         | 278        | 520         | 276        | <b>520</b> | <b>276</b> |
| 526.blender_r   | 128    | 588         | 331        | <b>590</b>  | <b>330</b> | 591         | 330         | 128    | <b>593</b>  | 329        | 595         | 328        | <b>595</b> | <b>328</b> |
| 527.cam4_r      | 128    | <b>824</b>  | <b>272</b> | 829         | 270        | 822         | 272         | 128    | <b>824</b>  | <b>272</b> | 829         | 270        | <b>828</b> | <b>270</b> |
| 538.imagick_r   | 128    | <b>716</b>  | <b>445</b> | 717         | 444        | 711         | 448         | 128    | <b>715</b>  | <b>445</b> | <b>715</b>  | <b>445</b> | 718        | 443        |
| 544.nab_r       | 128    | <b>573</b>  | <b>376</b> | 573         | 376        | 574         | 375         | 128    | <b>572</b>  | <b>376</b> | 571         | 377        | 574        | 375        |
| 549.fotonik3d_r | 128    | <b>2615</b> | <b>191</b> | 2617        | 191        | 2615        | 191         | 64     | <b>1316</b> | <b>189</b> | 1325        | 188        | 1312       | 190        |
| 554.roms_r      | 128    | 2050        | 99.2       | 2054        | 99.0       | <b>2050</b> | <b>99.2</b> | 64     | 815         | 125        | <b>817</b>  | <b>124</b> | 820        | 124        |

**SPECrate2017\_fp\_base = 259**

**SPECrate2017\_fp\_peak = 269**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_base = 259

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2018

Hardware Availability: Dec-2018

Software Availability: Jul-2018

## Operating System Notes (Continued)

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1704-rate-libs-revD/64;/home/cpu2017-1.0.5/amd1704-rate-libs-revD/32;"  
MALLOC_CONF = "lg_chunk:28"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>  
jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21}$  = 2MiB.

## Platform Notes

BIOS settings:

Memory Interleaving set to Channel Interleaving

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Platform Notes (Continued)

Turbo Boost enabled

C States set to Autonomous

Memory Patrol Scrub disabled

Memory Refresh Rate set to 1x

PCI ASPM L1 Link Power Management disabled

Determinism Slider set to Power Determinism

Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-1z15 Fri Sep 7 09:12:01 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7501 32-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings : 64
  physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
  29 30 31
  physical 1: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
  29 30 31
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):           8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                 1
Model name:             AMD EPYC 7501 32-Core Processor
Stepping:               2
CPU MHz:                1996.117
BogoMIPS:               3992.23
Virtualization:         AMD-V
L1d cache:              32K
L1i cache:              64K
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Platform Notes (Continued)

L2 cache: 512K  
L3 cache: 8192K  
NUMA node0 CPU(s): 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120  
NUMA node1 CPU(s): 2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122  
NUMA node2 CPU(s): 4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124  
NUMA node3 CPU(s): 6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126  
NUMA node4 CPU(s): 1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121  
NUMA node5 CPU(s): 3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123  
NUMA node6 CPU(s): 5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125  
NUMA node7 CPU(s): 7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc extd\_apicid amd\_dcm aperfmpfperf eagerfpu dni pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx arat cpb hw\_pstate ssbd ibpb retpoline retpoline\_amd npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha\_ni xsaveopt xsavec xgetbv1 clzero irperf overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120  
node 0 size: 128686 MB  
node 0 free: 128506 MB  
node 1 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122  
node 1 size: 129020 MB  
node 1 free: 128839 MB  
node 2 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124  
node 2 size: 129020 MB  
node 2 free: 128857 MB  
node 3 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126  
node 3 size: 129020 MB  
node 3 free: 128816 MB  
node 4 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121  
node 4 size: 129020 MB  
node 4 free: 128860 MB  
node 5 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123  
node 5 size: 129020 MB  
node 5 free: 128859 MB  
node 6 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125  
node 6 size: 129020 MB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Platform Notes (Continued)

```
node 6 free: 128849 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
node 7 size: 129019 MB
node 7 free: 128839 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 16 16 16 28 28 22 28
  1: 16 10 16 16 28 28 28 22
  2: 16 16 10 16 22 28 28 28
  3: 16 16 16 10 28 22 28 28
  4: 28 28 22 28 10 16 16 16
  5: 28 28 28 22 16 10 16 16
  6: 22 28 28 28 16 16 10 16
  7: 28 22 28 28 16 16 16 10

From /proc/meminfo
MemTotal:      1056596448 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-1z15 4.4.138-8.g8686768-default #1 SMP Mon Jun 25 17:25:25 UTC 2018
(8686768) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

run-level 3 Sep 7 09:11 last=5

SPEC is set to: /home/cpu2017-1.0.5

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda4  | xfs  | 144G | 3.9G | 140G  | 3%   | /home      |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 62.5.1 [MaxPerf C\_En] 05/21/2018

Memory:

|     |               |                  |       |        |      |
|-----|---------------|------------------|-------|--------|------|
| 16x | 80CE863280CE  | M386A8K40BM2-CTD | 64 GB | 4 rank | 2666 |
| 16x | Not Specified | Not Specified    |       |        |      |

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

FC 507.cactusBSSN\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base,  
peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====

CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

GNU Fortran (GCC) 4.8.2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Compiler Version Notes (Continued)

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 259

SPECrate2017\_fp\_peak = 269

Test Date: Sep-2018

Hardware Availability: Dec-2018

Software Availability: Jul-2018

## Base Portability Flags (Continued)

538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-festo -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs  
-ljemalloc
```

C++ benchmarks:

```
-festo -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-festo -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -maxx -madx -funroll-loops -ffast-math -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-festo -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -maxx -madx  
-funroll-loops -z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-festo -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 259

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Date: Sep-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Jul-2018

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp  
-O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp  
-finline-aggressive -maxx -madx -funroll-loops -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_base = 259

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Sep-2018  
Hardware Availability: Dec-2018  
Software Availability: Jul-2018

## Peak Optimization Flags

C benchmarks:

```
-futto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
-futto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-futto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops
-ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

521.wrf\_r: -futto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx -ffast-math
-funroll-loops -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-ljemalloc -lgfortran -lamdlibm

527.cam4\_r: -futto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -O3 -mavx2 -madx
-funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-ljemalloc -lgfortran -lamdlibm

Benchmarks using both C and C++:

```
-futto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_base = 259

SPECrate2017\_fp\_peak = 269

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2018

Hardware Availability: Dec-2018

Software Availability: Jul-2018

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-flio -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madx  
-funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-09-07 10:12:00-0400.

Report generated on 2018-11-13 15:14:49 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-13.