SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017_fp_base = 14.4

SPECrate2017_fp_peak = 14.7

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Apr-2017
Software Availability: Mar-2018

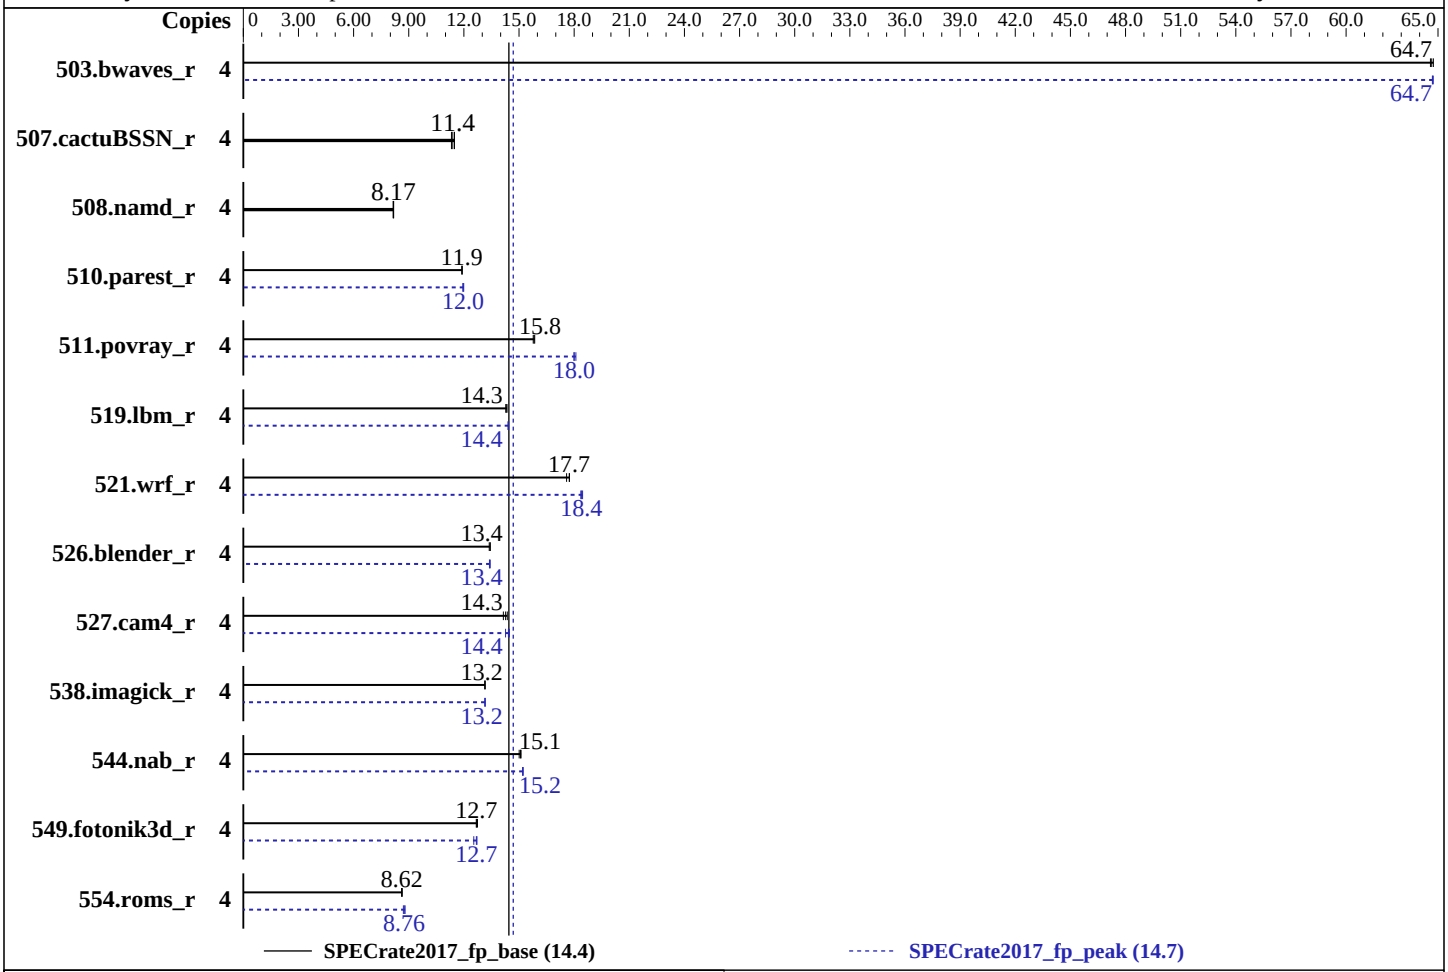

Hardware

CPU Name:	Intel Pentium G4560
Max MHz.:	3500
Nominal:	3500
Enabled:	2 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	3 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)
Storage:	1 x 1 TB SATA, 7200 RPM
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.4 (Maipo) Kernel 3.10.0-693.21.1.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 5.0.3006 02/28/2018 released Apr-2018
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017_fp_base = 14.4

SPECrate2017_fp_peak = 14.7

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2018
Hardware Availability: Apr-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	4	620	64.7	621	64.6	**620**	**64.7**	4	**620**	**64.7**	620	64.7	620	64.7
507.cactuBSSN_r	4	441	11.5	447	11.3	**444**	**11.4**	4	441	11.5	447	11.3	**444**	**11.4**
508.namd_r	4	**465**	**8.17**	465	8.18	466	8.15	4	**465**	**8.17**	465	8.18	466	8.15
510.parest_r	4	**880**	**11.9**	880	11.9	879	11.9	4	873	12.0	**875**	**12.0**	876	12.0
511.povray_r	4	589	15.9	**591**	**15.8**	592	15.8	4	519	18.0	516	18.1	**519**	**18.0**
519.lbm_r	4	295	14.3	294	14.3	**295**	**14.3**	4	**292**	**14.4**	293	14.4	292	14.4
521.wrf_r	4	505	17.7	509	17.6	**505**	**17.7**	4	488	18.4	485	18.5	**487**	**18.4**
526.blender_r	4	454	13.4	**454**	**13.4**	455	13.4	4	455	13.4	**454**	**13.4**	454	13.4
527.cam4_r	4	494	14.1	**490**	**14.3**	487	14.4	4	490	14.3	483	14.5	**485**	**14.4**
538.imagick_r	4	**756**	**13.2**	757	13.1	756	13.2	4	**756**	**13.2**	756	13.2	757	13.1
544.nab_r	4	**446**	**15.1**	449	15.0	445	15.1	4	443	15.2	442	15.2	**443**	**15.2**
549.fotonik3d_r	4	1224	12.7	1230	12.7	**1228**	**12.7**	4	1226	12.7	1243	12.5	**1230**	**12.7**
554.roms_r	4	**737**	**8.62**	738	8.62	735	8.64	4	730	8.71	**726**	**8.76**	722	8.80

SPECrate2017_fp_base = 14.4

SPECrate2017_fp_peak = 14.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 >       /proc/sys/vm/drop_caches

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
 DCU Streamer Prefetcher: Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on t110is Thu Nov  1 21:06:04 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
      1  "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 2
      siblings  : 4
      physical 0: cores 0 1

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                4
     On-line CPU(s) list:   0-3
     Thread(s) per core:    2
     Core(s) per socket:    2
     Socket(s):             1
     NUMA node(s):          1
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 158
     Model name:            Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
     Stepping:              9
     CPU MHz:               3272.363
     CPU max MHz:           3500.0000
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU min MHz:           800.0000
      BogoMIPS:              7008.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              3072K
      NUMA node0 CPU(s):     0-3
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 cx16 xtpr
      pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
      lahf_lm abm 3dnowprefetch epb invpcid_single intel_pt spec_ctrl ibpb_support
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx
      rdseed smap clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify
      hwp_act_window hwp_epp

  /proc/cpuinfo cache data
     cache size : 3072 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 1 nodes (0)
    node 0 cpus: 0 1 2 3
    node 0 size: 65475 MB
    node 0 free: 63625 MB
    node distances:
    node   0
      0:  10

  From /proc/meminfo
     MemTotal:       65916052 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.4 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
        VARIANT_ID="server"
        VERSION_ID="7.4"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
     redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
```


(Continued on next page)

Platform Notes (Continued)

```
    system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

 uname -a:
    Linux t110is 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Nov 1 21:00

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      ext4  909G  111G  752G  13% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 5.0.3006 02/28/2018
   Memory:
    4x Micron 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

538.imagick_r: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs

(Continued on next page)

Peak Optimization Flags (Continued)

554.roms_r (continued):
-align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xSSE4.2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xSSE4.2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-11-01 08:06:03-0400.
Report generated on 2018-11-27 13:28:20 by CPU2017 PS formatter v6067.
Originally published on 2018-11-27.