# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2146G, 3.50GHz

SPECspeed2017_int_base = 10.3

SPECspeed2017_int_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Oct-2018
**Hardware Availability:** Nov-2018
**Software Availability:** Sep-2018

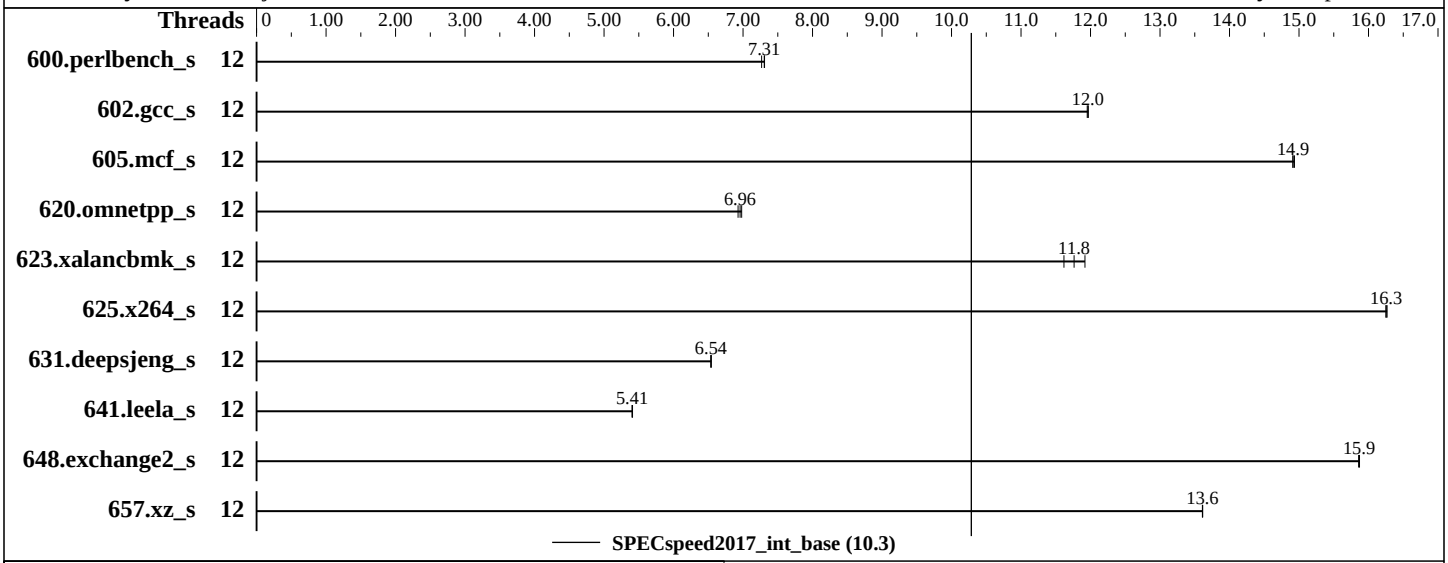


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E-2146G |
| Max MHz.: | 4500 |
| Nominal: | 3500 |
| Enabled: | 6 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 256 KB I+D on chip per core |
| L3: | 12 MB I+D on chip per chip |
| Other: | None |
| Memory: | 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E) |
| Storage: | 1 x SATA M.2 SSD, 240 GB |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux Server release 7.5 (Maipo)<br>3.10.0-862.el7.x86_64 |
| Compiler: | C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Fujitsu BIOS Version V5.0.0.13 R1.4.0 for D3673-A1x. Released Nov-2018 tested as V5.0.0.13 R1.0.0 for D3673-A1x Sep-2018 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc memory allocator library V5.0.1 |

# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2146G, 3.50GHz

SPECspeed2017_int_base = 10.3

SPECspeed2017_int_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Oct-2018
**Hardware Availability:** Nov-2018
**Software Availability:** Sep-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 12 | 244 | 7.27 | **243** | **7.31** | 243 | 7.31 | | | | | | | |
| 602.gcc_s | 12 | 333 | 12.0 | **333** | **12.0** | 333 | 12.0 | | | | | | | |
| 605.mcf_s | 12 | **317** | **14.9** | 316 | 14.9 | 317 | 14.9 | | | | | | | |
| 620.omnetpp_s | 12 | 234 | 6.98 | 235 | 6.93 | **234** | **6.96** | | | | | | | |
| 623.xalancbmk_s | 12 | **120** | **11.8** | 122 | 11.6 | 119 | 11.9 | | | | | | | |
| 625.x264_s | 12 | **109** | **16.3** | 109 | 16.2 | 108 | 16.3 | | | | | | | |
| 631.deepsjeng_s | 12 | 219 | 6.54 | 219 | 6.54 | **219** | **6.54** | | | | | | | |
| 641.leela_s | 12 | 315 | 5.41 | 316 | 5.40 | **316** | **5.41** | | | | | | | |
| 648.exchange2_s | 12 | 185 | 15.9 | **185** | **15.9** | 185 | 15.9 | | | | | | | |
| 657.xz_s | 12 | 454 | 13.6 | **454** | **13.6** | 454 | 13.6 | | | | | | | |

SPECspeed2017_int_base = **10.3**

SPECspeed2017_int_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
OMP_STACKSIZE = "192M"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19/ic19.0-lib/ia32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19/ic19.0-lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Xeon E-2186G CPU + 64GB RAM
 memory using Red Hat Enterprise Linux Server release 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 > /proc/sys/vm/drop_caches
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5
 jemalloc: sources available via jemalloc.net
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 BIOS configuration:
 DCU Streamer Prefetcher = Disabled
 DDR PowerDown and idle counter = PCODE
 CState Pre-Wake = Disabled
 Package C-State Un-demotion = Enabled
 REFRESH_2X_MODE = 1- Enabled for WARM or HOT
 Sysinfo program /home/Benchmark/speccpu2017-ic19/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on localhost.localdomain Tue Oct 30 14:02:01 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) E-2146G CPU @ 3.50GHz
       1  "physical id"s (chips)
       12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 6
       siblings  : 12
       physical 0: cores 0 1 2 3 4 5

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                12
      On-line CPU(s) list:   0-11
      Thread(s) per core:    2
      Core(s) per socket:    6
      Socket(s):             1
      NUMA node(s):          1
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 158
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Model name:            Intel(R) Xeon(R) E-2146G CPU @ 3.50GHz
      Stepping:              10
      CPU MHz:               4341.033
      CPU max MHz:           4500.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7008.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              12288K
      NUMA node0 CPU(s):     0-11
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 ibpb ibrs stibp dtherm ida
      arat pln pts hwp hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp

  /proc/cpuinfo cache data
     cache size : 12288 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 1 nodes (0)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
    node 0 size: 65277 MB
    node 0 free: 63175 MB
    node distances:
    node   0
      0:  10

  From /proc/meminfo
     MemTotal:       65543968 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.5 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      VARIANT_ID="server"
      VERSION_ID="7.5"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
   redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

 uname -a:
   Linux localhost.localdomain 3.10.0-862.el7.x86_64 #1 SMP Wed Mar 21 18:14:51 EDT 2018
   x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Oct 30 13:56

 SPEC is set to: /home/Benchmark/speccpu2017-ic19
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   150G   33G  118G  22% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS FUJITSU // American Megatrends Inc. V5.0.0.13 R1.0.0 for D3673-A1x
       09/14/2018
   Memory:
    4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
      657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================
 FC  648.exchange2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

## Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.xml


SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-10-30 01:02:00-0400.
Report generated on 2018-11-27 13:40:35 by CPU2017 PS formatter v6067.
Originally published on 2018-11-27.