SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7281)

SPECrate2017_fp_base = 82.6

SPECrate2017_fp_peak = 84.2

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Sep-2018
Software Availability: Feb-2018

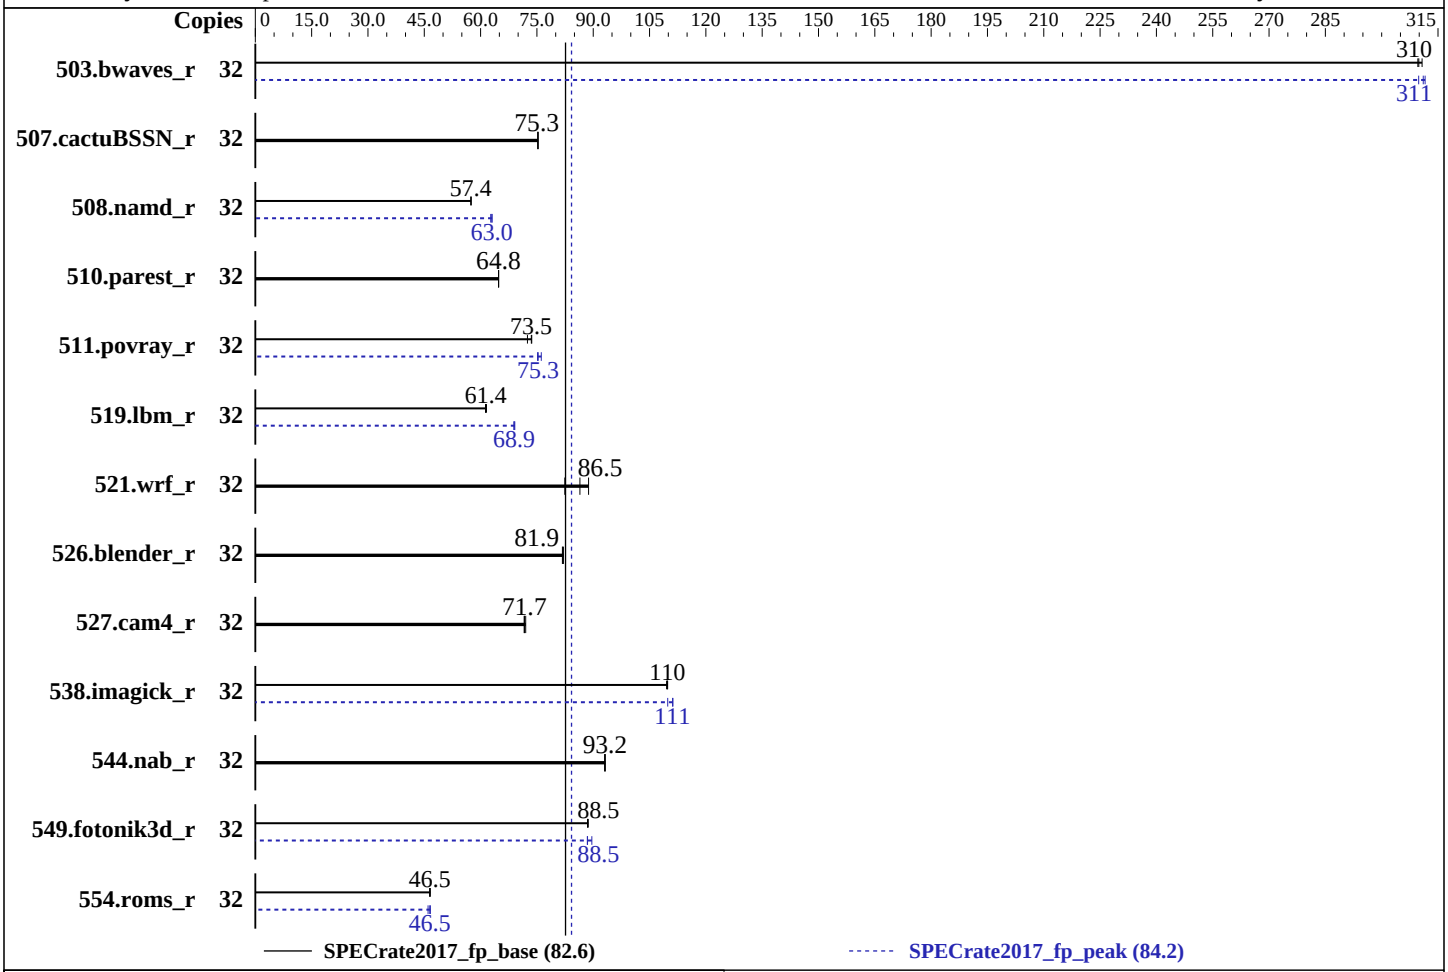

Hardware

CPU Name:	AMD EPYC 7281
Max MHz.:	2700
Nominal:	2100
Enabled:	16 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	32 MB I+D on chip per chip, 4 MB shared / 2 cores
Other:	None
Memory:	512 GB (8 x 64 GB 4Rx4 PC4-2666V-L)
Storage:	1 x 200 GB SATAIII SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64) kernel 4.4.114-94.11-default
Compiler:	C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	Supermicro BIOS version 1.0 released Sep-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc general purpose malloc implementation V4.5.0

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1113S-WN10RT
(H11SSW-NT , AMD EPYC 7281)

SPECrate2017_fp_base = 82.6

SPECrate2017_fp_peak = 84.2

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Sep-2018
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1033	311	1036	310	**1036**	**310**	32	1036	310	**1032**	**311**	1030	312
507.cactuBSSN_r	32	539	75.2	**538**	**75.3**	538	75.3	32	539	75.2	**538**	**75.3**	538	75.3
508.namd_r	32	529	57.4	**529**	**57.4**	529	57.5	32	485	62.7	482	63.1	**483**	**63.0**
510.parest_r	32	1292	64.8	**1292**	**64.8**	1292	64.8	32	1292	64.8	**1292**	**64.8**	1292	64.8
511.povray_r	32	1031	72.5	1015	73.6	**1016**	**73.5**	32	981	76.2	994	75.2	**992**	**75.3**
519.lbm_r	32	548	61.6	550	61.3	**550**	**61.4**	32	490	68.9	488	69.1	**489**	**68.9**
521.wrf_r	32	870	82.4	808	88.8	**829**	**86.5**	32	870	82.4	808	88.8	**829**	**86.5**
526.blender_r	32	594	82.1	596	81.8	**595**	**81.9**	32	594	82.1	596	81.8	**595**	**81.9**
527.cam4_r	32	**781**	**71.7**	782	71.6	777	72.0	32	**781**	**71.7**	782	71.6	777	72.0
538.imagick_r	32	**725**	**110**	727	110	725	110	32	716	111	**716**	**111**	725	110
544.nab_r	32	578	93.2	**578**	**93.2**	579	93.0	32	578	93.2	**578**	**93.2**	579	93.0
549.fotonik3d_r	32	1406	88.7	1409	88.5	**1409**	**88.5**	32	1410	88.4	1391	89.6	**1409**	**88.5**
554.roms_r	32	**1094**	**46.5**	1095	46.4	1091	46.6	32	**1094**	**46.5**	1091	46.6	1105	46.0

SPECrate2017_fp_base = 82.6

SPECrate2017_fp_peak = 84.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

(Continued on next page)

Operating System Notes (Continued)

```
Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revD/64;/home/cpu2017/amd1704-rate-libs-revD/32:"
MALLOC_CONF = "lg_chunk:28"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4
jemalloc, a general purpose malloc implementation, was obtained at
https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
  narenas: sets the maximum number of arenas to use for automatic multiplexing
           of threads and arenas.
  lg_chunk: set the virtual memory chunk size (log base 2). For example,
            lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Determinism Slider = Power
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-pm02 Sat Nov 24 04:59:21 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7281 16-Core Processor
```

(Continued on next page)

Platform Notes (Continued)

```
      1  "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                32
      On-line CPU(s) list:   0-31
      Thread(s) per core:    2
      Core(s) per socket:    16
      Socket(s):             1
      NUMA node(s):          4
      Vendor ID:             AuthenticAMD
      CPU family:            23
      Model:                 1
      Model name:            AMD EPYC 7281 16-Core Processor
      Stepping:              2
      CPU MHz:               2100.000
      CPU max MHz:           2100.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              4200.16
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             64K
      L2 cache:              512K
      L3 cache:              4096K
      NUMA node0 CPU(s):     0-3,16-19
      NUMA node1 CPU(s):     4-7,20-23
      NUMA node2 CPU(s):     8-11,24-27
      NUMA node3 CPU(s):     12-15,28-31
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
      flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
      smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
      ibpb overflow_recov succor smca
```

(Continued on next page)

Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 16 17 18 19
   node 0 size: 128826 MB
   node 0 free: 128655 MB
   node 1 cpus: 4 5 6 7 20 21 22 23
   node 1 size: 129022 MB
   node 1 free: 128875 MB
   node 2 cpus: 8 9 10 11 24 25 26 27
   node 2 size: 129022 MB
   node 2 free: 128871 MB
   node 3 cpus: 12 13 14 15 28 29 30 31
   node 3 size: 129021 MB
   node 3 free: 128876 MB
   node distances:
   node   0   1   2   3
     0:  10  16  16  16
     1:  16  10  16  16
     2:  16  16  10  16
     3:  16  16  16  10

 From /proc/meminfo
    MemTotal:       528274456 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux linux-pm02 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

 run-level 3 Nov 23 14:06

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   145G  5.7G  139G   4% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 1.0 09/04/2018
   Memory:
    8x NO DIMM NO DIMM
    8x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
     peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs
-ljemalloc

C++ benchmarks:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-z muldefs -ljemalloc

Fortran benchmarks:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -mavx -madx -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm

Benchmarks using both Fortran and C:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -mavx -madx
-funroll-loops -z muldefs -fplugin=dragonegg.so

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm

Benchmarks using both C and C++:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-finline-aggressive -z muldefs -ljemalloc

Benchmarks using Fortran, C, and C++:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-finline-aggressive -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc

510.parest_r: basepeak = yes

Fortran benchmarks:
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops
-ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc
-lgfortran -lamdlibm

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r (continued):
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -finline-aggressive
-ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml
http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-23 15:59:20-0500.
Report generated on 2018-12-11 14:58:41 by CPU2017 PS formatter v6067.
Originally published on 2018-12-11.