# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

## Express5800/R110j-1 (Intel Xeon E-2186G)

SPECrate2017_fp_base = 38.4

SPECrate2017_fp_peak = 39.0

**CPU2017 License:** 9006
**Test Sponsor:** NEC Corporation
**Tested by:** NEC Corporation

**Test Date:** Nov-2018
**Hardware Availability:** Dec-2018
**Software Availability:** Aug-2018

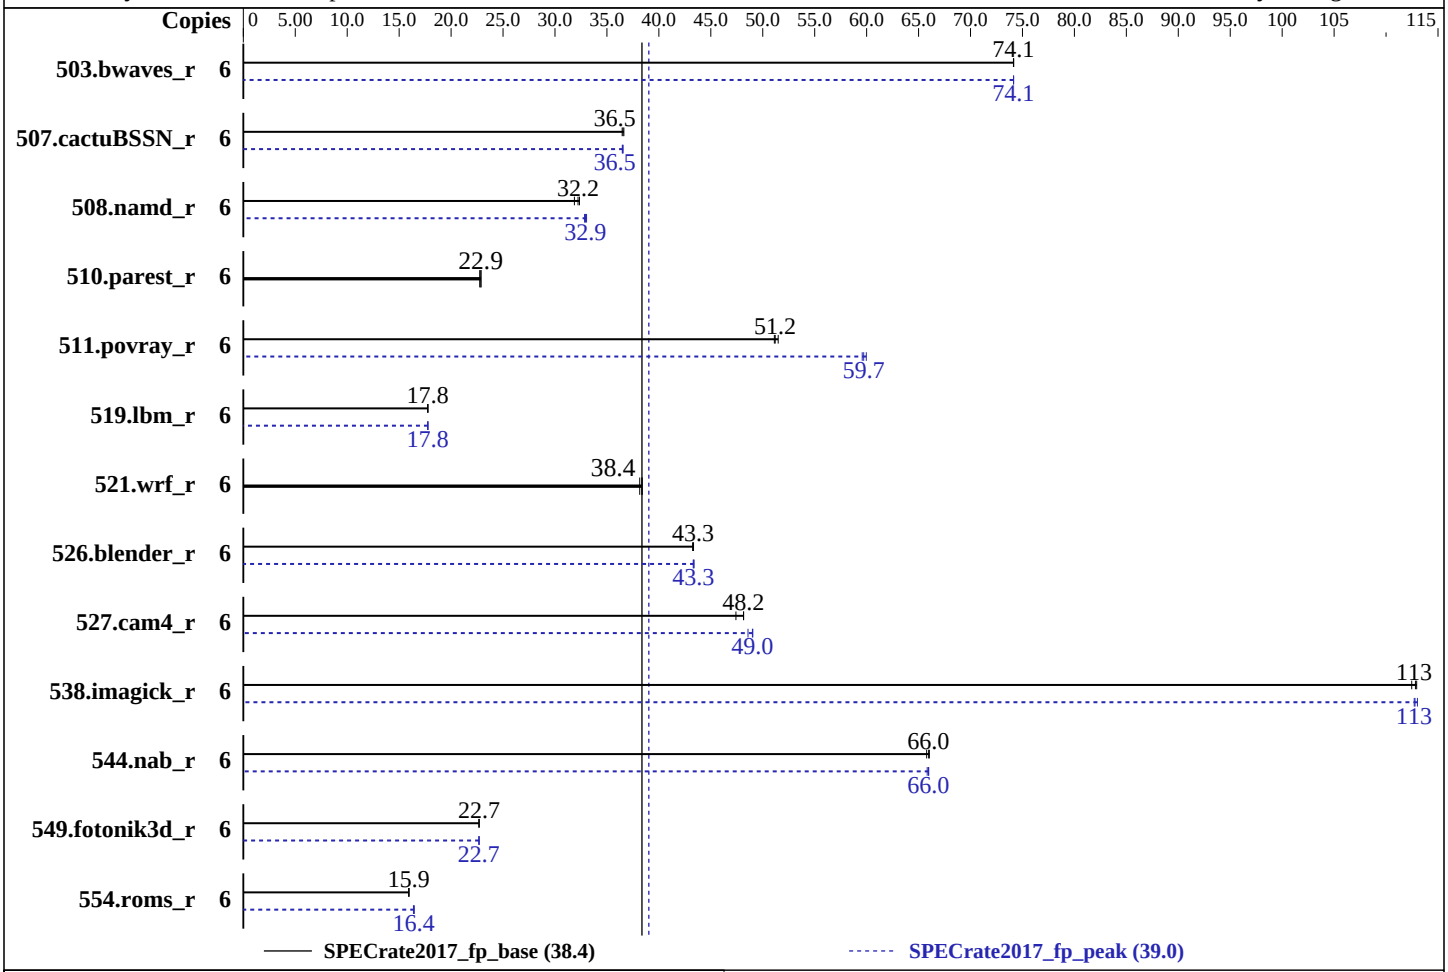


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E-2186G |
| Max MHz.: | 4700 |
| Nominal: | 3800 |
| Enabled: | 6 cores, 1 chip |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 256 KB I+D on chip per core |
| L3: | 12 MB I+D on chip per chip |
| Other: | None |
| Memory: | 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E) |
| Storage: | 1 x 1 TB SATA, 7200 RPM, RAID 0 |
| Other: | None |

### Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux Server release 7.5 (Maipo)<br>Kernel 3.10.0-862.11.6.el7.x86_64 |
| Compiler: | C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | NEC BIOS Version U43 10/02/2018 released Dec-2018 |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |

# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

## Express5800/R110j-1 (Intel Xeon E-2186G)

SPECrate2017_fp_base = 38.4

SPECrate2017_fp_peak = 39.0

**CPU2017 License:** 9006
**Test Sponsor:** NEC Corporation
**Tested by:** NEC Corporation

**Test Date:** Nov-2018
**Hardware Availability:** Dec-2018
**Software Availability:** Aug-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 6 | 811 | 74.2 | 812 | 74.1 | **811** | **74.1** | 6 | **811** | **74.1** | 812 | 74.1 | 811 | 74.1 |
| 507.cactuBSSN_r | 6 | **208** | **36.5** | 208 | 36.5 | 207 | 36.6 | 6 | 208 | 36.5 | 208 | 36.6 | **208** | **36.5** |
| 508.namd_r | 6 | 179 | 31.9 | **177** | **32.2** | 176 | 32.4 | 6 | **173** | **32.9** | 173 | 33.0 | 174 | 32.8 |
| 510.parest_r | 6 | **687** | **22.9** | 690 | 22.8 | 686 | 22.9 | 6 | **687** | **22.9** | 690 | 22.8 | 686 | 22.9 |
| 511.povray_r | 6 | 272 | 51.5 | 274 | 51.1 | **274** | **51.2** | 6 | **235** | **59.7** | 235 | 59.6 | 234 | 60.0 |
| 519.lbm_r | 6 | **356** | **17.8** | 356 | 17.8 | 356 | 17.8 | 6 | 356 | 17.8 | 356 | 17.7 | **356** | **17.8** |
| 521.wrf_r | 6 | 350 | 38.4 | **350** | **38.4** | 352 | 38.2 | 6 | 350 | 38.4 | **350** | **38.4** | 352 | 38.2 |
| 526.blender_r | 6 | 211 | 43.3 | **211** | **43.3** | 211 | 43.3 | 6 | 211 | 43.4 | 211 | 43.3 | **211** | **43.3** |
| 527.cam4_r | 6 | 218 | 48.2 | **218** | **48.2** | 221 | 47.4 | 6 | **214** | **49.0** | 214 | 49.0 | 216 | 48.6 |
| 538.imagick_r | 6 | 132 | 113 | 133 | 112 | **132** | **113** | 6 | **132** | **113** | 132 | 113 | 132 | 113 |
| 544.nab_r | 6 | 153 | 66.0 | **153** | **66.0** | 154 | 65.8 | 6 | **153** | **66.0** | 153 | 65.8 | 153 | 66.0 |
| 549.fotonik3d_r | 6 | 1030 | 22.7 | **1031** | **22.7** | 1031 | 22.7 | 6 | **1031** | **22.7** | 1031 | 22.7 | 1030 | 22.7 |
| 554.roms_r | 6 | **598** | **15.9** | 598 | 15.9 | 599 | 15.9 | 6 | 582 | 16.4 | 579 | 16.5 | **581** | **16.4** |

**SPECrate2017_fp_base = 38.4**

**SPECrate2017_fp_peak = 39.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "systemctl stop irqbalance.service"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 >       /proc/sys/vm/drop_caches

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS Settings:
 Thermal Configuration: Maximum Cooling
 Workload Profile: Custom
 Intel Hyper-Threading: Disabled
 Intel Virtualization Technology (Intel VT): Disabled
 Energy Efficient Turbo: Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on r110j Fri Nov  9 22:15:51 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz
      1  "physical id"s (chips)
      6 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 6
      siblings  : 6
      physical 0: cores 0 1 2 3 4 5

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                6
     On-line CPU(s) list:   0-5
     Thread(s) per core:    1
     Core(s) per socket:    6
     Socket(s):             1
     NUMA node(s):          1
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 158
     Model name:            Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Stepping:              10
      CPU MHz:               4424.597
      CPU max MHz:           4700.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7584.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              12288K
      NUMA node0 CPU(s):     0-5
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 dtherm ida
      arat pln pts hwp hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp flush_l1d

  /proc/cpuinfo cache data
     cache size : 12288 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 1 nodes (0)
    node 0 cpus: 0 1 2 3 4 5
    node 0 size: 65385 MB
    node 0 free: 63375 MB
    node distances:
    node   0
      0:  10

  From /proc/meminfo
     MemTotal:       65820832 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.5 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
        VARIANT_ID="server"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      VERSION_ID="7.5"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
   redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

 uname -a:
   Linux r110j 3.10.0-862.11.6.el7.x86_64 #1 SMP Fri Aug 10 16:55:11 UTC 2018 x86_64
   x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Mitigation: PTI
 CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

 run-level 3 Nov 9 22:10

 SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      ext4  909G   82G  781G  10% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS NEC U43 10/02/2018
   Memory:
    4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2667

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs`

## Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

519.lbm_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

538.imagick_r: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-R110j-RevC.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-R110j-RevC.xml


SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-09 08:15:50-0500.
Report generated on 2018-12-26 12:58:13 by CPU2017 PS formatter v6067.
Originally published on 2018-12-25.