SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 240

SPECrate2017_fp_peak = 243

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Mar-2018
Software Availability: Feb-2018

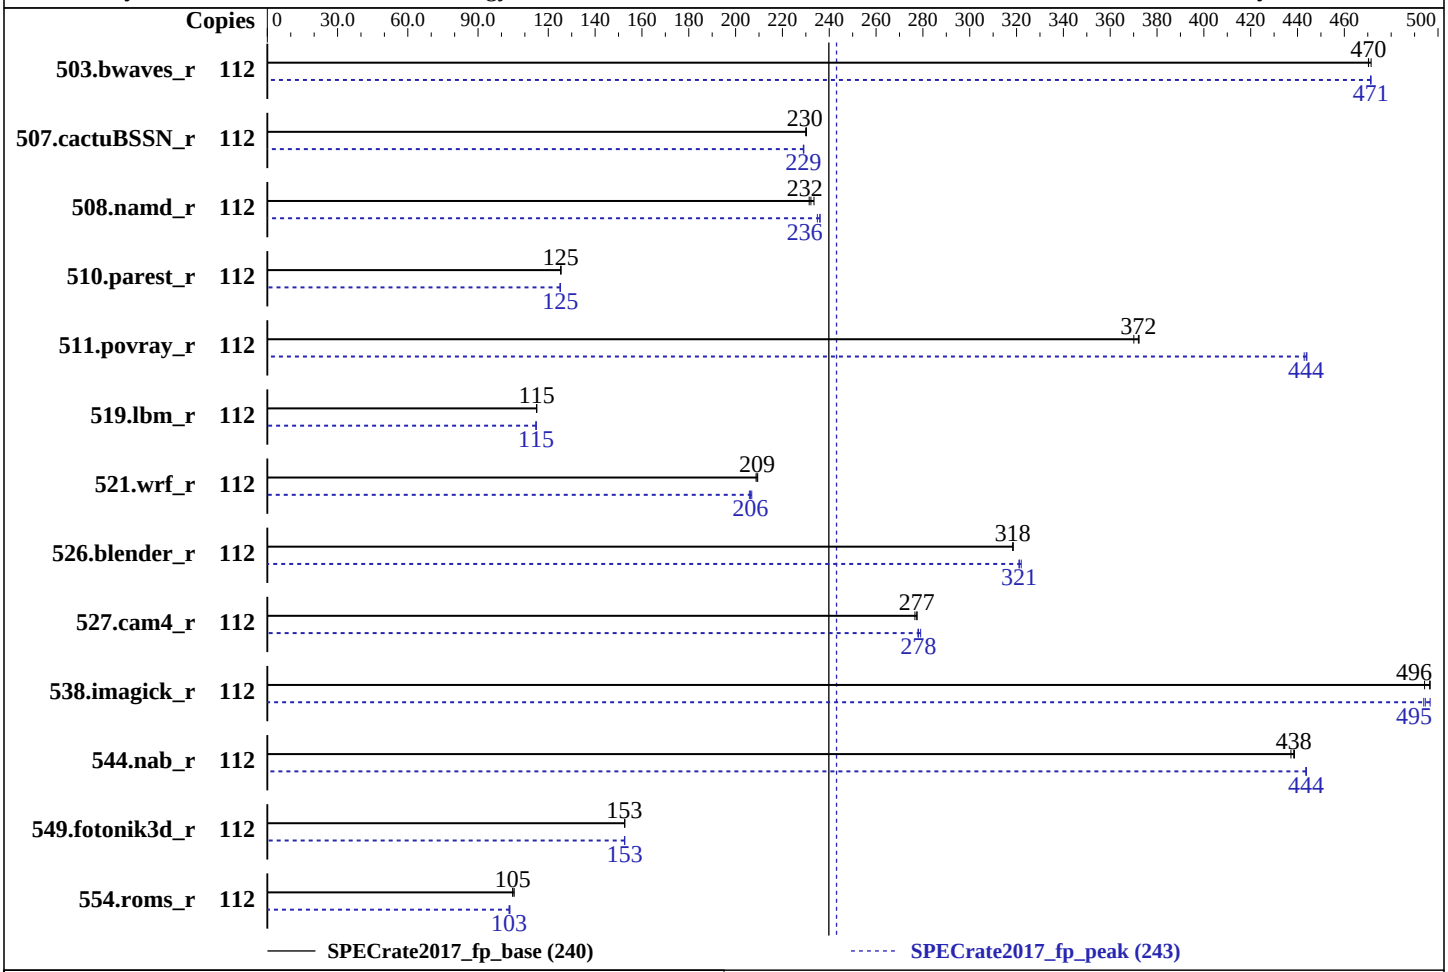

Hardware

CPU Name:	Intel Xeon Platinum 8180
Max MHz.:	3800
Nominal:	2500
Enabled:	56 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 800 GB SAS SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.114-92.64-default
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version OTE105K 1.00 released Mar-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 240

SPECrate2017_fp_peak = 243

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2018
Hardware Availability: Mar-2018
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2388	470	2382	471	**2388**	**470**	112	2383	471	**2383**	**471**	2383	471
507.cactuBSSN_r	112	**616**	**230**	616	230	617	230	112	619	229	**619**	**229**	619	229
508.namd_r	112	460	231	**458**	**232**	456	233	112	453	235	451	236	**451**	**236**
510.parest_r	112	2337	125	2338	125	**2337**	**125**	112	**2341**	**125**	2340	125	2344	125
511.povray_r	112	707	370	702	372	**703**	**372**	112	591	443	589	444	**589**	**444**
519.lbm_r	112	1026	115	**1026**	**115**	1027	115	112	1028	115	1028	115	**1028**	**115**
521.wrf_r	112	1202	209	1198	209	**1199**	**209**	112	1213	207	1219	206	**1215**	**206**
526.blender_r	112	536	319	**536**	**318**	536	318	112	530	322	**531**	**321**	531	321
527.cam4_r	112	**706**	**277**	708	277	706	278	112	705	278	**704**	**278**	702	279
538.imagick_r	112	**561**	**496**	564	494	561	497	112	561	497	**563**	**495**	564	494
544.nab_r	112	430	439	431	437	**430**	**438**	112	**425**	**444**	425	444	425	444
549.fotonik3d_r	112	2860	153	**2860**	**153**	2859	153	112	2859	153	2861	153	**2860**	**153**
554.roms_r	112	1688	105	1698	105	**1697**	**105**	112	**1722**	**103**	1723	103	1717	104

SPECrate2017_fp_base = 240

SPECrate2017_fp_peak = 243

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
Hardware Prefetcher set to Disable
DCU Streamer Prefetcher set to Disable
LLC Deadline alloc set to Disable
 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on oc1 Wed May 16 09:56:11 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
       2  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                112
      On-line CPU(s) list:   0-111
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      Stepping:              4
      CPU MHz:               2494.133
      BogoMIPS:              4988.26
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
      dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
    79
    node 0 size: 96355 MB
    node 0 free: 96093 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
    82 83
    node 1 size: 96753 MB
    node 1 free: 96292 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
    101 105 106 107
    node 2 size: 96753 MB
    node 2 free: 96485 MB
    node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
    108 109 110 111
    node 3 size: 96750 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 free: 96362 MB
  node distances:
  node   0   1   2   3
    0:  10  11  21  21
    1:  11  10  21  21
    2:  21  21  10  11
    3:  21  21  11  10

From /proc/meminfo
   MemTotal:       395892000 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 2
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP2"
      VERSION_ID="12.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
   Linux oc1 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db) x86_64
   x86_64 x86_64 GNU/Linux

run-level 3 May 16 09:54

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   446G   25G  422G   6% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[OTE105K-1.00]- 03/13/2018
  Memory:
   1x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
   4x NO DIMM NO DIMM
```

(Continued on next page)

Platform Notes (Continued)

```
    11x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`

(Continued on next page)

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

(Continued on next page)

Peak Optimization Flags (Continued)

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs`
`-align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3`
`-no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-15 21:56:10-0400.
Report generated on 2018-12-26 12:59:56 by CPU2017 PS formatter v6067.
Originally published on 2018-12-25.