SPEC® CPU2017 Integer Speed Result

Lenovo Global Technology

Thinksystem SR250
(3.50 GHz, Intel Xeon E-2134)

SPECspeed2017_int_base = 9.77

SPECspeed2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2018
Hardware Availability: Jan-2019
Software Availability: May-2018

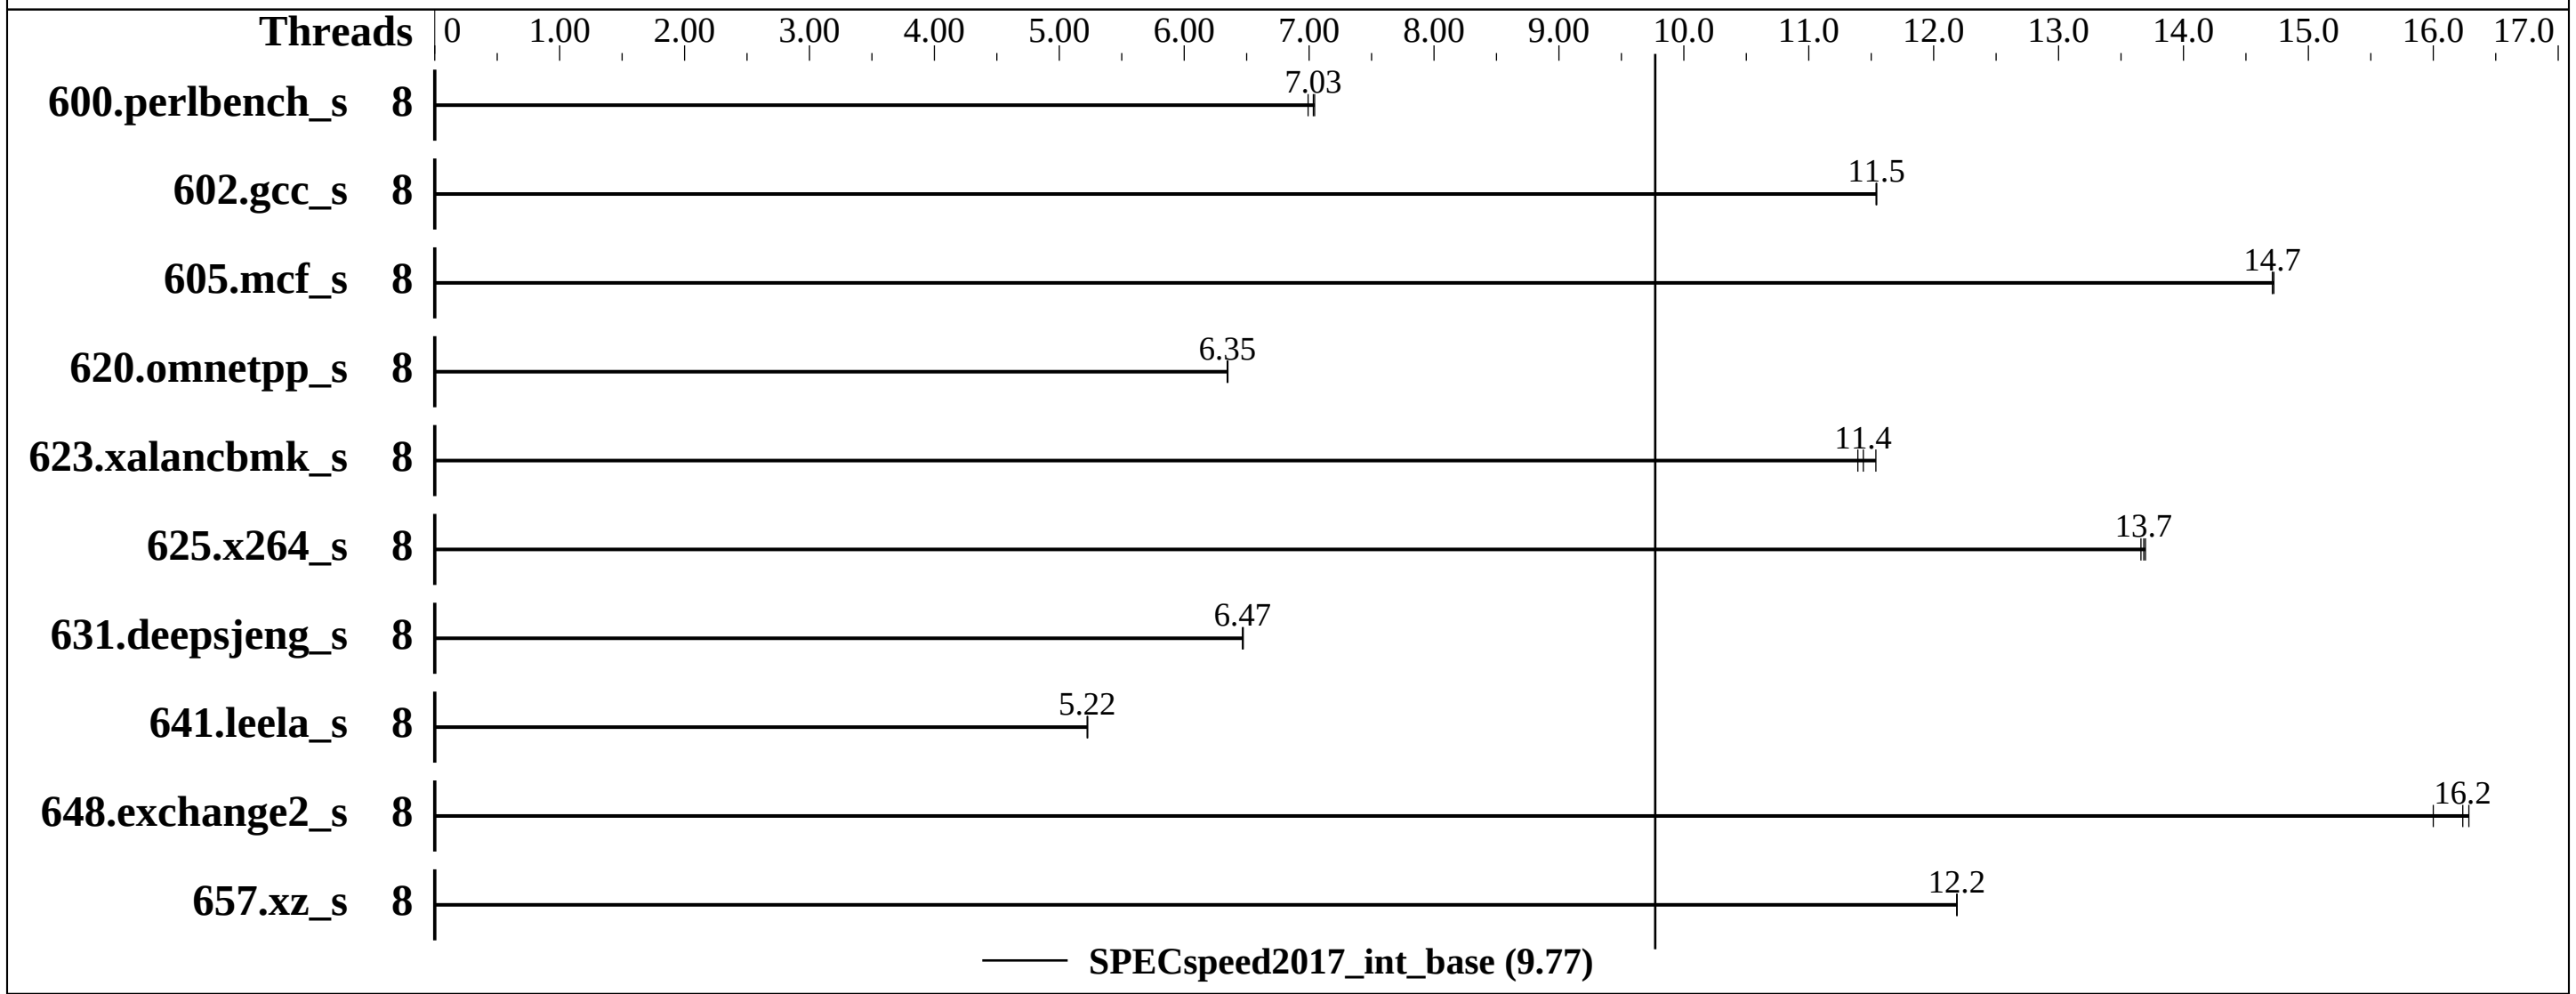

Hardware

CPU Name:	Intel Xeon E-2134
Max MHz.:	4500
Nominal:	3500
Enabled:	4 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	8 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.5 (Maipo) Kernel 3.10.0-862.3.2.el7.x86_64
Compiler:	C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Lenovo BIOS Version ISE105G 1.01 released Oct-2018
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	254	6.99	**252**	**7.03**	252	7.04							
602.gcc_s	8	345	11.5	345	11.5	**345**	**11.5**							
605.mcf_s	8	321	14.7	321	14.7	**321**	**14.7**							
620.omnetpp_s	8	**257**	**6.35**	257	6.35	257	6.34							
623.xalancbmk_s	8	124	11.4	**124**	**11.4**	123	11.5							
625.x264_s	8	**129**	**13.7**	129	13.7	129	13.7							
631.deepsjeng_s	8	**222**	**6.47**	221	6.47	222	6.47							
641.leela_s	8	326	5.23	327	5.22	**327**	**5.22**							
648.exchange2_s	8	184	16.0	**181**	**16.2**	181	16.3							
657.xz_s	8	507	12.2	**507**	**12.2**	507	12.2							

SPECspeed2017_int_base = 9.77

SPECspeed2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic18.0u2/lib/ia32:/home/cpu2017-1.0.5-ic18.0u2/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-32:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-64"
OMP_STACKSIZE = "192M"
 Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Choose Operating Mode set to Custom Mode
CPU P-state Control set to Legacy
 Sysinfo program /home/cpu2017-1.0.5-ic18.0u2/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on localhost.localdomain Mon Nov 26 14:46:44 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz
       1  "physical id"s (chips)
       8 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 4
       siblings  : 8
       physical 0: cores 0 1 2 3

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                8
      On-line CPU(s) list:   0-7
      Thread(s) per core:    2
      Core(s) per socket:    4
      Socket(s):             1
      NUMA node(s):          1
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 158
      Model name:            Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz
      Stepping:              10
      CPU MHz:               4387.603
      CPU max MHz:           4500.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7008.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              8192K
      NUMA node0 CPU(s):     0-7
```

(Continued on next page)

Platform Notes (Continued)

```
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 ibpb ibrs stibp dtherm ida
      arat pln pts hwp hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp ssbd

 /proc/cpuinfo cache data
    cache size : 8192 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7
   node 0 size: 65486 MB
   node 0 free: 63585 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       65926420 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.5 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.5"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-862.3.2.el7.x86_64 #1 SMP Tue May 15 18:22:15 EDT
    2018 x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2017-5754 (Meltdown):          Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Nov 26 14:42

SPEC is set to: /home/cpu2017-1.0.5-ic18.0u2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   365G  6.3G  359G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[ISE105G-1.01]- 10/25/2018
  Memory:
   4x Micron 18ASF2G72AZ-2G6D1 16 GB 2 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
      657.xz_s(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml

Tested with SPEC CPU2017 v1.0.5 on 2018-11-26 01:46:44-0500.
Report generated on 2019-01-15 12:13:25 by CPU2017 PS formatter v6067.
Originally published on 2019-01-15.