



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

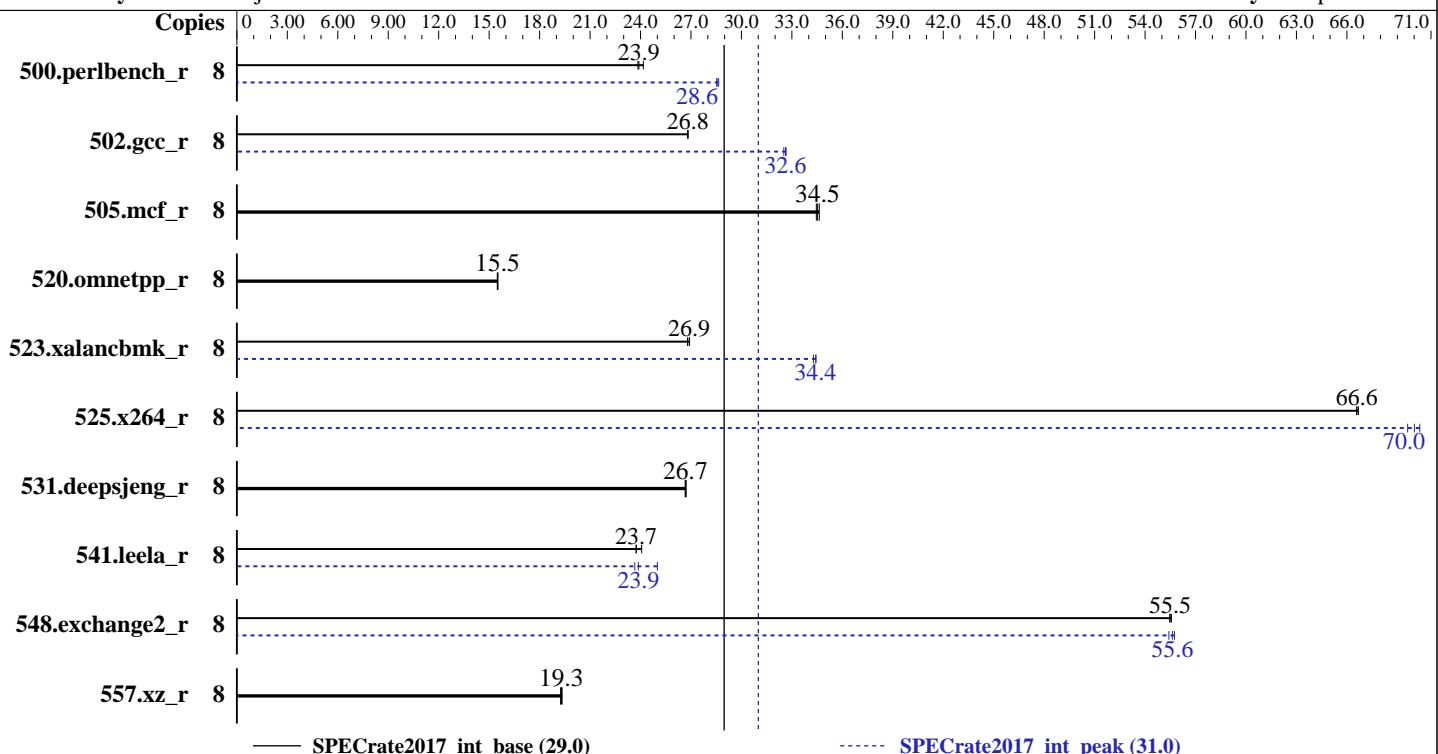

— SPECrate2017\_int\_base (29.0)

----- SPECrate2017\_int\_peak (31.0)

## Hardware

CPU Name: Intel Xeon E3-1280 v6  
Max MHz.: 4200  
Nominal: 3900  
Enabled: 4 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 8 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)  
Storage: 1 x SATA HDD, 2TB, 7200RPM  
Other: None

## Software

OS: SUSE Linux Enterprise Server 15  
4.12.14-23-default  
Compiler: C/C++: Version 19.0.0.117 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 19.0.0.117 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version V5.0.0.11 R1.21.0 for D3373-B1x. Released Nov-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

**SPECrate2017\_int\_base = 29.0**

**SPECrate2017\_int\_peak = 31.0**

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	534	23.8	<b>533</b>	<b>23.9</b>	527	24.2	8	<b>446</b>	<b>28.6</b>	445	28.6	446	28.5
502.gcc_r	8	422	26.8	<b>422</b>	<b>26.8</b>	423	26.8	8	<b>347</b>	<b>32.7</b>	348	32.5	<b>347</b>	<b>32.6</b>
505.mcf_r	8	<b>374</b>	<b>34.5</b>	375	34.5	373	34.6	8	<b>374</b>	<b>34.5</b>	375	34.5	373	34.6
520.omnetpp_r	8	678	15.5	676	15.5	<b>677</b>	<b>15.5</b>	8	678	15.5	676	15.5	<b>677</b>	<b>15.5</b>
523.xalancbmk_r	8	<b>314</b>	<b>26.9</b>	314	26.9	315	26.8	8	245	34.4	246	34.3	<b>245</b>	<b>34.4</b>
525.x264_r	8	210	66.7	<b>210</b>	<b>66.6</b>	210	66.6	8	<b>200</b>	<b>70.0</b>	201	69.6	199	70.3
531.deepsjeng_r	8	344	26.7	<b>344</b>	<b>26.7</b>	343	26.7	8	344	26.7	<b>344</b>	<b>26.7</b>	343	26.7
541.leela_r	8	558	23.7	550	24.1	<b>558</b>	<b>23.7</b>	8	560	23.7	530	25.0	<b>555</b>	<b>23.9</b>
548.exchange2_r	8	377	55.6	378	55.5	<b>378</b>	<b>55.5</b>	8	<b>377</b>	<b>55.6</b>	378	55.4	376	55.8
557.xz_r	8	447	19.3	<b>448</b>	<b>19.3</b>	449	19.2	8	447	19.3	<b>448</b>	<b>19.3</b>	449	19.2

**SPECrate2017\_int\_base = 29.0**

**SPECrate2017\_int\_peak = 31.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo always > /sys/kernel/mm/transparent_hugepage/enabled
echo 1 > /proc/sys/vm/drop_caches
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/ia32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-64"
```

Binaries compiled on a system with 2x Intel Xeon Silver 4108 CPU + 384GB RAM  
memory using SUSE Linux Enterprise Server 12 SP2

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

## General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available via [jemalloc.net](http://jemalloc.net)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-ic19-20181011/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on TX1330M3 Tue Dec 4 18:37:47 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz
  1 "physical id"s (chips)
  8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 4
  siblings   : 8
  physical 0: cores 0 1 2 3
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                8
On-line CPU(s) list:  0-7
Thread(s) per core:   2
Core(s) per socket:   4
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 158
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

## Platform Notes (Continued)

Model name: Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz  
Stepping: 9  
CPU MHz: 3900.000  
CPU max MHz: 4200.0000  
CPU min MHz: 800.0000  
BogoMIPS: 7824.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K  
L3 cache: 8192K  
NUMA node0 CPU(s): 0-7  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb invpcid\_single pt i tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpk rdseed adx smap clflushopt intel\_pt xsaveopt xsavec xgetbv1 xsaves ibpb ibrs stibp dtherm ida arat pln pts hwp hwp\_notify hwp\_act\_window hwp\_epp ssbd

/proc/cpuinfo cache data  
cache size : 8192 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
node 0 cpus: 0 1 2 3 4 5 6 7  
node 0 size: 64033 MB  
node 0 free: 63551 MB  
node distances:  
node 0  
0: 10

From /proc/meminfo  
MemTotal: 65570528 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="SLES"  
VERSION="15"  
VERSION\_ID="15"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15"

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

## Platform Notes (Continued)

```
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux TX1330M3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64  
x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 4 18:36

```
SPEC is set to: /home/Benchmark/speccpu2017-ic19-20181011  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda4        xfs   1.7T   27G  1.7T   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.21.0 for D3373-B1x  
11/20/2018
```

Memory:

```
4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
525.x264_r(base, peak) 557.xz_r(base, peak)  
-----
```

```
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak)  
-----
```

```
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

## Compiler Version Notes (Continued)

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)

=====

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 548.exchange2\_r(base, peak)

=====

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc\_r: icc -m32 -std=c11 -L/opt/intel/compilers\_and\_libraries\_2019/linux/lib/ia32

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk\_r: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2019/linux/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECrate2017\_int\_base = 29.0

SPECrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M3, Intel Xeon E3-1280 v6,  
3.90GHz

SPECCrate2017\_int\_base = 29.0

SPECCrate2017\_int\_peak = 31.0

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-12-04 04:37:46-0500.

Report generated on 2019-01-08 16:43:19 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-08.