# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Pentium G4560, 3.50GHz

SPECrate2017_fp_base = 14.5

SPECrate2017_fp_peak = 14.7

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Dec-2018
**Hardware Availability:** May-2017
**Software Availability:** Sep-2018

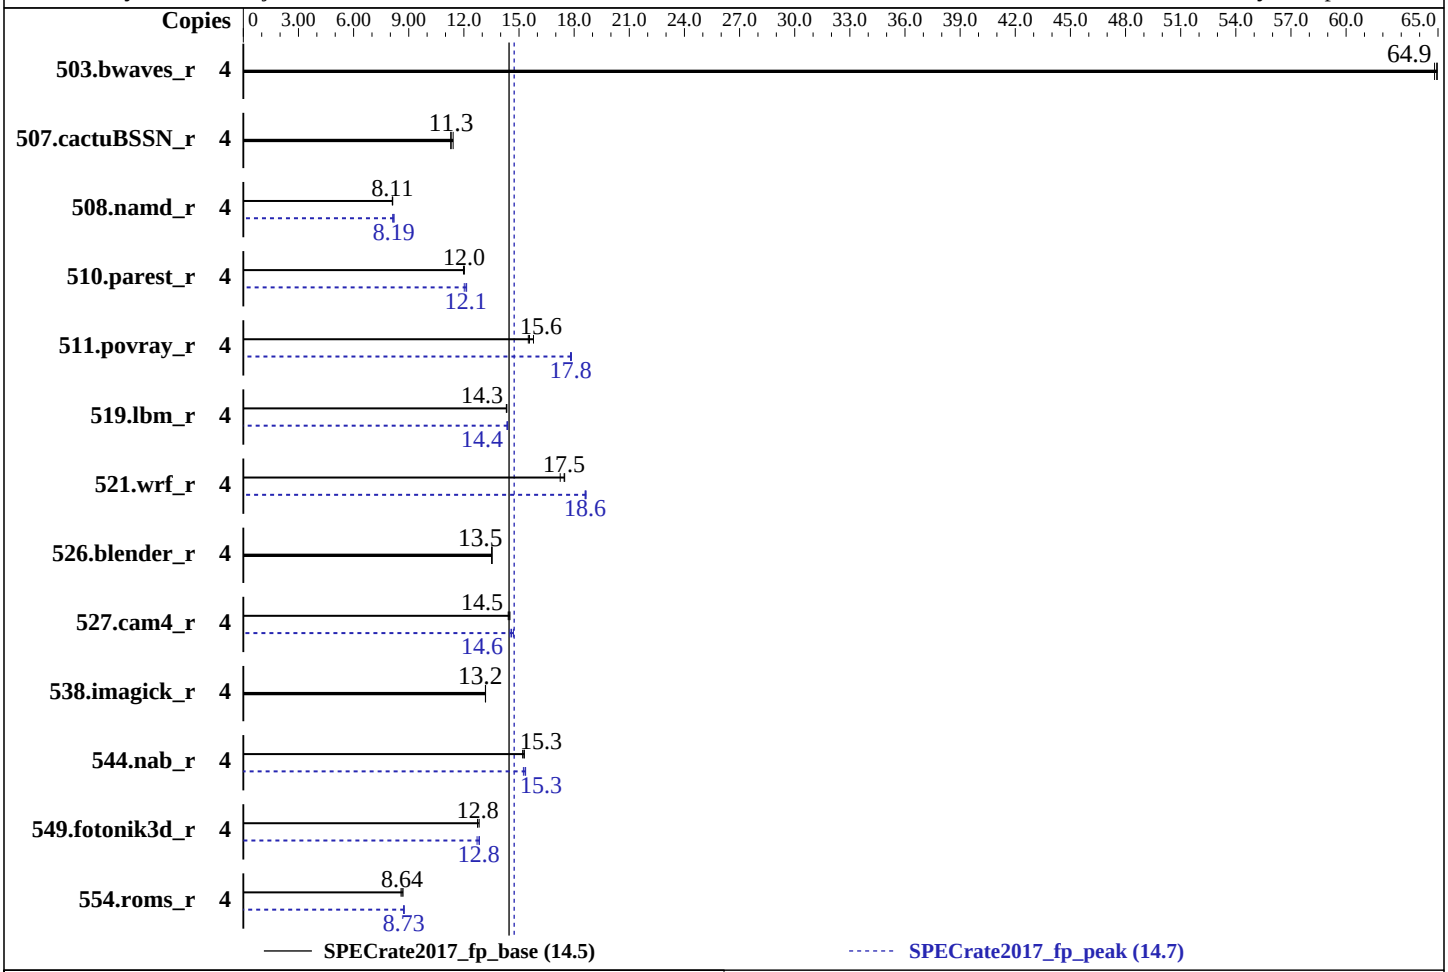


### Hardware

| | |
|---|---|
| CPU Name: | Intel Pentium G4560 |
| Max MHz.: | 3500 |
| Nominal: | 3500 |
| Enabled: | 2 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 256 KB I+D on chip per core |
| L3: | 3 MB I+D on chip per chip |
| Other: | None |
| Memory: | 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E) |
| Storage: | 1 x SATA HDD, 2TB, 7200RPM |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 4.12.14-23-default |
| Compiler: | C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | Fujitsu BIOS Version V5.0.0.11 R1.21.0 for D3373-B1x. Released Nov-2018 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |

# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M3, Intel Pentium G4560, 3.50GHz

SPECrate2017_fp_base = 14.5

SPECrate2017_fp_peak = 14.7

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Dec-2018
**Hardware Availability:** May-2017
**Software Availability:** Sep-2018

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 4 | **618** | **64.9** | 617 | 65.0 | 619 | 64.8 | 4 | **618** | **64.9** | 617 | 65.0 | 619 | 64.8 |
| 507.cactuBSSN_r | 4 | 444 | 11.4 | 449 | 11.3 | **448** | **11.3** | 4 | 444 | 11.4 | 449 | 11.3 | **448** | **11.3** |
| 508.namd_r | 4 | 467 | 8.13 | **469** | **8.11** | 469 | 8.11 | 4 | **464** | **8.19** | 464 | 8.20 | 468 | 8.13 |
| 510.parest_r | 4 | 874 | 12.0 | **871** | **12.0** | 870 | 12.0 | 4 | 861 | 12.2 | 871 | 12.0 | **864** | **12.1** |
| 511.povray_r | 4 | 592 | 15.8 | 602 | 15.5 | **600** | **15.6** | 4 | 523 | 17.9 | 524 | 17.8 | **524** | **17.8** |
| 519.lbm_r | 4 | 294 | 14.3 | **294** | **14.3** | 295 | 14.3 | 4 | 294 | 14.3 | 293 | 14.4 | **294** | **14.4** |
| 521.wrf_r | 4 | **513** | **17.5** | 520 | 17.2 | 512 | 17.5 | 4 | 480 | 18.7 | 482 | 18.6 | **482** | **18.6** |
| 526.blender_r | 4 | **451** | **13.5** | 451 | 13.5 | 450 | 13.5 | 4 | **451** | **13.5** | 451 | 13.5 | 450 | 13.5 |
| 527.cam4_r | 4 | 482 | 14.5 | **484** | **14.5** | 485 | 14.4 | 4 | 482 | 14.5 | **479** | **14.6** | 476 | 14.7 |
| 538.imagick_r | 4 | 755 | 13.2 | **755** | **13.2** | 755 | 13.2 | 4 | 755 | 13.2 | **755** | **13.2** | 755 | 13.2 |
| 544.nab_r | 4 | 443 | 15.2 | **441** | **15.3** | 440 | 15.3 | 4 | 442 | 15.2 | **439** | **15.3** | 438 | 15.4 |
| 549.fotonik3d_r | 4 | **1222** | **12.8** | 1223 | 12.7 | 1215 | 12.8 | 4 | 1214 | 12.8 | 1226 | 12.7 | **1216** | **12.8** |
| 554.roms_r | 4 | 731 | 8.69 | **736** | **8.64** | 741 | 8.58 | 4 | **728** | **8.73** | 726 | 8.75 | 728 | 8.73 |

**SPECrate2017_fp_base = 14.5**

**SPECrate2017_fp_peak = 14.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo always > /sys/kernel/mm/transparent_hugepage/enabled
echo 1 > /proc/sys/vm/drop_caches
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/intel64"

 Binaries compiled on a system with 2x Intel Xeon Silver 4108 CPU + 384GB RAM
 memory using SUSE Linux Enterprise Server 12 SP2
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3 > /proc/sys/vm/drop_caches
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 BIOS configuration:
 Fan Control = Full
 Sysinfo program /home/Benchmark/speccpu2017-ic19-20181011/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on TX1330M3 Mon Dec  3 03:19:38 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
       1  "physical id"s (chips)
       4 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 2
       siblings  : 4
       physical 0: cores 0 1

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              4
      On-line CPU(s) list: 0-3
      Thread(s) per core:  2
      Core(s) per socket:  2
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               158
      Model name:          Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
      Stepping:            9
      CPU MHz:             3500.000
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      CPU max MHz:           3500.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7008.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              3072K
      NUMA node0 CPU(s):     0-3
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg
      cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pti tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
      clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves ibpb ibrs stibp dtherm arat pln
      pts hwp hwp_notify hwp_act_window hwp_epp ssbd

  /proc/cpuinfo cache data
     cache size : 3072 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 1 nodes (0)
    node 0 cpus: 0 1 2 3
    node 0 size: 64034 MB
    node 0 free: 63560 MB
    node distances:
    node   0
      0:  10

  From /proc/meminfo
     MemTotal:       65571408 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15"
        VERSION_ID="15"
        PRETTY_NAME="SUSE Linux Enterprise Server 15"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 uname -a:
    Linux TX1330M3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Dec 2 18:33

 SPEC is set to: /home/Benchmark/speccpu2017-ic19-20181011
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   1.7T   27G  1.7T   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.21.0 for D3373-B1x
       11/20/2018
   Memory:
    4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

## Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

538.imagick_r: `basepeak = yes`

544.nab_r: `Same as 519.lbm_r`

C++ benchmarks:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html`
`http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml`
`http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-12-02 13:19:37-0500.
Report generated on 2019-01-08 16:44:10 by CPU2017 PS formatter v6067.
Originally published on 2019-01-08.