SPEC® CPU2017 Floating Point Rate Result

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL385 Gen10 (3.10 GHz, AMD EPYC 7371)	SPECrate2017_fp_base = 211 SPECrate2017_fp_peak = 215

CPU2017 License:	3	**Test Date:**	Jan-2019
Test Sponsor:	HPE	**Hardware Availability:**	Feb-2019
Tested by:	HPE	**Software Availability:**	Jul-2018

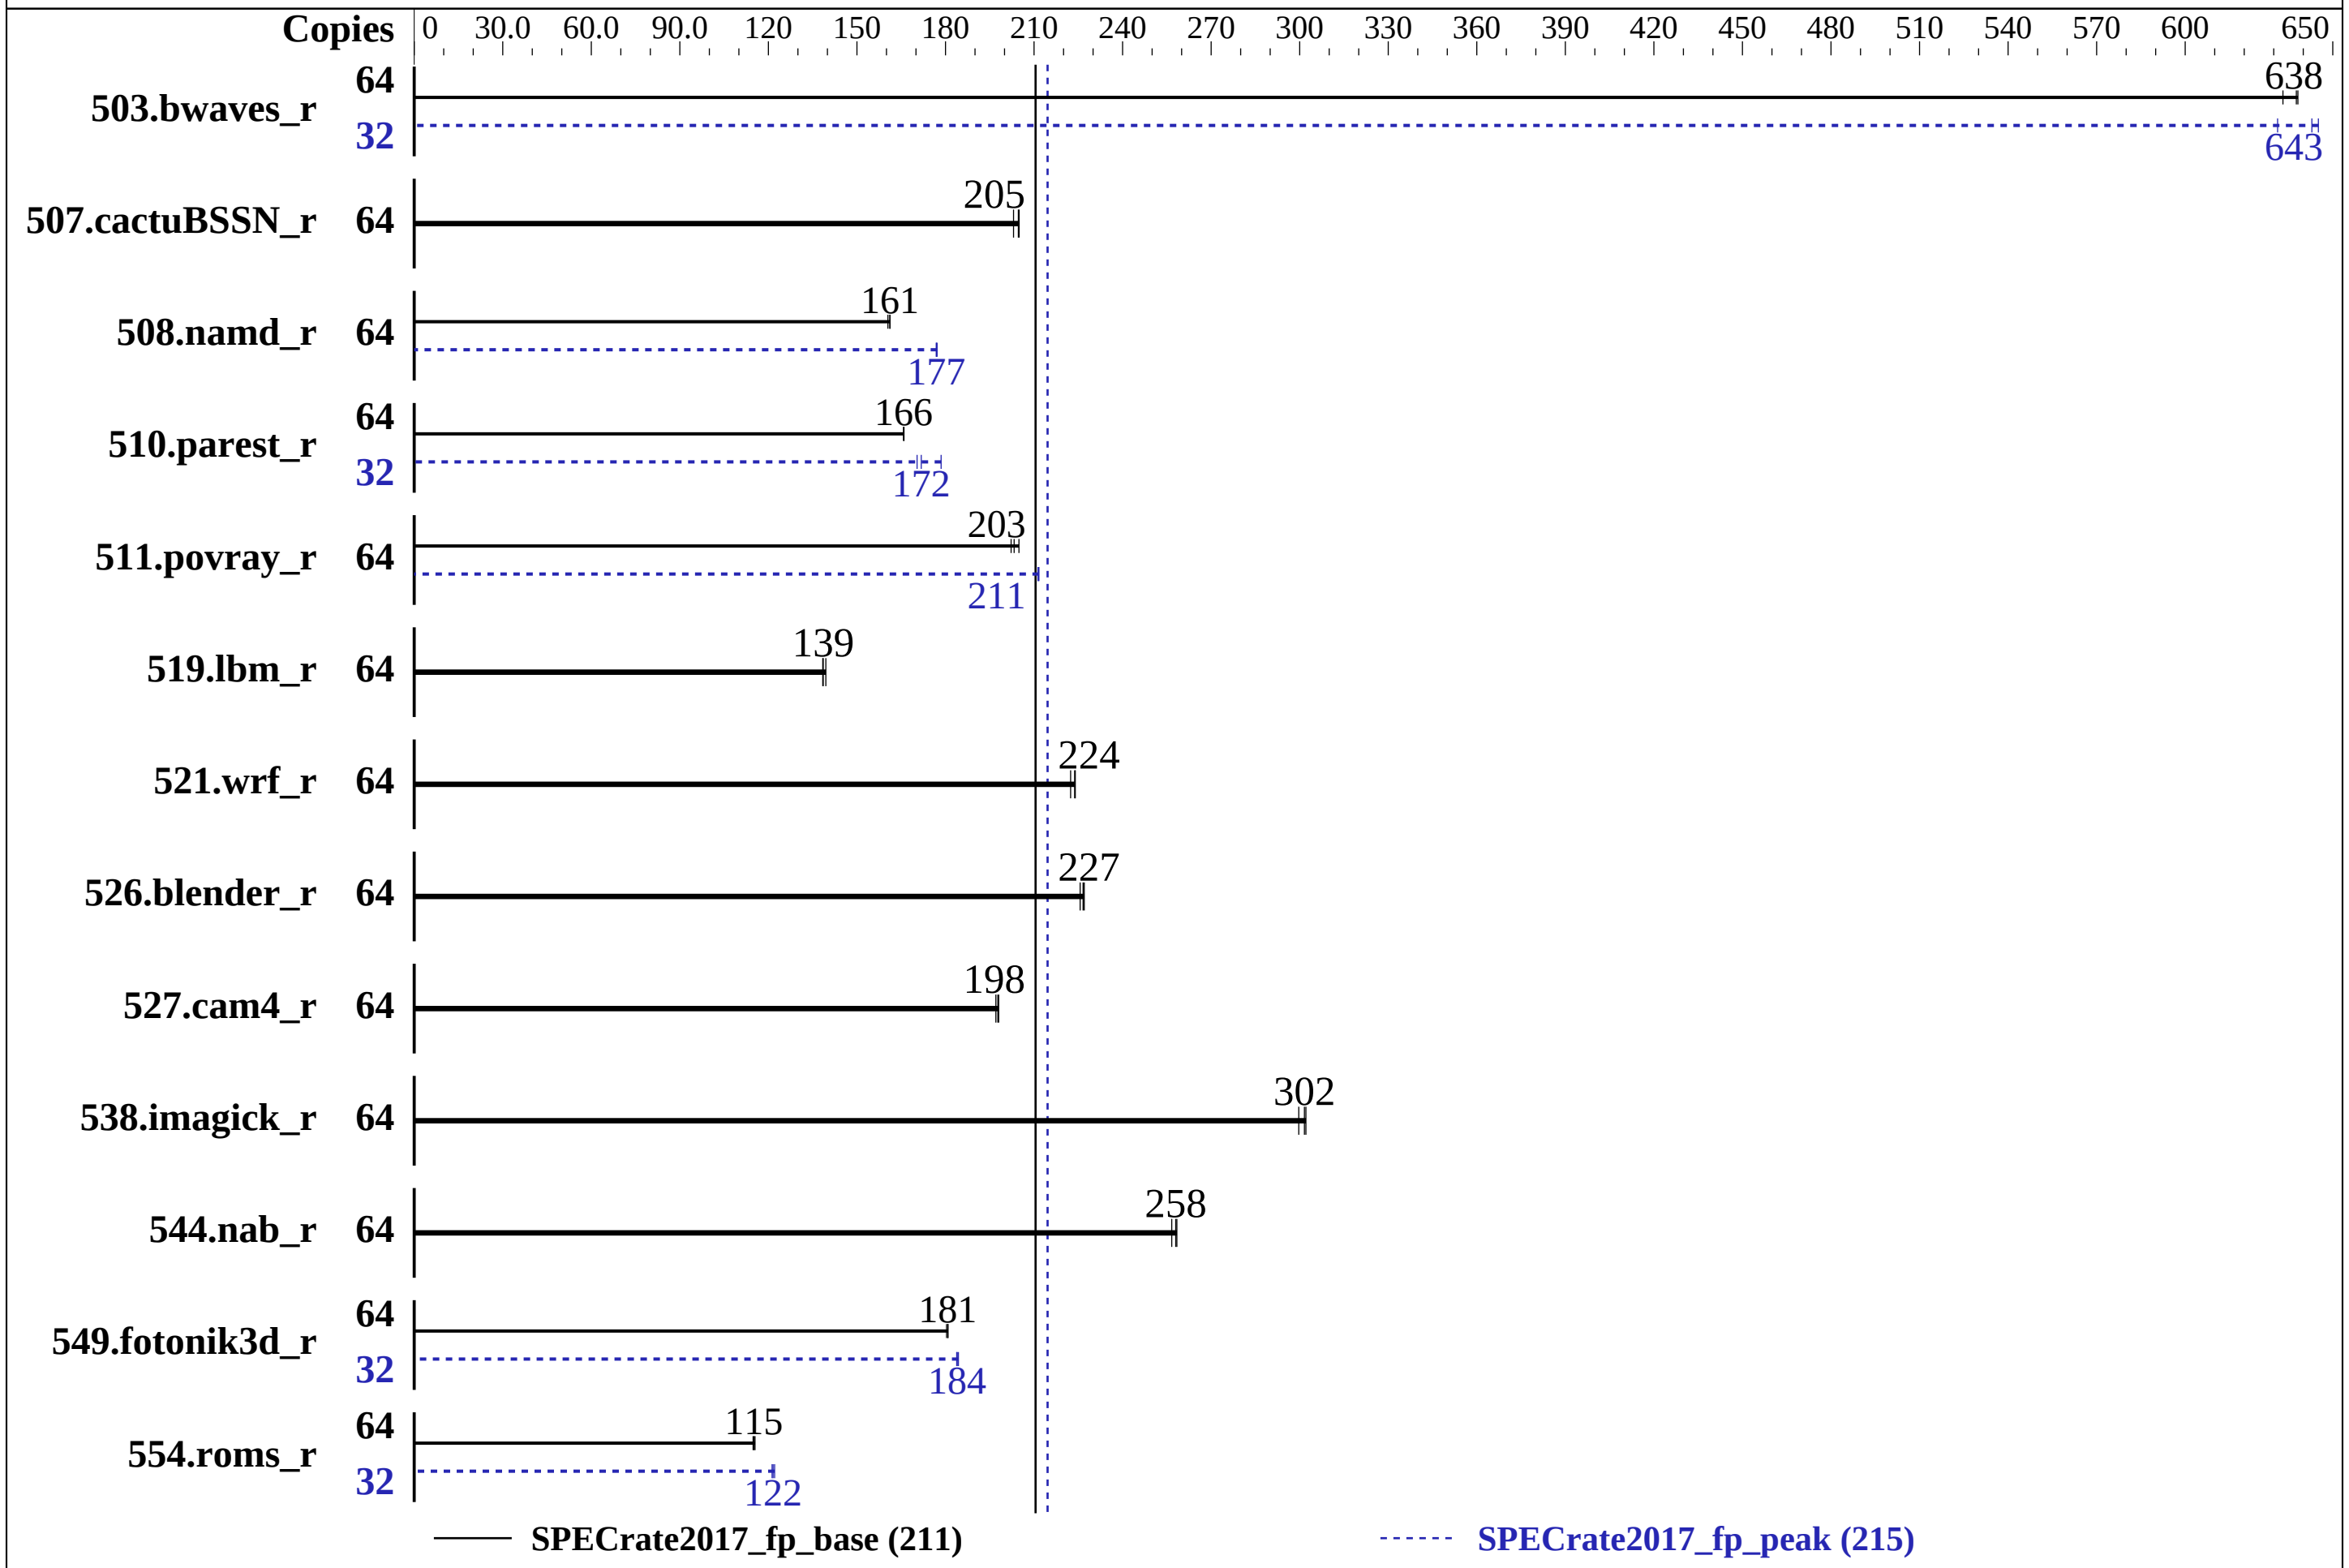

Hardware

CPU Name:	AMD EPYC 7371
Max MHz.:	3800
Nominal:	3100
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Storage:	1 x 400 GB SAS SSD RAID 0
Other:	None

Software

OS:	SUSE linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.132-94.33-default
Compiler:	C/C++: Version 1.0.0 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	No
Firmware:	HPE BIOS Version A40 10/02/2018 released Oct-2018
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator library V4.5.0

SPEC CPU2017 Floating Point Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(3.10 GHz, AMD EPYC 7371)

SPECrate2017_fp_base = 211

SPECrate2017_fp_peak = 215

CPU2017 License: 3		**Test Date:**	Jan-2019
Test Sponsor:	HPE	**Hardware Availability:**	Feb-2019
Tested by:	HPE	**Software Availability:**	Jul-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1014	633	**1006**	**638**	1006	638	32	497	645	508	631	**499**	**643**
507.cactuBSSN_r	64	395	205	399	203	**396**	**205**	64	395	205	399	203	**396**	**205**
508.namd_r	64	379	160	377	161	**377**	**161**	64	344	177	343	177	**344**	**177**
510.parest_r	64	1009	166	**1010**	**166**	1010	166	32	469	179	**487**	**172**	491	170
511.povray_r	64	**735**	**203**	739	202	729	205	64	707	211	**707**	**211**	706	212
519.lbm_r	64	**487**	**139**	484	139	487	138	64	**487**	**139**	484	139	487	138
521.wrf_r	64	640	224	**641**	**224**	645	222	64	640	224	**641**	**224**	645	222
526.blender_r	64	**430**	**227**	429	227	432	226	64	**430**	**227**	429	227	432	226
527.cam4_r	64	**566**	**198**	568	197	565	198	64	**566**	**198**	568	197	565	198
538.imagick_r	64	527	302	**528**	**302**	531	300	64	527	302	**528**	**302**	531	300
544.nab_r	64	**417**	**258**	417	258	420	257	64	**417**	**258**	417	258	420	257
549.fotonik3d_r	64	1379	181	1383	180	**1379**	**181**	32	**678**	**184**	678	184	676	184
554.roms_r	64	**883**	**115**	886	115	881	115	32	416	122	**418**	**122**	419	121

SPECrate2017_fp_base = 211

SPECrate2017_fp_peak = 215

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

(Continued on next page)

Operating System Notes (Continued)

```
Thermal Configuration set to Maximum Cooling
Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
Performance Determinism set to Power Deterministic
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017/amd1704-rate-libs-revD/64;/cpu2017/amd1704-rate-libs-revD/32:"
MALLOC_CONF = "lg_chunk:28"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v4.8.2
in RHEL v7.2 under default conditions.
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
jemalloc uses environment variable MALLOC_CONF
with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use
for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log
base 2). For example,
lg_chunk:21 sets the default chunk size to 2^21 =
2MiB.
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
 Processor Power and Utilization Monitoring set to Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
Sysinfo program /cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-1gdj Thu Jan 24 18:55:39 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7371 16-Core Processor
      2  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
      physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                64
     On-line CPU(s) list:   0-63
     Thread(s) per core:    2
     Core(s) per socket:    16
     Socket(s):             2
     NUMA node(s):          8
     Vendor ID:             AuthenticAMD
     CPU family:            23
     Model:                 1
     Model name:            AMD EPYC 7371 16-Core Processor
     Stepping:              2
     CPU MHz:               3100.000
     CPU max MHz:           3100.0000
     CPU min MHz:           2500.0000
     BogoMIPS:              6187.96
     Virtualization:        AMD-V
     L1d cache:             32K
     L1i cache:             64K
     L2 cache:              512K
     L3 cache:              8192K
     NUMA node0 CPU(s):     0-3,32-35
     NUMA node1 CPU(s):     4-7,36-39
     NUMA node2 CPU(s):     8-11,40-43
     NUMA node3 CPU(s):     12-15,44-47
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node4 CPU(s):     16-19,48-51
      NUMA node5 CPU(s):     20-23,52-55
      NUMA node6 CPU(s):     24-27,56-59
      NUMA node7 CPU(s):     28-31,60-63
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate ssbd retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
      bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
      irperf ibpb overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 32 33 34 35
   node 0 size: 128840 MB
   node 0 free: 128646 MB
   node 1 cpus: 4 5 6 7 36 37 38 39
   node 1 size: 129022 MB
   node 1 free: 128830 MB
   node 2 cpus: 8 9 10 11 40 41 42 43
   node 2 size: 129022 MB
   node 2 free: 128847 MB
   node 3 cpus: 12 13 14 15 44 45 46 47
   node 3 size: 129022 MB
   node 3 free: 128857 MB
   node 4 cpus: 16 17 18 19 48 49 50 51
   node 4 size: 129022 MB
   node 4 free: 128871 MB
   node 5 cpus: 20 21 22 23 52 53 54 55
   node 5 size: 129022 MB
   node 5 free: 128869 MB
   node 6 cpus: 24 25 26 27 56 57 58 59
   node 6 size: 129022 MB
   node 6 free: 128871 MB
   node 7 cpus: 28 29 30 31 60 61 62 63
   node 7 size: 116925 MB
   node 7 free: 116774 MB
   node distances:
   node   0   1   2   3   4   5   6   7
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  16  16  16  32  32  32  32
     1:  16  10  16  16  32  32  32  32
     2:  16  16  10  16  32  32  32  32
     3:  16  16  16  10  32  32  32  32
     4:  32  32  32  32  10  16  16  16
     5:  32  32  32  32  16  10  16  16
     6:  32  32  32  32  16  16  10  16
     7:  32  32  32  32  16  16  16  10

 From /proc/meminfo
    MemTotal:       1044376020 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 3
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP3"
       VERSION_ID="12.3"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp3"

 uname -a:
    Linux linux-1gdj 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

 run-level 3 Jan 24 10:12

 SPEC is set to: /cpu2017
    Filesystem     Type   Size  Used Avail Use% Mounted on
```

(Continued on next page)

Platform Notes (Continued)

```
   /dev/sda3      btrfs  371G   13G  357G   4% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS HPE A40 10/02/2018
   Memory:
    16x UNKNOWN NOT AVAILABLE
    16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
      peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`clang gfortran`

Benchmarks using both Fortran and C:
`clang gfortran`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang gfortran`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64`
526.blender_r: `-funsigned-char -D__BOOL_DEFINED -DSPEC_LP64`
527.cam4_r: `-DSPEC_CASE_FLAG -DSPEC_LP64`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm  -disable-vect-cmp -z muldefs
-ljemalloc
```

C++ benchmarks:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm  -disable-vect-cmp
-z muldefs -ljemalloc
```

Fortran benchmarks:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -mavx -madx -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm  -disable-vect-cmp -mavx -madx
-funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm  -disable-vect-cmp
-finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
```
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm  -disable-vect-cmp
-finline-aggressive -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
```

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`clang gfortran`

Benchmarks using both Fortran and C:
`clang gfortran`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang gfortran`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r: `basepeak = yes`

C++ benchmarks:
`-flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1 -finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc`

Fortran benchmarks:
`-flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant -fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc -lgfortran -lamdlibm`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-flto -Wl,-plugin-opt=-merge-constant -Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays -mllvm -inline-threshold=1000 -finline-aggressive -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-01-24 19:55:38-0500.
Report generated on 2019-03-19 14:58:24 by CPU2017 PS formatter v6067.
Originally published on 2019-03-19.