SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10
(3.10 GHz, AMD EPYC 7371)

SPECspeed2017_int_base = 8.15

SPECspeed2017_int_peak = 8.36

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2019
Hardware Availability: Feb-2019
Software Availability: Jul-2018

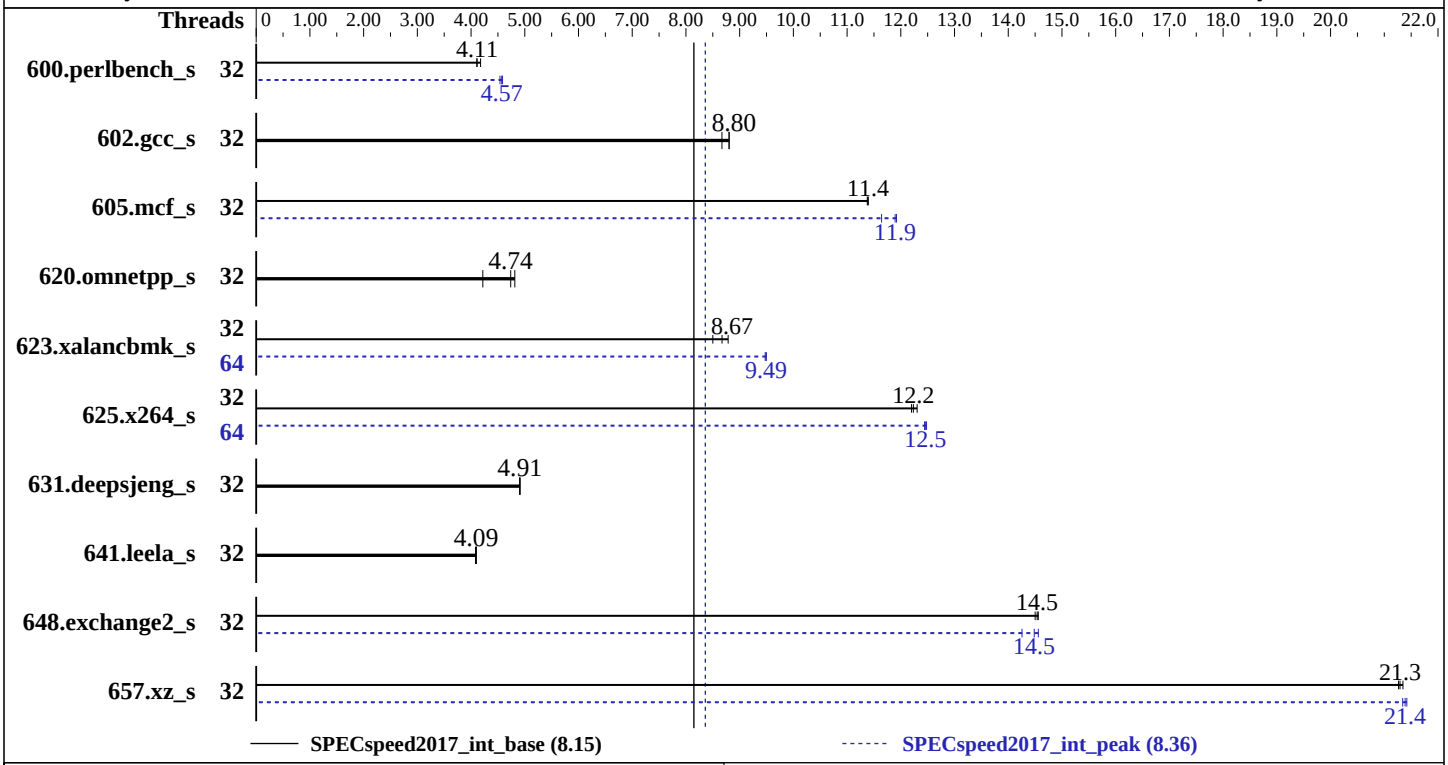

Hardware

CPU Name:	AMD EPYC 7371
Max MHz.:	3800
Nominal:	3100
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Storage:	1 x 400 GB SAS SSD RAID 0
Other:	None

Software

OS:	SUSE linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.132-94.33-default
Compiler:	C/C++: Version 1.2.1 of AOCC Fortran: Version 4.8.2 of GCC
Parallel:	Yes
Firmware:	HPE BIOS Version A40 10/02/2018 released Oct-2018
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator library V4.5.0

SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10
(3.10 GHz, AMD EPYC 7371)

SPECspeed2017_int_base = 8.15

SPECspeed2017_int_peak = 8.36

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2019
Hardware Availability: Feb-2019
Software Availability: Jul-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	**432**	**4.11**	425	4.18	432	4.11	32	387	4.59	**388**	**4.57**	391	4.54
602.gcc_s	32	459	8.67	**452**	**8.80**	452	8.80	32	459	8.67	**452**	**8.80**	452	8.80
605.mcf_s	32	415	11.4	**414**	**11.4**	414	11.4	32	406	11.6	**397**	**11.9**	396	11.9
620.omnetpp_s	32	387	4.22	339	4.81	**344**	**4.74**	32	387	4.22	339	4.81	**344**	**4.74**
623.xalancbmk_s	32	**163**	**8.67**	161	8.79	167	8.50	64	150	9.47	149	9.50	**149**	**9.49**
625.x264_s	32	143	12.3	**144**	**12.2**	145	12.2	64	141	12.5	142	12.4	**142**	**12.5**
631.deepsjeng_s	32	**292**	**4.91**	292	4.90	292	4.91	32	**292**	**4.91**	292	4.90	292	4.91
641.leela_s	32	416	4.10	418	4.08	**417**	**4.09**	32	416	4.10	418	4.08	**417**	**4.09**
648.exchange2_s	32	203	14.5	**202**	**14.5**	202	14.6	32	206	14.3	202	14.6	**203**	**14.5**
657.xz_s	32	290	21.3	291	21.3	**290**	**21.3**	32	**289**	**21.4**	290	21.3	289	21.4

SPECspeed2017_int_base = 8.15

SPECspeed2017_int_peak = 8.36

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.2 was used to leverage AOCC optimizers
with gfortran. It is available here:
http://developer.amd.com/amd-aocc/
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
BIOS Configuration
Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
Thermal Configuration set to Maximum Cooling
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Performance Determinism set to Power Deterministic
Workload Power and Utilization Monitoring set to Disabled
```

(Continued on next page)

Operating System Notes (Continued)

```
Minimum Processor Idle Power core C-State set to C6 State
```

General Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/cpu2017/amd1806-speed-libs-revA/64:/cpu2017/amd1806-speed-libs-revA/32:"
OMP_PROC_BIND = "true"
OMP_STACKSIZE = "192M"
OMP_WAIT_POLICY = "active"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v4.8.2
in RHEL v7.2 under default conditions.
jemalloc: sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
jemalloc uses environment variable MALLOC_CONF
with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use
for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log
base 2). For example,
lg_chunk:21 sets the default chunk size to 2^21 =
2MiB.
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Throughput Compute
 Processor Power and Utilization Monitoring set to Disabled
 Sysinfo program /cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-1gdj Sun Dec 31 20:30:24 2000

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
```

(Continued on next page)

Platform Notes (Continued)

```
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : AMD EPYC 7371 16-Core Processor
        2  "physical id"s (chips)
        64 "processors"
     cores, siblings (Caution: counting these is hw and system dependent. The following
     excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
        cpu cores : 16
        siblings  : 32
        physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
        physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

  From lscpu:
       Architecture:          x86_64
       CPU op-mode(s):        32-bit, 64-bit
       Byte Order:            Little Endian
       CPU(s):                64
       On-line CPU(s) list:   0-63
       Thread(s) per core:    2
       Core(s) per socket:    16
       Socket(s):             2
       NUMA node(s):          8
       Vendor ID:             AuthenticAMD
       CPU family:            23
       Model:                 1
       Model name:            AMD EPYC 7371 16-Core Processor
       Stepping:              2
       CPU MHz:               3100.000
       CPU max MHz:           3100.0000
       CPU min MHz:           2500.0000
       BogoMIPS:              6188.26
       Virtualization:        AMD-V
       L1d cache:             32K
       L1i cache:             64K
       L2 cache:              512K
       L3 cache:              8192K
       NUMA node0 CPU(s):     0-3,32-35
       NUMA node1 CPU(s):     4-7,36-39
       NUMA node2 CPU(s):     8-11,40-43
       NUMA node3 CPU(s):     12-15,44-47
       NUMA node4 CPU(s):     16-19,48-51
       NUMA node5 CPU(s):     20-23,52-55
       NUMA node6 CPU(s):     24-27,56-59
       NUMA node7 CPU(s):     28-31,60-63
       Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
```

(Continued on next page)

Platform Notes (Continued)

```
      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
      hw_pstate ssbd retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
      bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
      irperf ibpb overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 32 33 34 35
    node 0 size: 128840 MB
    node 0 free: 128670 MB
    node 1 cpus: 4 5 6 7 36 37 38 39
    node 1 size: 129022 MB
    node 1 free: 128815 MB
    node 2 cpus: 8 9 10 11 40 41 42 43
    node 2 size: 129022 MB
    node 2 free: 128830 MB
    node 3 cpus: 12 13 14 15 44 45 46 47
    node 3 size: 129022 MB
    node 3 free: 128849 MB
    node 4 cpus: 16 17 18 19 48 49 50 51
    node 4 size: 129022 MB
    node 4 free: 128924 MB
    node 5 cpus: 20 21 22 23 52 53 54 55
    node 5 size: 129022 MB
    node 5 free: 128918 MB
    node 6 cpus: 24 25 26 27 56 57 58 59
    node 6 size: 129022 MB
    node 6 free: 128923 MB
    node 7 cpus: 28 29 30 31 60 61 62 63
    node 7 size: 116925 MB
    node 7 free: 116825 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  16  16  16  32  32  32  32
      1:  16  10  16  16  32  32  32  32
      2:  16  16  10  16  32  32  32  32
      3:  16  16  16  10  32  32  32  32
      4:  32  32  32  32  10  16  16  16
      5:  32  32  32  32  16  10  16  16
```

(Continued on next page)

Platform Notes (Continued)

```
     6:  32  32  32  32  16  16  10  16
     7:  32  32  32  32  16  16  16  10

  From /proc/meminfo
     MemTotal:       1044375828 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP3

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 3
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP3"
        VERSION_ID="12.3"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp3"

  uname -a:
     Linux linux-1gdj 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Not affected
  CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

  run-level 3 Dec 31 18:01

  SPEC is set to: /cpu2017
     Filesystem     Type   Size  Used Avail Use% Mounted on
     /dev/sda3      btrfs  371G   13G  357G   4% /

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
```

(Continued on next page)

Platform Notes (Continued)

```
   BIOS HPE A40 10/02/2018
   Memory:
    16x UNKNOWN NOT AVAILABLE
    16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CXXC 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
  b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm
  18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM
  AOCC.LLVM.1.2.1.B29.2018_05_14)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.2.1/AOCC-1.2.1-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
      625.x264_s(base) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
  b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm
  18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM
  AOCC.LLVM.1.2.1.B29.2018_05_14)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.2.1/AOCC-1.2.1-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 620.omnetpp_s(base, peak) 623.xalancbmk_s(base) 631.deepsjeng_s(base,
      peak) 641.leela_s(base)
------------------------------------------------------------------------------
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
  b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm
  18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM
  AOCC.LLVM.1.2.1.B29.2018_05_14)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.2.1/AOCC-1.2.1-Compiler/bin
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
CC   600.perlbench_s(peak) 625.x264_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
  b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm
  18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM
  AOCC.LLVM.1.2.1.B29.2018_05_14)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.2.1/AOCC-1.2.1-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
CXXC 641.leela_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.1.2.1.B29.2018_05_14 clang version 6.0.0 (CLANG:
  b6b3d31d6df08fb7da935a28842b39b7b3c2c55b) (llvm/cpu/llvm
  18855c80ed252fc4ba4ac41e2086627ef2bddd04) (based on LLVM
  AOCC.LLVM.1.2.1.B29.2018_05_14)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.2.1/AOCC-1.2.1-Compiler/bin
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Base Portability Flags

600.perlbench_s: `-DSPEC_LINUX_X64 -DSPEC_LP64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LINUX -DSPEC_LP64`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -O3
-ffast-math -march=znver1 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm  -enable-gvn-hoist -mllvm -function-specialize -z muldefs
-lamdlibm -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc
```

C++ benchmarks:
```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto -fuse-ld=lld
-Wl,-mllvm -Wl,-function-specialize -O3 -march=znver1 -ffast-math
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -fremap-arrays
-mllvm -inline-threshold=1000 -z muldefs -lamdlibm -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -ljemalloc
```

Fortran benchmarks:
```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -O3
-funroll-loops -ffast-math -z muldefs -lamdlibm -fplugin=dragonegg.so
-specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -ljemalloc -lgfortran
```

Base Other Flags

C benchmarks:
`-Wno-return-type -DUSE_OPENMP`

C++ benchmarks:
`-Wno-return-type -DUSE_OPENMP`

Fortran benchmarks:
`-DUSE_OPENMP -Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`clang gfortran`

Peak Portability Flags

600.perlbench_s: `-DSPEC_LINUX_X64 -DSPEC_LP64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LINUX -D_FILE_OFFSET_BITS=64`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

600.perlbench_s: `-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize`
`-fprofile-instr-generate`(pass 1)
`-fprofile-instr-use`(pass 2) `-Ofast -march=znver1`

(Continued on next page)

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization
-mllvm -enable-vectorize-compares -z muldefs -lamdlibm
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc

602.gcc_s: basepeak = yes

605.mcf_s: -flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize
-Ofast -march=znver1 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization
-mllvm -enable-vectorize-compares -z muldefs -lamdlibm
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -ljemalloc

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 605.mcf_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m32 -fuse-ld=lld -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-flto -Wl,-mllvm -Wl,-function-specialize -Ofast
-march=znver1 -flv-function-specialization
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -z muldefs -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -libs-revA/32 -ljemalloc

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -fuse-ld=lld -Wl,-mllvm -Wl,-function-specialize -O3
-funroll-loops -ffast-math -z muldefs -lamdlibm -fplugin=dragonegg.so
-specs=integrated-as.specs

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -ljemalloc -lgfortran

Peak Other Flags

C benchmarks:
-Wno-return-type -DUSE_OPENMP

C++ benchmarks (except as noted below):
-Wno-return-type -DUSE_OPENMP

623.xalancbmk_s: -Wno-return-type -DUSE_OPENMP
-L/root/work/cpu2017/v105/amd1806-speed

Fortran benchmarks:
-DUSE_OPENMP -Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml
http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2000-12-31 21:30:23-0500.
Report generated on 2019-02-19 13:57:02 by CPU2017 PS formatter v6067.
Originally published on 2019-02-19.