SPEC® CPU2017 Floating Point Rate Result

Epsylon Sp. z o.o. Sp. Komandytowa	SPECrate2017_fp_base = 52.2
eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)	SPECrate2017_fp_peak = 52.9

CPU2017 License:	9081	**Test Date:**	Mar-2019
Test Sponsor:	Epsylon Sp. z o.o. Sp. Komandytowa	**Hardware Availability:**	Sep-2017
Tested by:	Epsylon Sp. z o.o. Sp. Komandytowa	**Software Availability:**	Mar-2018

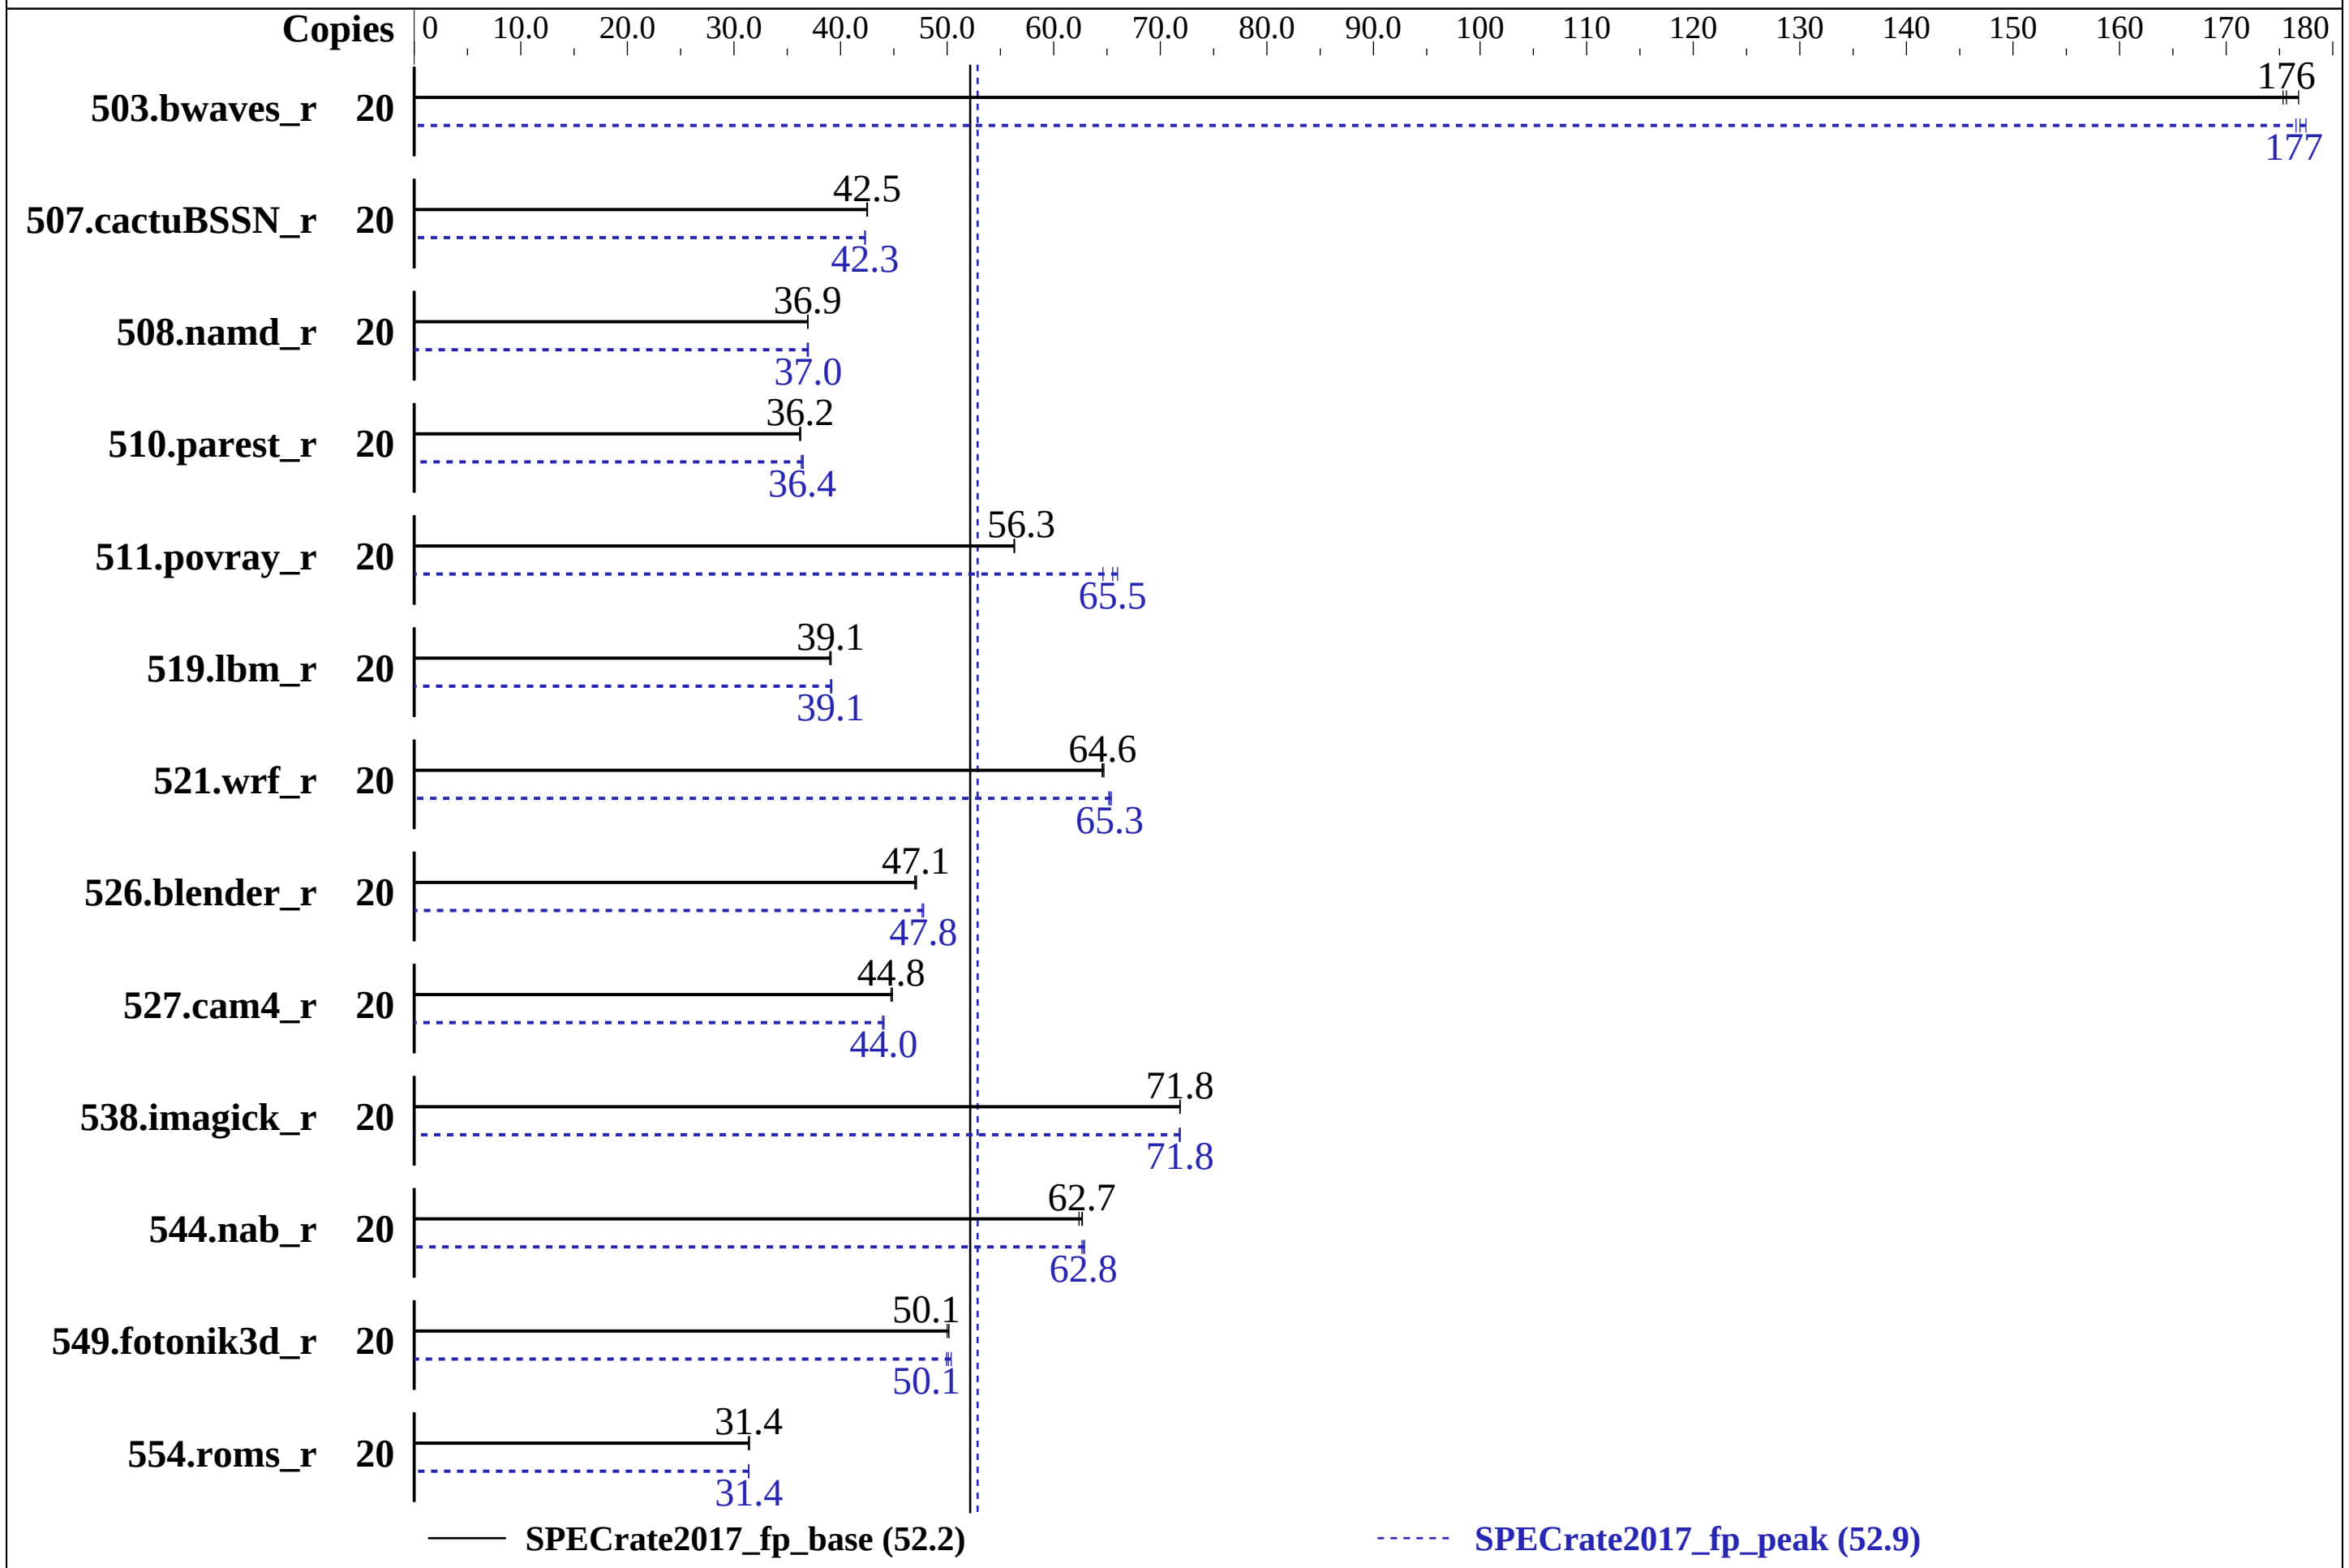

Hardware

CPU Name:	Intel Xeon Silver 4114
Max MHz.:	3000
Nominal:	2200
Enabled:	10 cores, 1 chip, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	13.75 MB I+D on chip per chip
Other:	None
Memory:	192 GB (6 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage:	1 x 960 GB SSD SATA III
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.4 (Maipo) 3.10.0-693.21.1.el7.x86_64
Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version BIOS 3.0a released Jan-2019
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Rate Result

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 225 RE1 (Intel Xeon Silver 4114, 2.20 GHz)

SPECrate2017_fp_base = 52.2

SPECrate2017_fp_peak = 52.9

CPU2017 License:	9081	**Test Date:**	Mar-2019
Test Sponsor:	Epsylon Sp. z o.o. Sp. Komandytowa	**Hardware Availability:**	Sep-2017
Tested by:	Epsylon Sp. z o.o. Sp. Komandytowa	**Software Availability:**	Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	20	**1142**	**176**	1134	177	1144	175	20	**1134**	**177**	1130	177	1136	177
507.cactuBSSN_r	20	**596**	**42.5**	595	42.5	596	42.5	20	**599**	**42.3**	598	42.3	599	42.3
508.namd_r	20	**515**	**36.9**	515	36.9	514	36.9	20	514	37.0	**514**	**37.0**	515	36.9
510.parest_r	20	1443	36.3	**1445**	**36.2**	1447	36.2	20	**1436**	**36.4**	1441	36.3	1434	36.5
511.povray_r	20	**829**	**56.3**	829	56.3	830	56.3	20	708	66.0	**713**	**65.5**	723	64.6
519.lbm_r	20	541	39.0	539	39.1	**539**	**39.1**	20	**539**	**39.1**	538	39.2	539	39.1
521.wrf_r	20	694	64.5	692	64.7	**693**	**64.6**	20	685	65.4	**686**	**65.3**	687	65.2
526.blender_r	20	**647**	**47.1**	646	47.1	649	47.0	20	**638**	**47.8**	639	47.6	637	47.8
527.cam4_r	20	**782**	**44.8**	782	44.7	780	44.9	20	**794**	**44.0**	796	43.9	794	44.1
538.imagick_r	20	**692**	**71.8**	692	71.8	692	71.8	20	693	71.8	**692**	**71.8**	692	71.9
544.nab_r	20	537	62.7	**537**	**62.7**	540	62.4	20	**536**	**62.8**	535	62.9	537	62.6
549.fotonik3d_r	20	1559	50.0	1554	50.2	**1554**	**50.1**	20	1560	49.9	**1555**	**50.1**	1547	50.4
554.roms_r	20	1010	31.5	1013	31.4	**1012**	**31.4**	20	1013	31.4	1012	31.4	**1012**	**31.4**

SPECrate2017_fp_base = **52.2**

SPECrate2017_fp_peak = **52.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017.1.0/lib/intel64:/cpu2017.1.0/je5.0.1-32:/cpu2017.1.0/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32 GB RAM
 memory using Redhat Enterprise Linux 7.4

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Turbo Mode = Enable
Enhanced Halt State (C1E) = Disable
CPU C6 report = Disabled
Package C State = No limit
Software Controlled T-States = Disable
Hyper-Threading (All) = Enable
Enforce POR = Disable
Memory Frequency = 2400
Patrol Scrub = Disabled
IMC Interleaving = Auto
SNC = Disabled

Sysinfo program /cpu2017.1.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on SUT Fri Mar  1 23:08:55 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
      1  "physical id"s (chips)
      20 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                20
     On-line CPU(s) list:   0-19
```

(Continued on next page)

Platform Notes (Continued)

```
      Thread(s) per core:    2
      Core(s) per socket:    10
      Socket(s):             1
      NUMA node(s):          1
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
      Stepping:              4
      CPU MHz:               2201.000
      CPU max MHz:           2201.0000
      CPU min MHz:           800.0000
      BogoMIPS:              4400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              14080K
      NUMA node0 CPU(s):     0-19
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
      cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
      intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

 /proc/cpuinfo cache data
    cache size : 14080 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
   node 0 size: 195231 MB
   node 0 free: 190022 MB
   node distances:
   node   0
     0:  10

 From /proc/meminfo
    MemTotal:       196471408 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.4 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VARIANT="Server"
      VARIANT_ID="server"
      VERSION_ID="7.4"
      PRETTY_NAME="Red Hat Enterprise Linux"
   redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
   Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
   x86_64 GNU/Linux

run-level 3 Mar 1 12:32

SPEC is set to: /cpu2017.1.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4  825G   89G  695G  12% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS American Megatrends Inc. 3.0a 01/12/2019
  Memory:
   6x NO DIMM NO DIMM
   6x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
CC   519.lbm_r(peak) 544.nab_r(peak)
------------------------------------------------------------------------------
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak) 510.parest_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak) 526.blender_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
FC   507.cactuBSSN_r(peak)
------------------------------------------------------------------------------
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`
`-ffinite-math-only -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
`-ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`
`-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs`
`-align array32byte`

Benchmarks using both Fortran and C:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`
`-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs`
`-align array32byte`

Benchmarks using both C and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`
`-ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`
`-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs`
`-align array32byte`

Base Other Flags

C benchmarks:
`-m64 -std=c11`

C++ benchmarks:
`-m64`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using both C and C++:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:
-m64 -std=c11

C++ benchmarks:
-m64

Fortran benchmarks:
-m64

Benchmarks using both Fortran and C:
-m64 -std=c11

Benchmarks using both C and C++:
-m64 -std=c11

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
-m64 -std=c11

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html
http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml
http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevA-Mar-2018-For-Supermicro-Platform.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-03-01 17:08:54-0500.
Report generated on 2019-03-19 14:58:55 by CPU2017 PS formatter v6067.
Originally published on 2019-03-19.