



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 10.6

Huawei 1288H V5 (Intel Xeon Platinum 8280)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Date: Feb-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

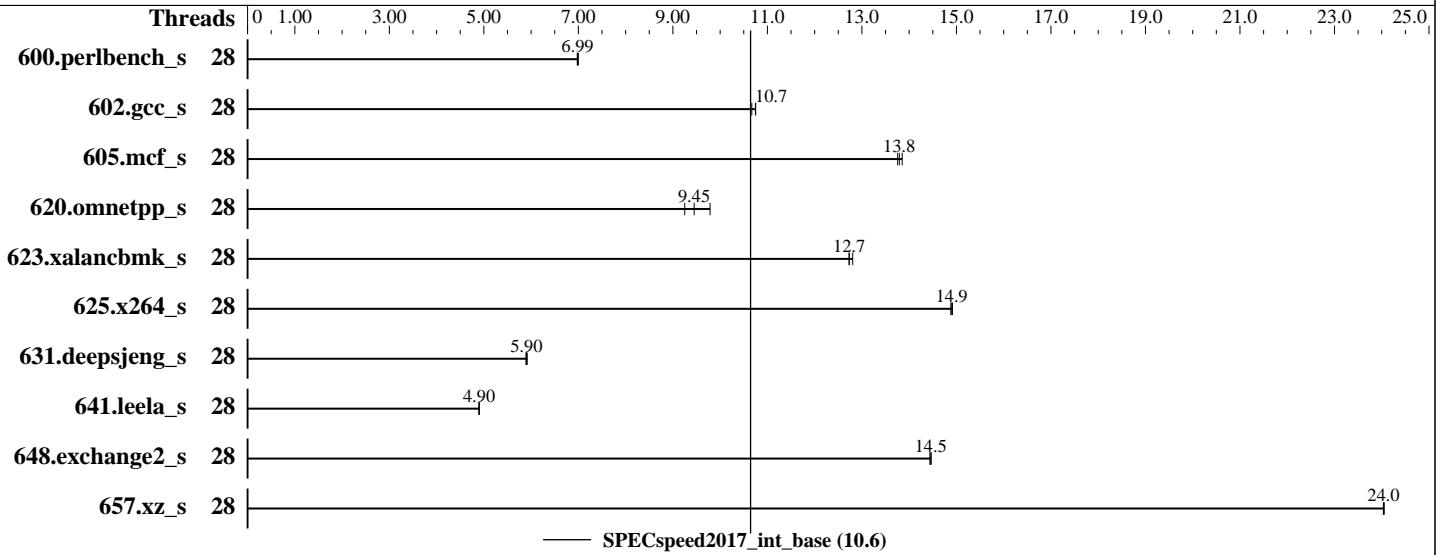

— SPECspeed2017\_int\_base (10.6)

## Hardware

CPU Name: Intel Xeon Platinum 8280  
Max MHz.: 4000  
Nominal: 2700  
Enabled: 28 cores, 1 chip  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 1 x 1200 GB SAS, 10000 RPM  
Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64) 4.12.14-94.41-default  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
Parallel: Yes  
Firmware: Version 6.36 Released Feb-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

**SPECspeed2017\_int\_base = 10.6**

**SPECspeed2017\_int\_peak = Not Run**

**CPU2017 License:** 3175

**Test Date:** Feb-2019

**Test Sponsor:** Huawei

**Hardware Availability:** Apr-2019

**Tested by:** Huawei

**Software Availability:** Dec-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	28	254	7.00	254	6.98	<b>254</b>	<b>6.99</b>							
602.gcc_s	28	373	10.7	370	10.8	<b>371</b>	<b>10.7</b>							
605.mcf_s	28	341	13.9	<b>342</b>	<b>13.8</b>	343	13.8							
620.omnetpp_s	28	176	9.25	<b>173</b>	<b>9.45</b>	167	9.79							
623.xalancbmk_s	28	111	12.7	<b>111</b>	<b>12.7</b>	111	12.8							
625.x264_s	28	<b>118</b>	<b>14.9</b>	119	14.9	118	14.9							
631.deepsjeng_s	28	<b>243</b>	<b>5.90</b>	242	5.92	243	5.89							
641.leela_s	28	<b>348</b>	<b>4.90</b>	348	4.90	348	4.90							
648.exchange2_s	28	<b>203</b>	<b>14.5</b>	204	14.4	203	14.5							
657.xz_s	28	257	24.0	257	24.1	<b>257</b>	<b>24.0</b>							

**SPECspeed2017\_int\_base = 10.6**

**SPECspeed2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 10.6

Huawei 1288H V5 (Intel Xeon Platinum 8280)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Feb-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disable

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-xz5s Sun Nov 25 13:31:31 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  1 "physical id"s (chips)
  28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                28
On-line CPU(s) list:  0-27
Thread(s) per core:   1
Core(s) per socket:   28
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               6
CPU MHz:                2700.000
CPU max MHz:            4000.0000
CPU min MHz:            1000.0000
BogoMIPS:                5400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                39424K
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 10.6

Huawei 1288H V5 (Intel Xeon Platinum 8280)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Feb-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Platform Notes (Continued)

```
NUMA node0 CPU(s): 0-27
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movebe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 191648 MB
node 0 free: 190658 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 196248412 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 10.6

Huawei 1288H V5 (Intel Xeon Platinum 8280)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Feb-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Platform Notes (Continued)

uname -a:

```
Linux linux-xz5s 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 25 13:27

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	212G	76G	137G	36%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 6.36 02/15/2019

Memory:

12x NO DIMM NO DIMM
12x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base)
657.xz_s(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)
-----
```

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 648.exchange2_s(base)
-----
```

```
=====
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
-----
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 10.6

Huawei 1288H V5 (Intel Xeon Platinum 8280)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Feb-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 10.6

Huawei 1288H V5 (Intel Xeon Platinum 8280)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Feb-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-11-25 13:31:30-0500.

Report generated on 2019-04-02 16:57:13 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.