SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-7049P-TRT
(X11DPi-NT, Intel Xeon Gold 6248)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2019
Hardware Availability: Jul-2017
Software Availability: Nov-2018

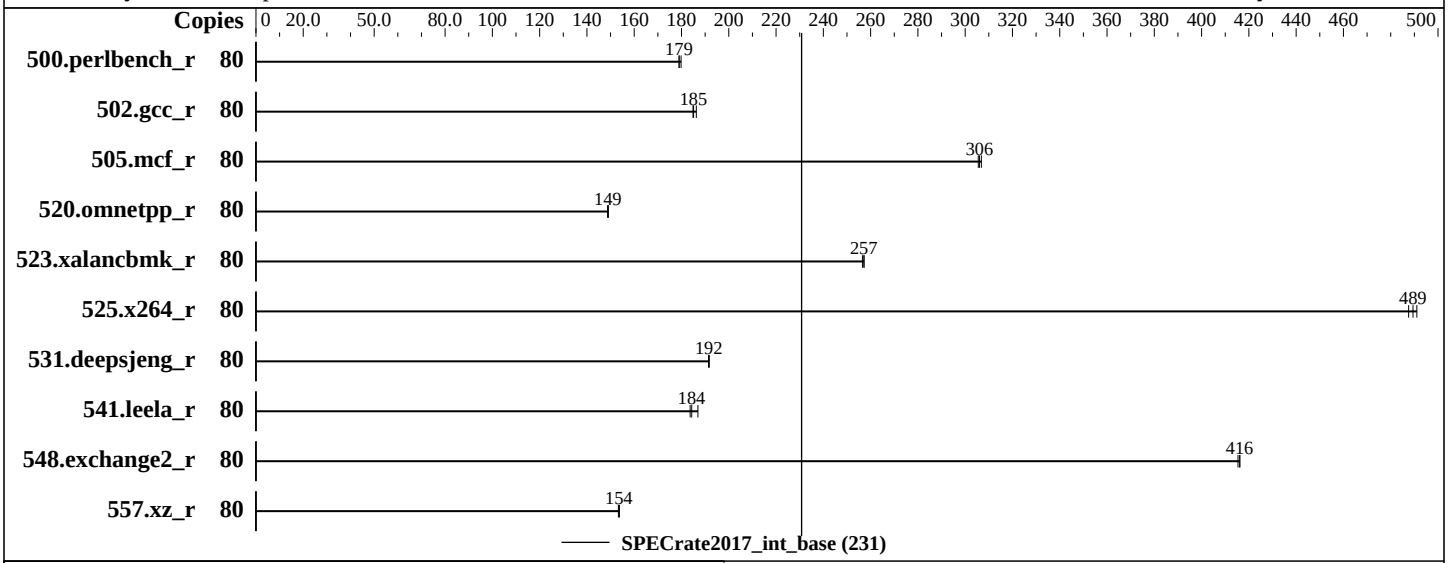

Hardware

CPU Name:	Intel Xeon Gold 6248
Max MHz.:	3900
Nominal:	2500
Enabled:	40 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	480 GB SATA 3 SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 4.12.14-95.6-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	No
Firmware:	version 3.0a released Jan-2019
File System:	xfs
System State:	Run level 3 (Multi-user mode with networking)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-7049P-TRT
(X11DPi-NT, Intel Xeon Gold 6248)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2019
Hardware Availability: Jul-2017
Software Availability: Nov-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	708	180	**712**	**179**	712	179							
502.gcc_r	80	613	185	**612**	**185**	608	186							
505.mcf_r	80	**422**	**306**	423	306	421	307							
520.omnetpp_r	80	**705**	**149**	706	149	704	149							
523.xalancbmk_r	80	**329**	**257**	329	257	328	257							
525.x264_r	80	285	491	287	488	**286**	**489**							
531.deepsjeng_r	80	478	192	479	191	**478**	**192**							
541.leela_r	80	721	184	**719**	**184**	709	187							
548.exchange2_r	80	504	416	505	415	**504**	**416**							
557.xz_r	80	564	153	**563**	**154**	562	154							

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.

Submitted_by: Kelvin Li <kelvinli@supermicro.com>
Submitted: Mon Mar 18 21:44:38 EDT 2019
Submission: cpu2017-20190318-11226.sub
```

Platform Notes

```
BIOS Settings:
Monitor/Mwait = Disabled
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
Hardware Pstate = Out of band mode
SNC = Enabled
Stale Atos = Disabled
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disabled
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux Fri Mar 15 11:33:02 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
       2  "physical id"s (chips)
       80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                80
      On-line CPU(s) list:   0-79
      Thread(s) per core:    2
```

(Continued on next page)

Platform Notes (Continued)

```
      Core(s) per socket:    20
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
      Stepping:              6
      CPU MHz:               2500.000
      BogoMIPS:              5000.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              28160K
      NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
      NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
      NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
      NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
      mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
      pts hwp_epp pku ospke avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 28160 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
    node 0 size: 95349 MB
    node 0 free: 95129 MB
    node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
    node 1 size: 96764 MB
    node 1 free: 96513 MB
    node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
    node 2 size: 96764 MB
    node 2 free: 96569 MB
    node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 size: 96733 MB
  node 3 free: 96295 MB
  node distances:
  node   0   1   2   3
    0:  10  11  21  21
    1:  11  10  21  21
    2:  21  21  10  11
    3:  21  21  11  10

From /proc/meminfo
   MemTotal:       394866056 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 4
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP4"
      VERSION_ID="12.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
   Linux linux 4.12.14-95.6-default #1 SMP Thu Jan 17 06:04:39 UTC 2019 (6af4ef8) x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

run-level 3 Mar 15 11:30 last=5

SPEC is set to: /home/cpu2017
```

(Continued on next page)

Platform Notes (Continued)

```
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   405G   11G  395G   3% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 3.0a 01/11/2019
   Memory:
    12x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
    4x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revB.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revB.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-03-15 14:33:01-0400.
Report generated on 2019-04-04 13:12:41 by CPU2017 PS formatter v6067.
Originally published on 2019-04-04.