



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

**SPECspeed®2017\_fp\_base = 156**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3


**Test Date:** Mar-2019

**Test Sponsor:** HPE

**Hardware Availability:** Apr-2019

**Tested by:** HPE

**Software Availability:** Feb-2019

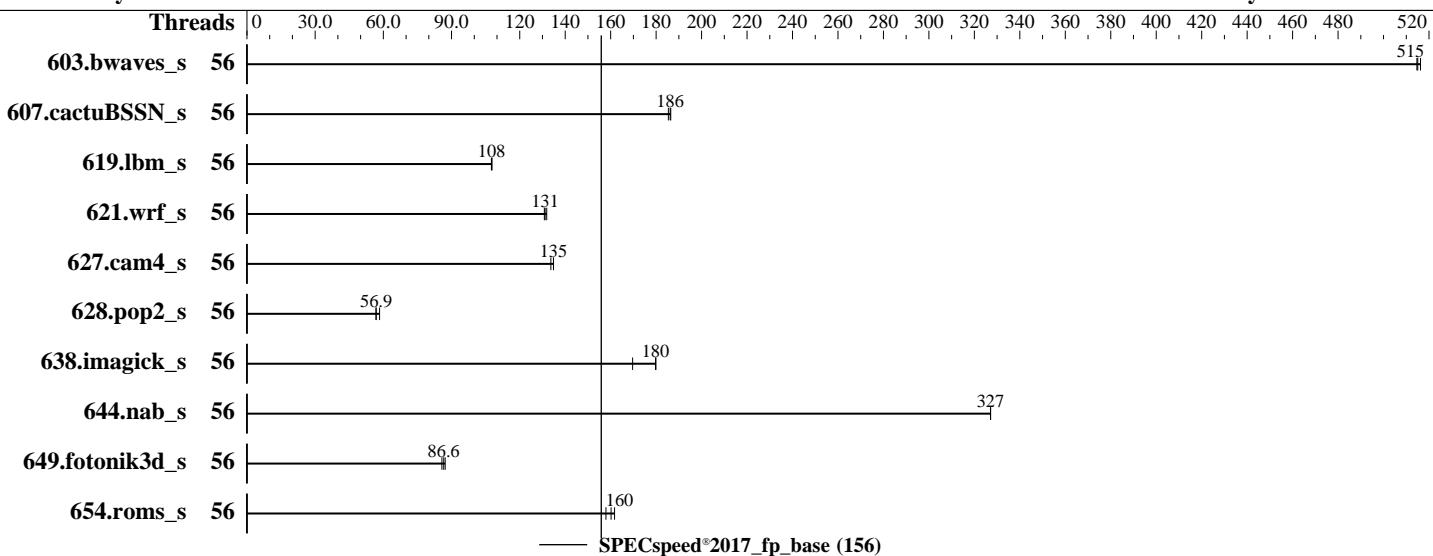

## Hardware

CPU Name: Intel Xeon Platinum 8280  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 56 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Compiler: Kernel 4.12.14-23-default  
 C/C++: Version 19.0.0.117 of Intel C/C++  
 Compiler Build 20190131 for Linux;  
 Fortran: Version 19.0.0.117 of Intel Fortran  
 Compiler Build 20190131 for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version U30 02/02/2019 released Apr-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	56	<u>115</u>	<u>515</u>	115	515	114	516							
607.cactuBSSN_s	56	89.4	186	89.9	185	<u>89.5</u>	<u>186</u>							
619.lbm_s	56	48.6	108	48.7	108	<u>48.7</u>	<u>108</u>							
621.wrf_s	56	100	132	101	131	<u>101</u>	<u>131</u>							
627.cam4_s	56	<u>65.7</u>	<u>135</u>	65.7	135	66.3	134							
628.pop2_s	56	209	56.7	<u>209</u>	<u>56.9</u>	204	58.3							
638.imagick_s	56	<u>80.3</u>	<u>180</u>	80.2	180	85.0	170							
644.nab_s	56	53.4	327	53.4	327	<u>53.4</u>	<u>327</u>							
649.fotonik3d_s	56	<u>105</u>	<u>86.6</u>	106	85.8	105	87.2							
654.roms_s	56	97.4	162	<u>98.3</u>	<u>160</u>	99.7	158							
SPECspeed®2017_fp_base = 156														
SPECspeed®2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=core,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017\_ic19/lib/ia32:/home/cpu2017\_ic19/lib/intel64:  
/home/cpu2017\_ic19/je5.0.1-32:/home/cpu2017\_ic19/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Balanced Power

Workload Profile set to Custom

Numa Group Size Optimization set to Flat

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017\_ic19/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-9mbf Wed Feb 27 16:11:26 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  2 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Thread(s) per core:   1
Core(s) per socket:   28
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               6
CPU MHz:               2700.000
BogoMIPS:              5400.00
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K  
NUMA node0 CPU(s): 0-27  
NUMA node1 CPU(s): 28-55

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperfmpf perf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin mba tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavedec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512\_vnni arch\_capabilities ssbd

/proc/cpuinfo cache data  
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27  
node 0 size: 193016 MB  
node 0 free: 192341 MB  
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55  
node 1 size: 193332 MB  
node 1 free: 193153 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 395621016 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="SLES"  
VERSION="15"  
VERSION\_ID="15"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 15"
```

```
ID="sles"
```

```
ID_LIKE="suse"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
```

```
Linux linux-9mbf 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Feb 27 16:09
```

```
SPEC is set to: /home/cpu2017_ic19
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xfs	436G	169G	268G	39%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE U30 02/02/2019
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2933
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

---

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

---

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.html>  
<http://www.spec.org/cpu2017/flags/HPE-ic19.0ul-flags-linux64.2019-04-03.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed®2017\_fp\_base = 156

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.xml>

<http://www.spec.org/cpu2017/flags/HPE-ic19.Oul-flags-linux64.2019-04-03.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-02-27 16:11:25-0500.

Report generated on 2021-01-05 17:44:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-04-03.