SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 217

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

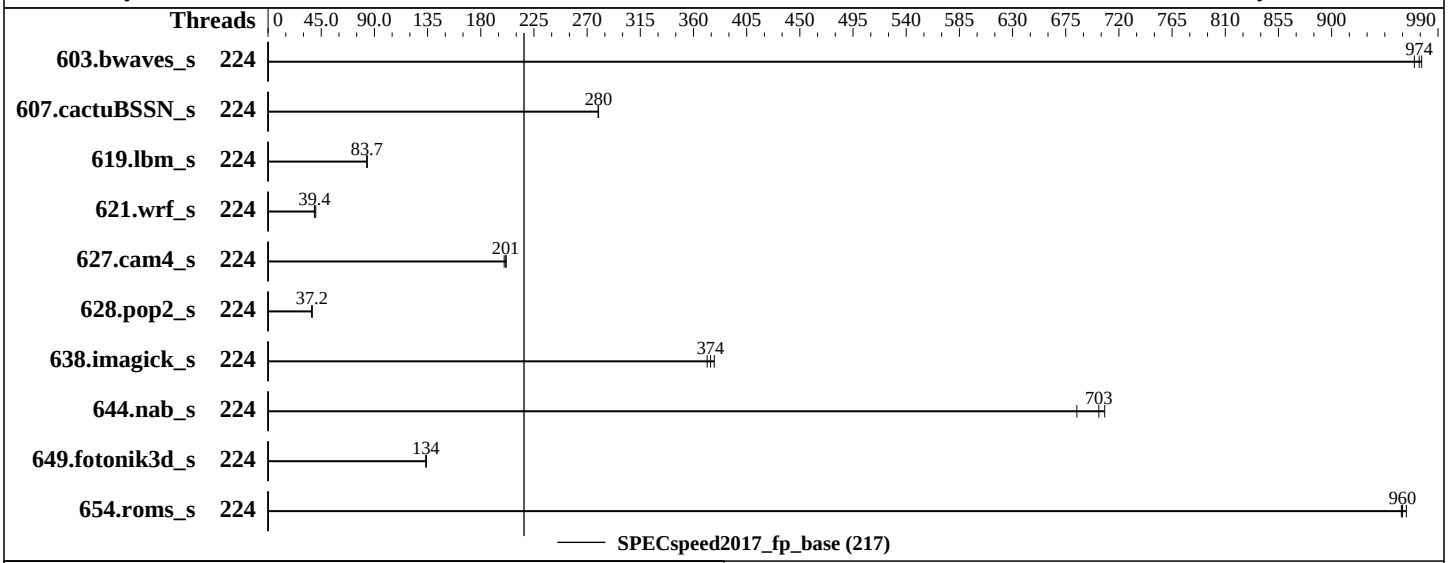

Hardware

CPU Name:	Intel Xeon Platinum 8280
Max MHz.:	4000
Nominal:	2700
Enabled:	224 cores, 8 chips
Orderable:	2,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	2 x 900 GB SAS HDD 10K RPM, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	Yes
Firmware:	Version 9.25 released Feb-2019
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 217

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	224	60.4	976	**60.6**	**974**	60.8	970							
607.cactuBSSN_s	224	59.6	280	**59.6**	**280**	59.7	279							
619.lbm_s	224	62.5	83.8	62.6	83.7	**62.6**	**83.7**							
621.wrf_s	224	328	40.4	**335**	**39.4**	337	39.2							
627.cam4_s	224	44.4	200	44.0	202	**44.1**	**201**							
628.pop2_s	224	**319**	**37.2**	319	37.2	320	37.0							
638.imagick_s	224	38.8	372	**38.5**	**374**	38.2	378							
644.nab_s	224	**24.9**	**703**	25.5	684	24.7	708							
649.fotonik3d_s	224	**68.2**	**134**	68.3	134	68.0	134							
654.roms_s	224	16.3	963	**16.4**	**960**	16.4	959							

SPECspeed2017_fp_base = 217

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 Sub NUMA Cluster (SNC) set to Disable
 IMC (Integrated memory controller) Interleaving set to Auto
 Xtended Prediction Table (XPT) Prefetch set to Enable
 Memory Patrol Scrub set to Disable
 Last Level Cache (LLC) Prefetch set to Disable
 Hyper-Threading Set to Disable
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-2yo1 Thu Mar  7 10:34:46 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
       8  "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 28
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                224
      On-line CPU(s) list:   0-223
      Thread(s) per core:    1
      Core(s) per socket:    28
      Socket(s):             8
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
      Stepping:              6
      CPU MHz:               2700.000
      CPU max MHz:           4000.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-27
      NUMA node1 CPU(s):     28-55
      NUMA node2 CPU(s):     56-83
      NUMA node3 CPU(s):     84-111
      NUMA node4 CPU(s):     112-139
      NUMA node5 CPU(s):     140-167
      NUMA node6 CPU(s):     168-195
      NUMA node7 CPU(s):     196-223
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
```


(Continued on next page)

Platform Notes (Continued)

```
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
   node 0 size: 191864 MB
   node 0 free: 188754 MB
   node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
   53 54 55
   node 1 size: 193522 MB
   node 1 free: 190796 MB
   node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
   81 82 83
   node 2 size: 193522 MB
   node 2 free: 190740 MB
   node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
   106 107 108 109 110 111
   node 3 size: 193493 MB
   node 3 free: 190772 MB
   node 4 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129
   130 131 132 133 134 135 136 137 138 139
   node 4 size: 193522 MB
   node 4 free: 189139 MB
   node 5 cpus: 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157
   158 159 160 161 162 163 164 165 166 167
   node 5 size: 193522 MB
   node 5 free: 190800 MB
   node 6 cpus: 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185
   186 187 188 189 190 191 192 193 194 195
   node 6 size: 193522 MB
   node 6 free: 190793 MB
   node 7 cpus: 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213
   214 215 216 217 218 219 220 221 222 223
   node 7 size: 193298 MB
   node 7 free: 190574 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  31  21  21  21  31  31  31
     1:  31  10  21  21  31  21  31  31
     2:  21  21  10  31  31  31  21  31
     3:  21  21  31  10  31  31  31  21
     4:  21  31  31  31  10  21  31  21
     5:  31  21  31  31  21  10  21  31
     6:  31  31  21  31  31  21  10  21
     7:  31  31  31  21  21  31  21  10

 From /proc/meminfo
    MemTotal:       1583381868 kB
    HugePages_Total:   10240
    Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP4

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 4
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP4"
       VERSION_ID="12.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp4"

 uname -a:
    Linux linux-2yo1 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
    x86_64 x86_64 x86_64 GNU/Linux

 run-level 5 Mar 7 10:04

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   1.6T   51G  1.5T   4% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 9.25 02/15/2019
   Memory:
    48x NO DIMM NO DIMM
    48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

Base Other Flags

C benchmarks:
`-m64 -std=c11`

Fortran benchmarks:
`-m64`

Benchmarks using both Fortran and C:
`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-03-06 21:34:46-0500.
Report generated on 2019-04-02 17:01:45 by CPU2017 PS formatter v6067.
Originally published on 2019-04-02.