SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperBlade SBI-4129P-C2N(B11DPT-P, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.8

SPECspeed2017_int_peak = 11.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2019
Hardware Availability: Mar-2019
Software Availability: Feb-2019

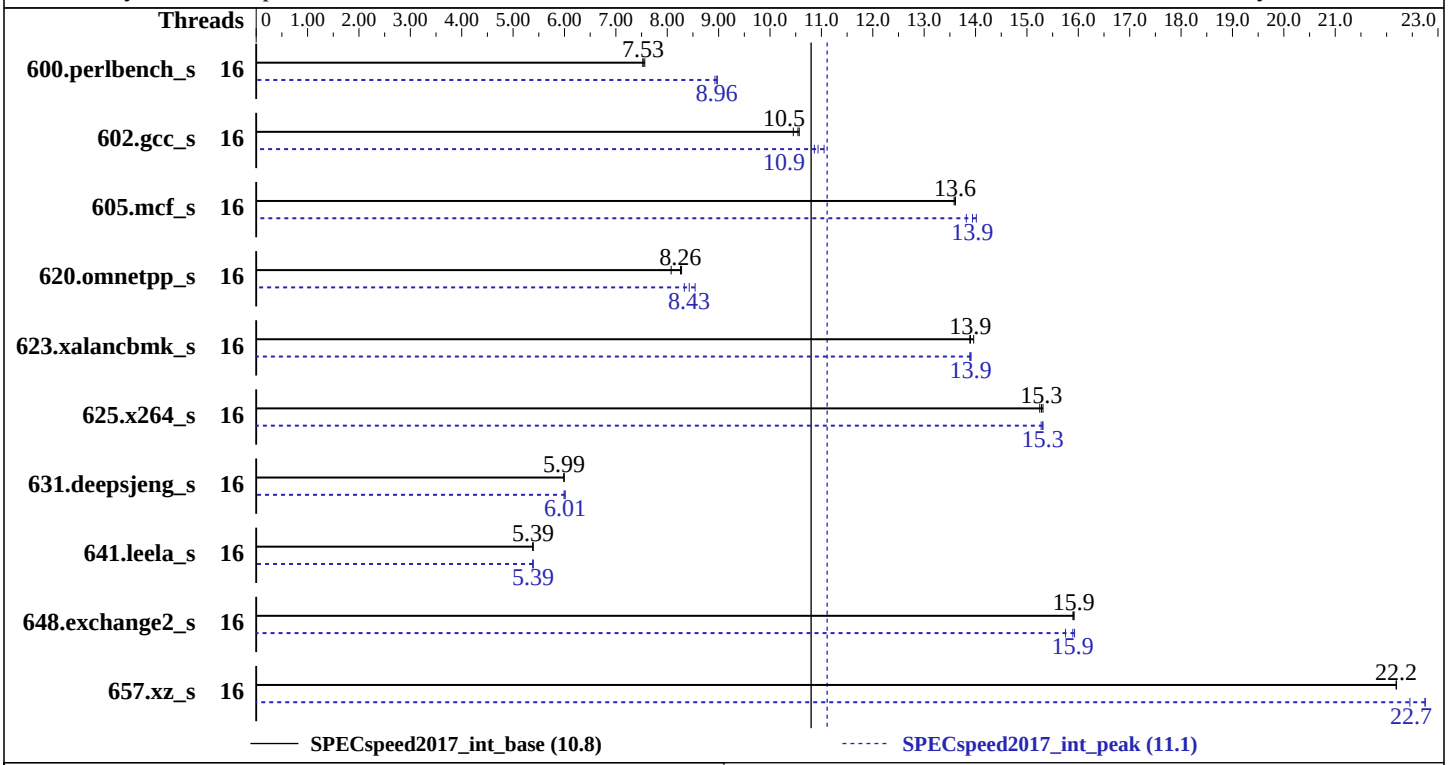

Hardware

CPU Name:	Intel Xeon Gold 6244
Max MHz.:	4400
Nominal:	3600
Enabled:	16 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2933)
Storage:	1 x 300GB SATA II HDD, 10K RPM
Other:	None

Software

OS:	Red Hat Enterprise Linux Server Release 7.6 (x86_64) 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	Yes
Firmware:	Version 3.0a Released Feb-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1

SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperBlade SBI-4129P-C2N(B11DPT-P, Intel Xeon Gold 6244)

SPECspeed2017_int_base = 10.8

SPECspeed2017_int_peak = 11.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2019
Hardware Availability: Mar-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	**236**	**7.53**	236	7.53	235	7.56	16	198	8.97	199	8.93	**198**	**8.96**
602.gcc_s	16	381	10.5	377	10.6	**378**	**10.5**	16	**364**	**10.9**	367	10.9	360	11.1
605.mcf_s	16	348	13.6	347	13.6	**347**	**13.6**	16	**339**	**13.9**	337	14.0	342	13.8
620.omnetpp_s	16	**198**	**8.26**	197	8.28	202	8.08	16	**194**	**8.43**	191	8.54	196	8.33
623.xalancbmk_s	16	101	14.0	102	13.9	**102**	**13.9**	16	102	13.9	**102**	**13.9**	102	13.9
625.x264_s	16	115	15.3	116	15.2	**115**	**15.3**	16	115	15.3	115	15.3	**115**	**15.3**
631.deepsjeng_s	16	239	5.99	239	5.99	**239**	**5.99**	16	239	5.99	**238**	**6.01**	238	6.01
641.leela_s	16	**317**	**5.39**	317	5.38	317	5.39	16	317	5.39	**317**	**5.39**	317	5.39
648.exchange2_s	16	**185**	**15.9**	185	15.9	185	15.9	16	185	15.9	187	15.8	**185**	**15.9**
657.xz_s	16	**279**	**22.2**	279	22.2	279	22.2	16	**272**	**22.7**	272	22.8	275	22.5

SPECspeed2017_int_base = **10.8**

SPECspeed2017_int_peak = **11.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/specnew/lib/ia32:/home/specnew/lib/intel64:/home/specnew/je5.0.1-32:/home/specnew/je5.0.1-64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
 BIOS Settings:
 Hyper-Threading = Disable
 Power Technology = Custom
 Power Performance Tuning = BIOS Controls EPB
 ENERGY_PERF_BIAS_CFG mode = Performance
 Hardware P-state = Out of Band Mode
LLC dead line alloc = Disable
 SDDC Plus One = Disable
 ADDDC Sparing = Disable
 Patrol Scrub = Disable
 Sysinfo program /home/specnew/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on 161-46.pnet Mon Mar 18 18:47:32 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
       2  "physical id"s (chips)
       16 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 8
       physical 0: cores 9 17 18 19 24 25 27
       physical 1: cores 1 2 3 4 9 11 25 27

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                16
      On-line CPU(s) list:   0-15
      Thread(s) per core:    1
      Core(s) per socket:    8
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
      Stepping:              6
      CPU MHz:               3600.000
      BogoMIPS:              7200.00
      Virtualization:        VT-x
```

(Continued on next page)

Platform Notes (Continued)

```
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              25344K
      NUMA node0 CPU(s):     0-7
      NUMA node1 CPU(s):     8-15
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
      ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp_epp
      pku ospke avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7
    node 0 size: 96933 MB
    node 0 free: 93689 MB
    node 1 cpus: 8 9 10 11 12 13 14 15
    node 1 size: 98304 MB
    node 1 free: 95691 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       196505252 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.6 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
```


(Continued on next page)

Platform Notes (Continued)

```
       VARIANT_ID="server"
       VERSION_ID="7.6"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

 uname -a:
    Linux 161-46.pnet 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018 x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Mar 18 18:46 last=5

 SPEC is set to: /home/specnew
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   225G  5.8G  219G   3% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 3.0a 02/04/2019
   Memory:
    12x Micron 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933, configured at 2934
    4x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
      peak) 657.xz_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base,
      peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 620.omnetpp_s(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  648.exchange2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-O2 -xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -fno-strict-overflow -L/usr/local/je5.0.1-64/lib -ljemalloc`

602.gcc_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-O2 -xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div -DSPEC_SUPPRESS_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

605.mcf_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

625.x264_s: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

657.xz_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-O2 -xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3 -no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:

620.omnetpp_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc`

623.xalancbmk_s: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc`

631.deepsjeng_s: `Same as 623.xalancbmk_s`

641.leela_s: `Same as 623.xalancbmk_s`

Fortran benchmarks:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-03-18 18:47:32-0400.
Report generated on 2019-05-15 13:19:13 by CPU2017 PS formatter v6067.
Originally published on 2019-05-14.