SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017_fp_base = 309

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

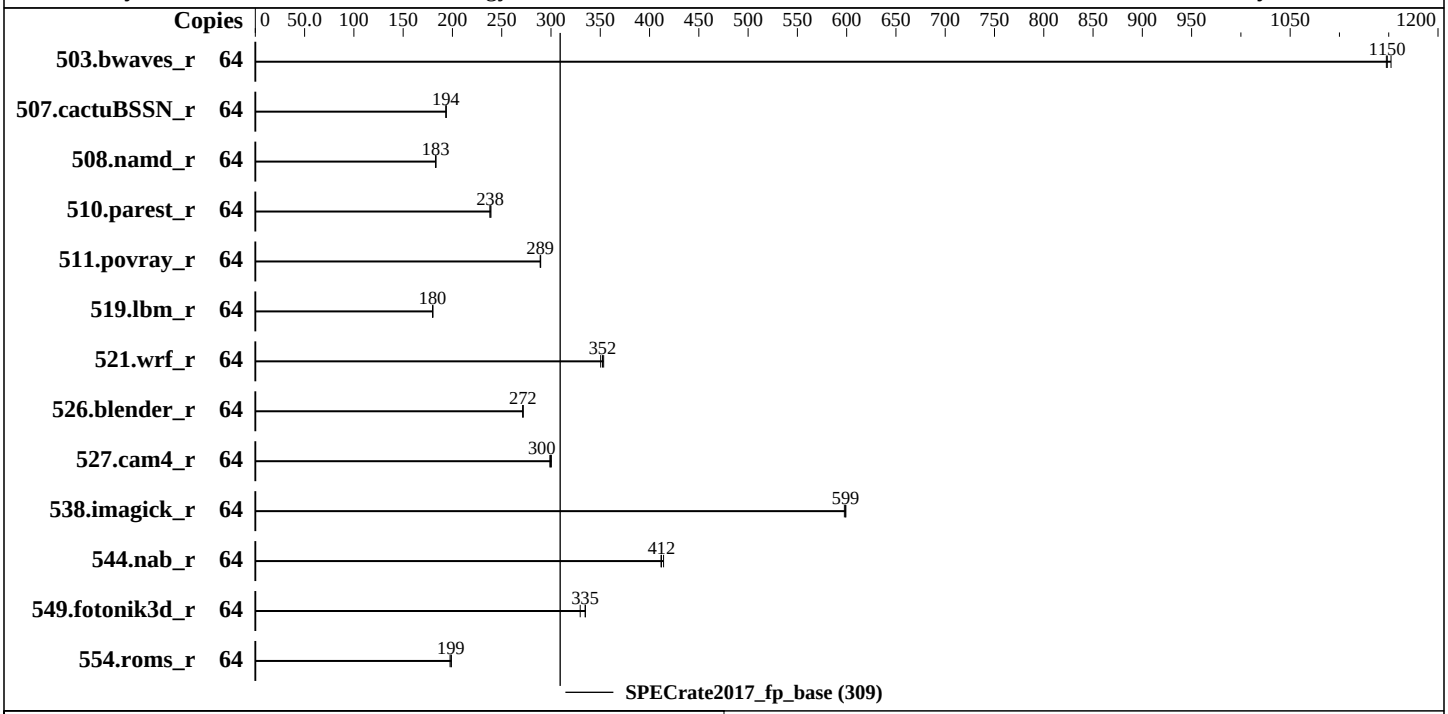

Hardware

CPU Name:	Intel Xeon Platinum 8256
Max MHz.:	3900
Nominal:	3800
Enabled:	32 cores, 8 chips, 2 threads/core
Orderable:	2,3,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	16.5 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	960 GB tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version PSE121C 1.50 released Jan-2019
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECrate2017_fp_base = 309

SPECrate2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	**559**	**1150**	559	1150	557	1150							
507.cactuBSSN_r	64	419	193	418	194	**419**	**194**							
508.namd_r	64	**332**	**183**	332	183	333	183							
510.parest_r	64	700	239	703	238	**703**	**238**							
511.povray_r	64	516	290	517	289	**517**	**289**							
519.lbm_r	64	375	180	374	180	**375**	**180**							
521.wrf_r	64	406	353	409	350	**407**	**352**							
526.blender_r	64	359	271	359	272	**359**	**272**							
527.cam4_r	64	373	300	**374**	**300**	375	299							
538.imagick_r	64	**266**	**599**	266	598	266	599							
544.nab_r	64	260	414	**261**	**412**	262	412							
549.fotonik3d_r	64	757	330	745	335	**745**	**335**							
554.roms_r	64	511	199	**512**	**199**	515	198							

SPECrate2017_fp_base = 309

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=960g tmpfs /home
Process tuning setting:
 echo 50000     > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
 echo 240000000 > /proc/sys/kernel/sched_latency_ns
 echo 5000000   > /proc/sys/kernel/sched_migration_cost_ns
 echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
 echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19/lib/intel64"
 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Choose Operating Mode set to Custom Mode
MONITORMWAIT set to Enable
SNC set to Enable
Patrol Scrub set to Disable
Stale AtoS set to Enable
LLC dead line alloc set to Disable
 Sysinfo program /home/cpu2017-1.0.5-ic19/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on sles12sp4 Sat Apr 13 14:20:09 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
       8  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 4
       siblings  : 8
       physical 0: cores 1 5 9 13
       physical 1: cores 1 2 5 13
       physical 2: cores 2 5 9 13
       physical 3: cores 4 8 9 13
```

(Continued on next page)

Platform Notes (Continued)

```
       physical 4: cores 1 2 4 13
       physical 5: cores 5 8 9 13
       physical 6: cores 2 5 9 13
       physical 7: cores 5 8 9 12

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                64
      On-line CPU(s) list:   0-63
      Thread(s) per core:    2
      Core(s) per socket:    4
      Socket(s):             8
      NUMA node(s):          16
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
      Stepping:              6
      CPU MHz:               3800.000
      CPU max MHz:           3900.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              7600.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              16896K
      NUMA node0 CPU(s):     0,2,32,34
      NUMA node1 CPU(s):     1,3,33,35
      NUMA node2 CPU(s):     4,5,36,37
      NUMA node3 CPU(s):     6,7,38,39
      NUMA node4 CPU(s):     8,10,40,42
      NUMA node5 CPU(s):     9,11,41,43
      NUMA node6 CPU(s):     12,15,44,47
      NUMA node7 CPU(s):     13,14,45,46
      NUMA node8 CPU(s):     16,17,48,49
      NUMA node9 CPU(s):     18,19,50,51
      NUMA node10 CPU(s):    20,23,52,55
      NUMA node11 CPU(s):    21,22,53,54
      NUMA node12 CPU(s):    24,26,56,58
      NUMA node13 CPU(s):    25,27,57,59
      NUMA node14 CPU(s):    28,31,60,63
      NUMA node15 CPU(s):    29,30,61,62
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)

Platform Notes (Continued)

```
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 16896 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 2 32 34
   node 0 size: 193121 MB
   node 0 free: 192851 MB
   node 1 cpus: 1 3 33 35
   node 1 size: 193530 MB
   node 1 free: 193208 MB
   node 2 cpus: 4 5 36 37
   node 2 size: 193530 MB
   node 2 free: 193359 MB
   node 3 cpus: 6 7 38 39
   node 3 size: 193530 MB
   node 3 free: 193378 MB
   node 4 cpus: 8 10 40 42
   node 4 size: 193530 MB
   node 4 free: 180795 MB
   node 5 cpus: 9 11 41 43
   node 5 size: 193501 MB
   node 5 free: 189485 MB
   node 6 cpus: 12 15 44 47
   node 6 size: 193530 MB
   node 6 free: 193378 MB
   node 7 cpus: 13 14 45 46
   node 7 size: 193530 MB
   node 7 free: 193365 MB
   node 8 cpus: 16 17 48 49
   node 8 size: 193530 MB
   node 8 free: 193359 MB
   node 9 cpus: 18 19 50 51
   node 9 size: 193530 MB
   node 9 free: 193339 MB
   node 10 cpus: 20 23 52 55
```

(Continued on next page)

Platform Notes (Continued)

```
   node 10 size: 193530 MB
   node 10 free: 193358 MB
   node 11 cpus: 21 22 53 54
   node 11 size: 193530 MB
   node 11 free: 193360 MB
   node 12 cpus: 24 26 56 58
   node 12 size: 193530 MB
   node 12 free: 193375 MB
   node 13 cpus: 25 27 57 59
   node 13 size: 193530 MB
   node 13 free: 193384 MB
   node 14 cpus: 28 31 60 63
   node 14 size: 193527 MB
   node 14 free: 193353 MB
   node 15 cpus: 29 30 61 62
   node 15 size: 193530 MB
   node 15 free: 193332 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  11  21  21  31  31  21  21  21  21  31  31  31  31  31  31
     1:  11  10  21  21  31  31  21  21  21  21  31  31  31  31  31  31
     2:  21  21  10  11  21  21  31  31  31  31  21  21  31  31  31  31
     3:  21  21  11  10  21  21  31  31  31  31  21  21  31  31  31  31
     4:  31  31  21  21  10  11  21  21  31  31  31  31  21  21  31  31
     5:  31  31  21  21  11  10  21  21  31  31  31  31  21  21  31  31
     6:  21  21  31  31  21  21  10  11  31  31  31  31  31  31  21  21
     7:  21  21  31  31  21  21  11  10  31  31  31  31  31  31  21  21
     8:  21  21  31  31  31  31  31  31  10  11  21  21  21  21  31  31
     9:  21  21  31  31  31  31  31  31  11  10  21  21  21  21  31  31
    10:  31  31  21  21  31  31  31  31  21  21  10  11  31  31  21  21
    11:  31  31  21  21  31  31  31  31  21  21  11  10  31  31  21  21
    12:  31  31  31  31  21  21  31  31  21  21  31  31  10  11  21  21
    13:  31  31  31  31  21  21  31  31  21  21  31  31  11  10  21  21
    14:  31  31  31  31  31  31  21  21  31  31  21  21  21  21  10  11
    15:  31  31  31  31  31  31  21  21  31  31  21  21  21  21  11  10

  From /proc/meminfo
     MemTotal:       3170354252 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 4
        # This file is deprecated and will be removed in a future service pack or release.
```


(Continued on next page)

Platform Notes (Continued)

```
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP4"
       VERSION_ID="12.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp4"

 uname -a:
    Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
 IBPB, IBRS_FW

 run-level 3 Apr 13 04:13

 SPEC is set to: /home/cpu2017-1.0.5-ic19
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  960G   11G  950G   2% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[PSE121C-1.50]- 01/16/2019
   Memory:
    96x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-13 02:20:08-0400.
Report generated on 2019-04-30 17:41:29 by CPU2017 PS formatter v6067.
Originally published on 2019-04-30.