SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 149

SPECspeed2017_fp_peak = 150

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

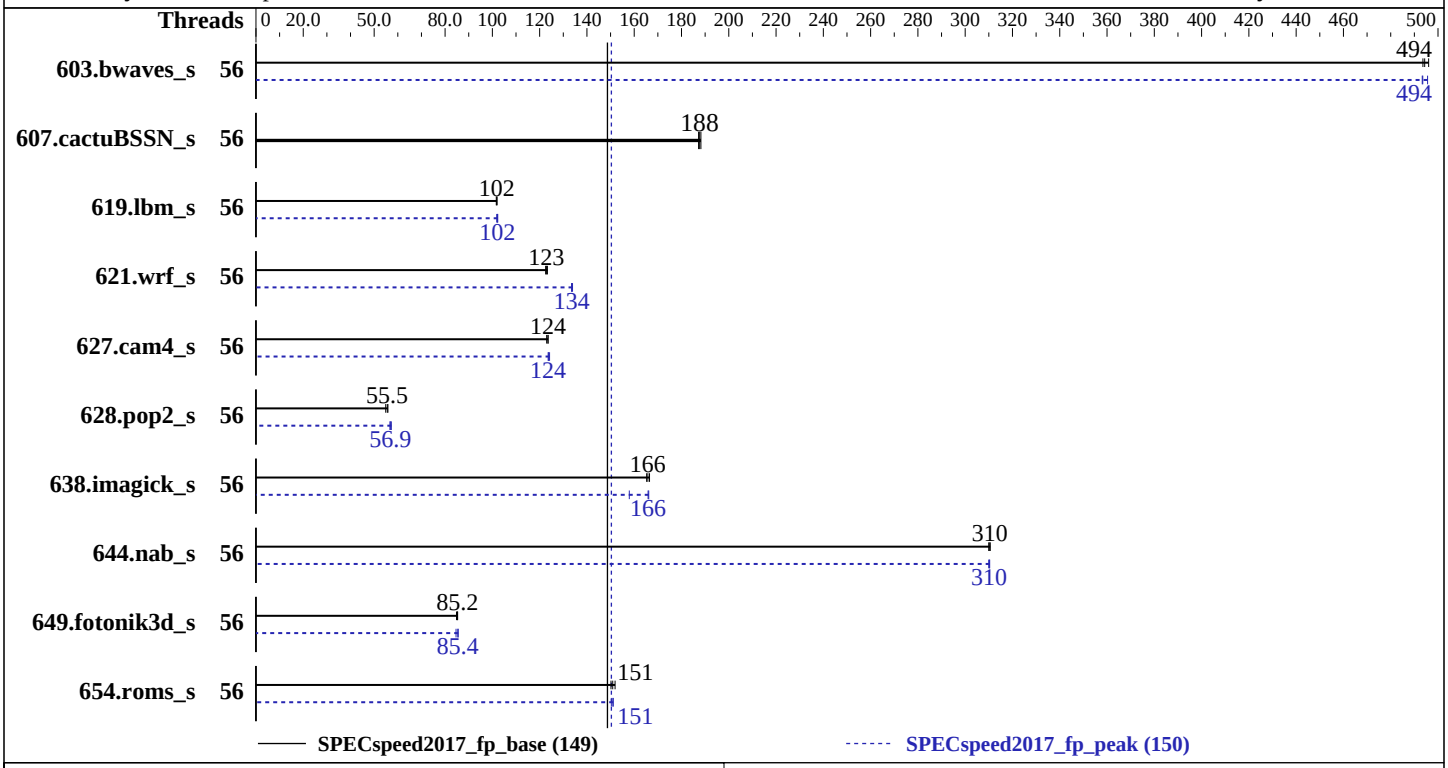

Hardware

CPU Name:	Intel Xeon Platinum 8280
Max MHz.:	4000
Nominal:	2700
Enabled:	56 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 2 TB SATA III HDD, 7200 RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Version 3.0c released Mar-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 149

SPECspeed2017_fp_peak = 150

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	119	496	**119**	**494**	120	494	56	120	493	119	496	**120**	**494**
607.cactuBSSN_s	56	**88.8**	**188**	88.6	188	89.0	187	56	**88.8**	**188**	88.6	188	89.0	187
619.lbm_s	56	51.5	102	51.4	102	**51.4**	**102**	56	51.2	102	51.4	102	**51.3**	**102**
621.wrf_s	56	108	123	**108**	**123**	107	123	56	99.1	134	98.8	134	**99.0**	**134**
627.cam4_s	56	71.7	124	**71.7**	**124**	72.1	123	56	71.7	124	71.4	124	**71.7**	**124**
628.pop2_s	56	**214**	**55.5**	216	54.9	213	55.8	56	209	56.7	**209**	**56.9**	207	57.3
638.imagick_s	56	**87.0**	**166**	87.3	165	86.7	166	56	86.8	166	**87.0**	**166**	91.3	158
644.nab_s	56	56.4	310	56.3	311	**56.3**	**310**	56	56.3	310	56.4	310	**56.3**	**310**
649.fotonik3d_s	56	107	85.3	107	84.8	**107**	**85.2**	56	**107**	**85.4**	108	84.6	107	85.6
654.roms_s	56	105	150	104	152	**104**	**151**	56	104	151	**104**	**151**	105	150

SPECspeed2017_fp_base = 149

SPECspeed2017_fp_peak = 150

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches

 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Hyper-Threading = Disable
```

(Continued on next page)

Platform Notes (Continued)

```
LLC prefetch = Disable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
Hardware P-state = Out of Band Mode
XPT Prefetch = Disable
Stale AtoS = Disable
LLC dead line alloc = Enable
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-1g5v Mon Apr 15 22:36:52 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
      2  "physical id"s (chips)
      56 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                56
     On-line CPU(s) list:   0-55
     Thread(s) per core:    1
     Core(s) per socket:    28
     Socket(s):             2
     NUMA node(s):          2
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
     Stepping:              7
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU MHz:               2700.000
      BogoMIPS:              5400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-27
      NUMA node1 CPU(s):     28-55
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
      intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
      pts hwp_epp pku ospke avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    node 0 size: 191986 MB
    node 0 free: 190592 MB
    node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
    53 54 55
    node 1 size: 193321 MB
    node 1 free: 186419 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       394555716 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP4
```


(Continued on next page)

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 4
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP4"
      VERSION_ID="12.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
   Linux linux-1g5v 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Apr 15 17:26

SPEC is set to: /home/cpu2017
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  1.6T   86G  1.5T   6% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS American Megatrends Inc. 3.0c 03/27/2019
  Memory:
   4x NO DIMM NO DIMM
   12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   603.bwaves_s(peak) 649.fotonik3d_s(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
CC   621.wrf_s(peak) 628.pop2_s(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:
```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:
```
icc -m64 -std=c11
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:
```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revC.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-15 10:36:51-0400.
Report generated on 2019-04-30 17:45:12 by CPU2017 PS formatter v6067.
Originally published on 2019-04-30.