



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19


Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

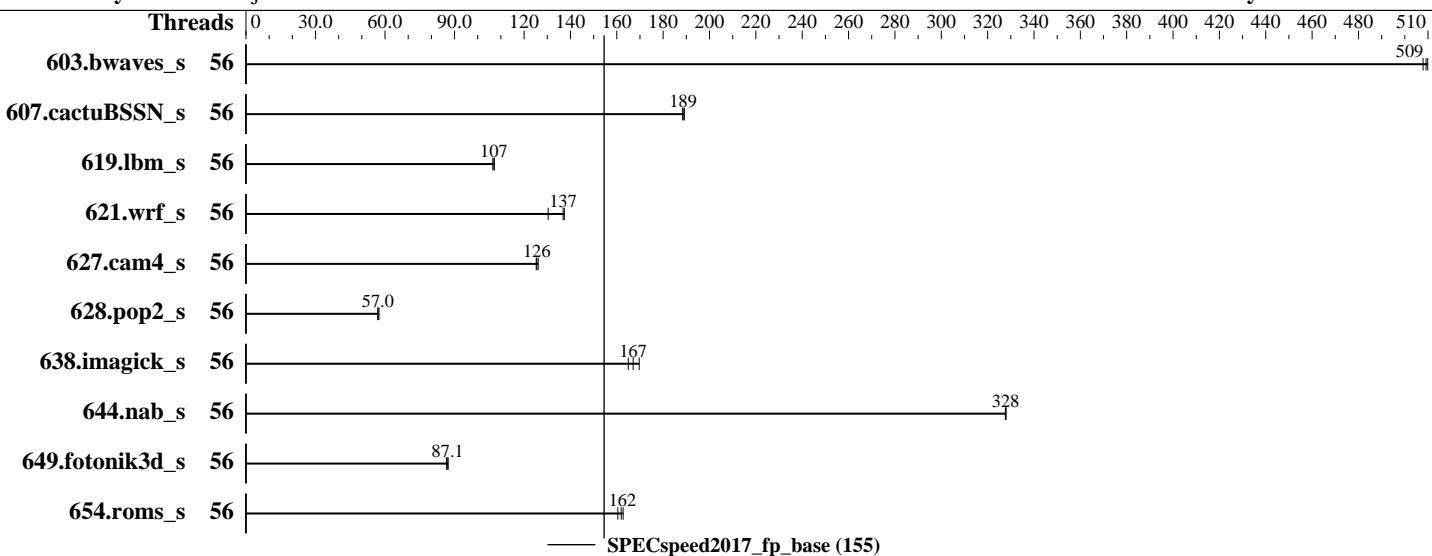

Hardware

CPU Name: Intel Xeon Platinum 8280
 Max MHz.: 4000
 Nominal: 2700
 Enabled: 56 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x SATA SSD 1.1 TB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15
 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++
 Compiler Build 20190117 for Linux;
 Fortran: Version 19.0.2.187 of Intel Fortran
 Compiler Build 20190117 for Linux
 Parallel: Yes
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3384-B1x. Released Jun-2019 tested as V5.0.0.14 R1.6.0 for D3384-B1x Apr-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Threads	Seconds	Ratio	Threads	Seconds	Ratio	Threads	Seconds
603.bwaves_s	56	116	510	116	509	116	508									
607.cactuBSSN_s	56	88.1	189	88.5	188	88.4	189									
619.lbm_s	56	48.9	107	49.2	106	48.9	107									
621.wrf_s	56	101	130	96.6	137	96.3	137									
627.cam4_s	56	70.3	126	70.6	126	70.8	125									
628.pop2_s	56	208	57.0	207	57.4	209	56.9									
638.imagick_s	56	87.4	165	85.0	170	86.4	167									
644.nab_s	56	53.3	328	53.3	328	53.3	328									
649.fotonik3d_s	56	105	86.5	105	87.1	105	87.2									
654.roms_s	56	96.8	163	97.2	162	98.1	160									
SPECspeed2017_fp_base = 155																
SPECspeed2017_fp_peak = Not Run																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/Benchmark/cascadelake_speccpu2017_speed_fp/icc19.2-lib/intel64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Hyper-Threading = Disabled

Adjacent Cache Line Prefetch = Disabled

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

Override OS Energy Performance = Enabled

Energy Performance = Performance

Patrol Scrub = Disabled

Sub NUMA Clustering = Disabled

WR CRC feature Control = Disabled

Fan Control = Full

UPI Link L0p Enable = Disable

UPI Link L1 Enable = Disable

Sysinfo program /home/Benchmark/cascadelake_speccpu2017_speed_fp/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-947a Wed Apr 17 14:04:25 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  2 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Thread(s) per core:   1
Core(s) per socket:   28
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               7
CPU MHz:                2700.000
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 385501 MB
node 0 free: 385026 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 386836 MB
node 1 free: 386254 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

From /proc/meminfo

```
MemTotal:      790874312 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-947a 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

run-level 3 Apr 17 14:02

```
SPEC is set to: /home/Benchmark/cascadelake_speccpu2017_speed_fp
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   1.1T  147G  927G  14%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.6.0 for D3384-B1x
04/09/2019
```

Memory:

```
24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Compiler Version Notes (Continued)

=====

FC 607.cactubSSN_s(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_S: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_S: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevC.2019-04-30.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevC.2019-04-30.xml>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,
2.70GHz

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-17 01:04:24-0400.

Report generated on 2019-05-23 13:00:01 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.