# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 255

SPECrate2017_fp_peak = 259

**CPU2017 License:** 9066
**Test Sponsor:** New H3C Technologies Co., Ltd.
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2019
**Hardware Availability:** Jul-2017
**Software Availability:** Apr-2019

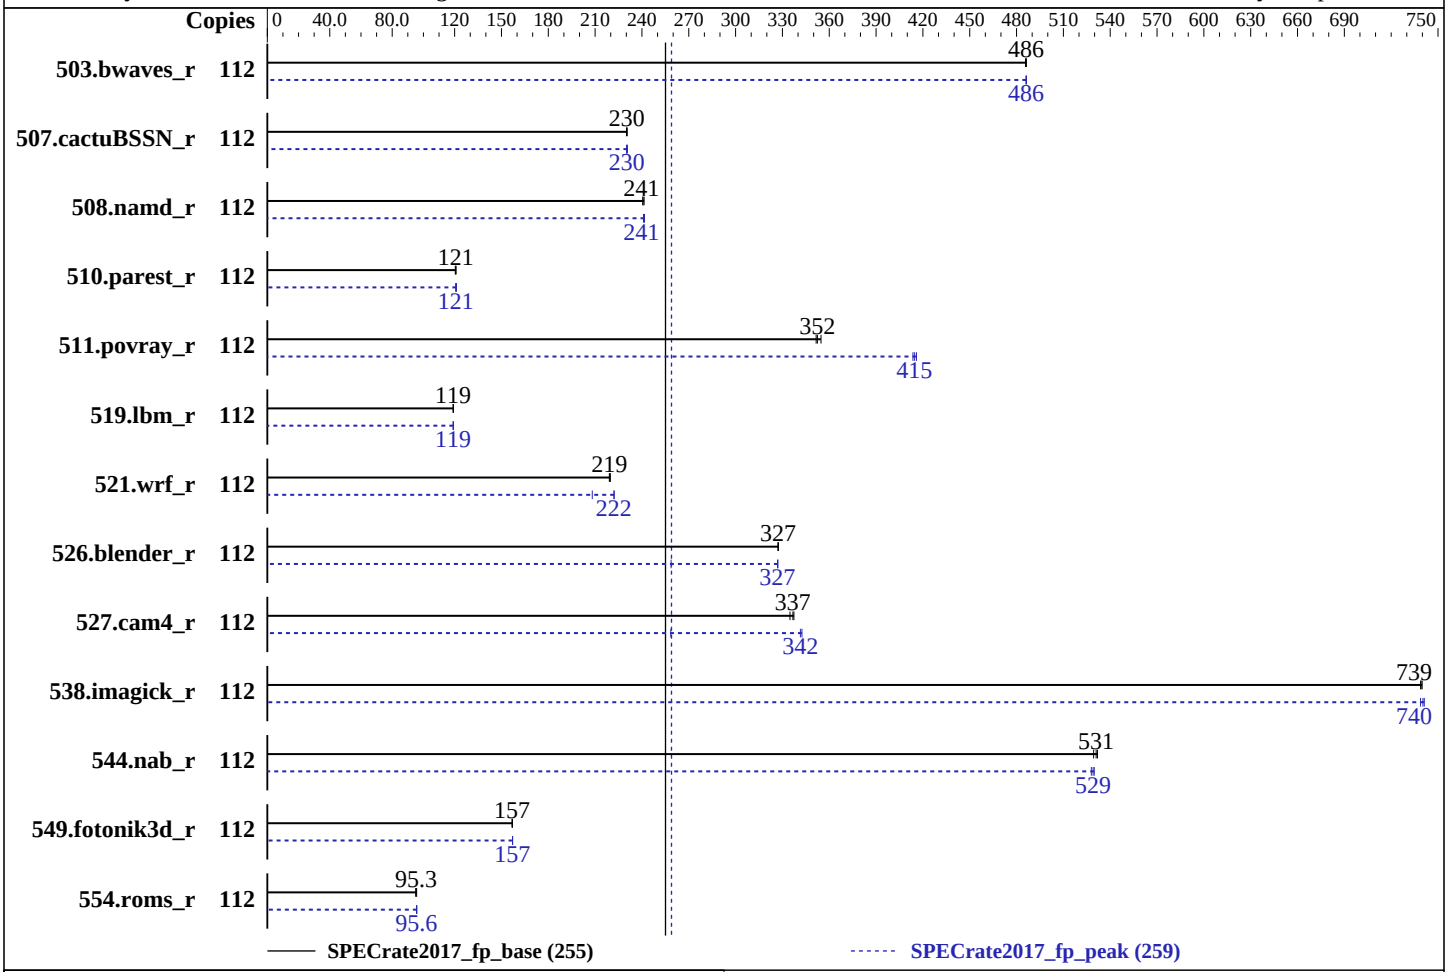


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8180 |
| Max MHz.: | 3800 |
| Nominal: | 2500 |
| Enabled: | 56 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 Chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 38.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R) |
| Storage: | 1 x 960GB SATA SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux Server release 7.6 (Maipo)<br>3.10.0-957.10.1.el7.x86_64 |
| Compiler: | C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;<br>Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux |
| Parallel: | No |
| Firmware: | Version 2.00.25P51 released Apr-2019 BIOS |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |

# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 255

SPECrate2017_fp_peak = 259

**CPU2017 License:** 9066
**Test Sponsor:** New H3C Technologies Co., Ltd.
**Tested by:** New H3C Technologies Co., Ltd.

**Test Date:** Apr-2019
**Hardware Availability:** Jul-2017
**Software Availability:** Apr-2019

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 112 | 2310 | 486 | **2310** | **486** | 2312 | 486 | 112 | 2311 | 486 | **2310** | **486** | 2310 | 486 |
| 507.cactuBSSN_r | 112 | 616 | 230 | **616** | **230** | 615 | 231 | 112 | **616** | **230** | 615 | 231 | 616 | 230 |
| 508.namd_r | 112 | **442** | **241** | 441 | 241 | 442 | 241 | 112 | 441 | 241 | 440 | 242 | **441** | **241** |
| 510.parest_r | 112 | 2424 | 121 | **2426** | **121** | 2433 | 120 | 112 | **2424** | **121** | 2419 | 121 | 2427 | 121 |
| 511.povray_r | 112 | 744 | 352 | 737 | 355 | **742** | **352** | 112 | **631** | **415** | 632 | 414 | 629 | 416 |
| 519.lbm_r | 112 | 991 | 119 | 991 | 119 | **991** | **119** | 112 | 991 | 119 | **991** | **119** | 991 | 119 |
| 521.wrf_r | 112 | 1145 | 219 | **1144** | **219** | 1142 | 220 | 112 | 1129 | 222 | 1205 | 208 | **1130** | **222** |
| 526.blender_r | 112 | 521 | 327 | 521 | 327 | **521** | **327** | 112 | **522** | **327** | 659 | 259 | 521 | 327 |
| 527.cam4_r | 112 | 581 | 337 | 585 | 335 | **582** | **337** | 112 | 572 | 343 | 758 | 258 | **574** | **342** |
| 538.imagick_r | 112 | 377 | 739 | **377** | **739** | 376 | 740 | 112 | 377 | 739 | 376 | 741 | **376** | **740** |
| 544.nab_r | 112 | **355** | **531** | 356 | 529 | 354 | 532 | 112 | 356 | 530 | 357 | 528 | **356** | **529** |
| 549.fotonik3d_r | 112 | 2783 | 157 | 2779 | 157 | **2781** | **157** | 112 | **2778** | **157** | 2778 | 157 | 2778 | 157 |
| 554.roms_r | 112 | 1860 | 95.7 | **1867** | **95.3** | 1872 | 95.1 | 112 | 1858 | 95.8 | 1862 | 95.6 | **1862** | **95.6** |

**SPECrate2017_fp_base = 255**

**SPECrate2017_fp_peak = 259**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/ia32:/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-32:/home/speccpu/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
```

**(Continued on next page)**

## General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

## Platform Notes

```
BIOS Settings:
 Set SNC to Enabled
 Set IMC Interleaving to 1-way Interleaving
 Set Autonomous Core C-State to Enabled
 Set Package C state to No Limit
 Set Patrol Scrub to Enabled
 Set XPT Prefetcher to Enabled
 Set Intel VT for Directed I/O (VT-d) to Disabled
 Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on localhost.localdomain Wed Apr 17 03:29:06 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
       2  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                112
      On-line CPU(s) list:   0-111
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             2
      NUMA node(s):          4
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      Stepping:              4
      CPU MHz:               3558.807
      CPU max MHz:           3800.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5000.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
      ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
      clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc
      cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window
      hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_l1d

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
    79
    node 0 size: 96919 MB
    node 0 free: 80900 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
    82 83
    node 1 size: 98304 MB
    node 1 free: 84314 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
    101 105 106 107
    node 2 size: 98304 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 2 free: 84432 MB
   node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
   108 109 110 111
   node 3 size: 98304 MB
   node 3 free: 83462 MB
   node distances:
   node   0   1   2   3
     0:  10  11  21  21
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       394621704 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.6 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.6"
       PRETTY_NAME="OpenShift Enterprise"
    redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-957.10.1.el7.x86_64 #1 SMP Thu Feb 7 07:12:53 UTC
    2019 x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Mitigation: PTI
 CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

 run-level 3 Apr 16 17:45

 SPEC is set to: /home/speccpu
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda5      xfs   839G   88G  752G  11% /home
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 2.00.25P51 04/04/2019
   Memory:
    24x Hynix HMA82GR7AFR8N-VK 16 GB 2 rank 2666

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
 CC  519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   519.lbm_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 508.namd_r(base) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 508.namd_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  511.povray_r(base) 526.blender_r(base, peak)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
FC   554.roms_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   521.wrf_r(peak) 527.cam4_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
```
icc -m64 -std=c11
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:
```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:
```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

## Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

519.lbm_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

538.imagick_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

544.nab_r: `Same as 538.imagick_r`

C++ benchmarks:

508.namd_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

510.parest_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Fortran benchmarks:

503.bwaves_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

549.fotonik3d_r: `Same as 503.bwaves_r`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-16 15:29:06-0400.
Report generated on 2019-05-15 13:27:27 by CPU2017 PS formatter v6067.
Originally published on 2019-05-14.