SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Platinum 8276M)

SPECrate2017_int_base = 291

SPECrate2017_int_peak = 304

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

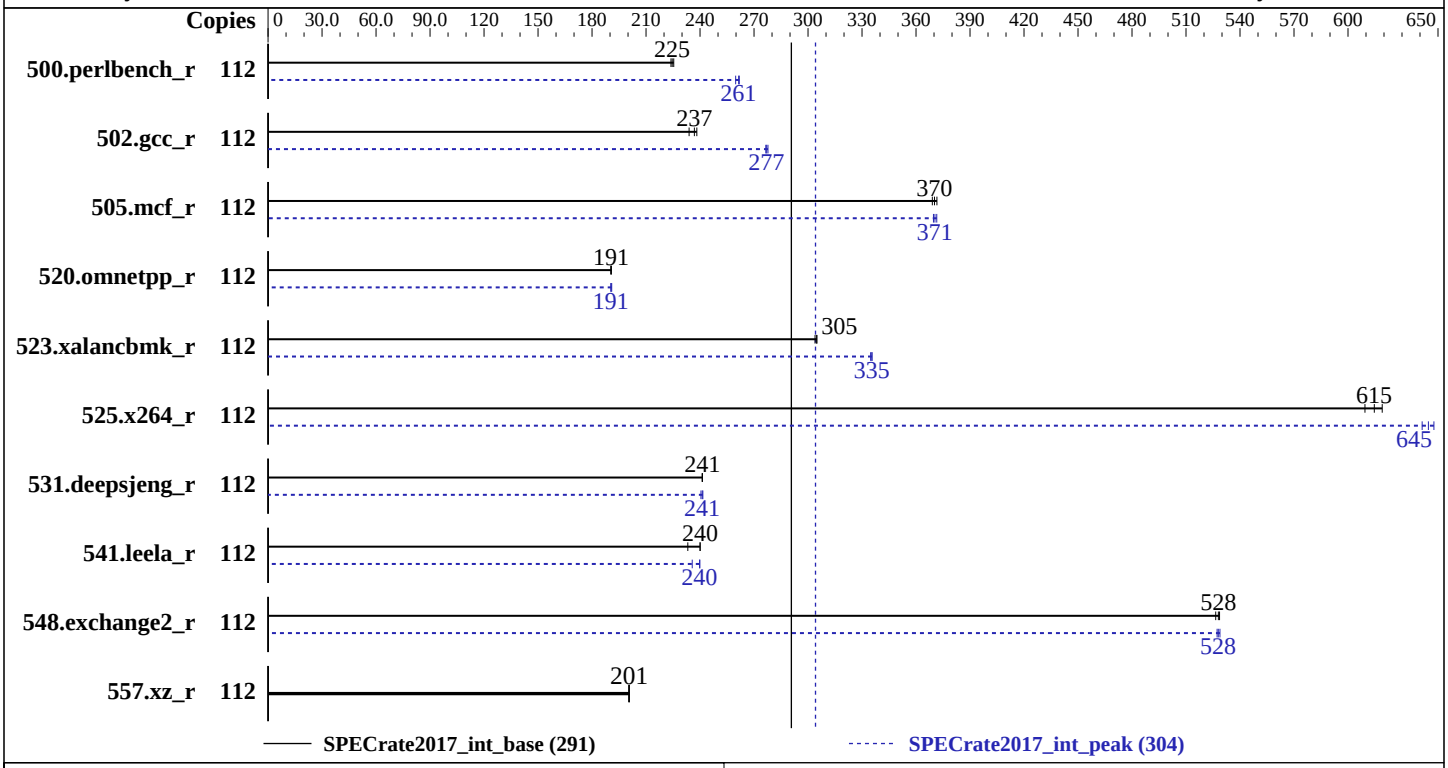

Hardware

CPU Name:	Intel Xeon Platinum 8276M
Max MHz.:	4000
Nominal:	2200
Enabled:	56 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
Storage:	1 x 1200 GB SAS, 10000 RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	No
Firmware:	Version 6.52 Released Mar-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Platinum 8276M)

SPECrate2017_int_base = 291

SPECrate2017_int_peak = 304

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	**794**	**225**	797	224	791	225	112	686	260	681	262	**682**	**261**
502.gcc_r	112	**670**	**237**	678	234	666	238	112	**573**	**277**	571	278	573	277
505.mcf_r	112	490	369	487	372	**489**	**370**	112	**488**	**371**	487	372	490	370
520.omnetpp_r	112	770	191	**771**	**191**	772	190	112	**771**	**191**	771	190	770	191
523.xalancbmk_r	112	**388**	**305**	389	304	388	305	112	**353**	**335**	352	336	353	335
525.x264_r	112	**319**	**615**	322	609	317	619	112	303	648	**304**	**645**	306	641
531.deepsjeng_r	112	532	241	**532**	**241**	532	241	112	**532**	**241**	534	241	531	242
541.leela_r	112	795	233	**773**	**240**	773	240	112	773	240	**774**	**240**	787	236
548.exchange2_r	112	555	529	557	527	**556**	**528**	112	557	527	555	529	**556**	**528**
557.xz_r	112	603	201	**603**	**201**	604	200	112	603	201	**603**	**201**	604	200

SPECrate2017_int_base = 291

SPECrate2017_int_peak = 304

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Power Policy Set to Performance
SNC Set to Enabled
IMC Interleaving Set to 1-way Interleave
XPT Prefetch Set to Enabled
Sysinfo program /spec2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on sles12sp4 Thu Apr 18 06:33:08 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8276M CPU @ 2.20GHz
      2  "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                112
     On-line CPU(s) list:   0-111
     Thread(s) per core:    2
     Core(s) per socket:    28
     Socket(s):             2
     NUMA node(s):          4
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
```

(Continued on next page)

Platform Notes (Continued)

```
      Model name:            Intel(R) Xeon(R) Platinum 8276M CPU @ 2.20GHz
      Stepping:              7
      CPU MHz:               2200.000
      CPU max MHz:           4000.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
      NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
      NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
      NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
      mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
      clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
      avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
    79
    node 0 size: 95184 MB
    node 0 free: 94707 MB
    node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
    82 83
    node 1 size: 96742 MB
    node 1 free: 96420 MB
    node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
    101 105 106 107
    node 2 size: 96713 MB
    node 2 free: 96174 MB
    node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
    108 109 110 111
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 size: 96531 MB
  node 3 free: 96143 MB
  node distances:
  node   0   1   2   3
    0:  10  11  21  21
    1:  11  10  21  21
    2:  21  21  10  11
    3:  21  21  11  10

From /proc/meminfo
   MemTotal:       394414884 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 4
      # This file is deprecated and will be removed in a future service pack or release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP4"
      VERSION_ID="12.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
   Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Apr 18 06:29

SPEC is set to: /spec2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   700G   14G  687G   2% /
```

(Continued on next page)

Platform Notes (Continued)

```
 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS INSYDE Corp. 6.52 03/16/2019
   Memory:
    24x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
CC   502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
 CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
      peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):
icpc -m64

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)

Peak Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -fno-strict-overflow -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4 -fno-alias -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

(Continued on next page)

Peak Optimization Flags (Continued)

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-18 06:33:08-0400.
Report generated on 2019-05-15 13:33:56 by CPU2017 PS formatter v6067.
Originally published on 2019-05-14.